


Tadpole



Order Code	Tadpole.col temp.optic.finish
Example	Tadpole.2800K.60°.aluminium

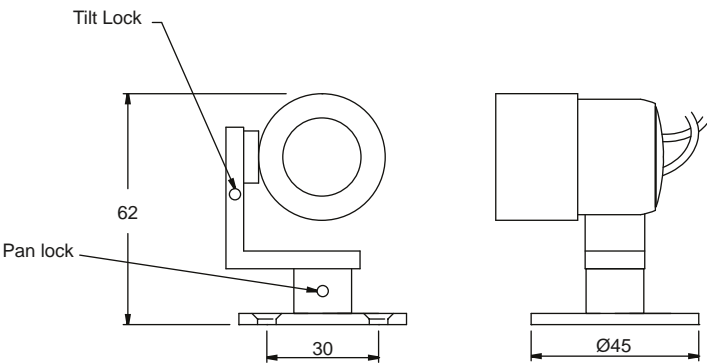

Materials:	Aluminium, toughened glass
Lamp:	MSL Star (1 x Cree XPE)
IP rating:	IP66
Finish:	Anodised or painted any RAL colour
Dimming:	1-10V, DMX, DALI or Mains Dim
Supply:	Remote driver required Allow 2.3W at 700mA or 1.1W at 350mA
Locking:	1.5mm allen key required
Available tilt:	±90°
Weight:	0.2kg
Description:	Lockable IP66 rated mini spotlight for accent lighting
Accessories:	Ø20mm optics. See technical section on our website for beam angle options.

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

Each LED “lamp” consists of one or more CREE XPE power LED thermally bonded to an aluminium cored printed circuit board. Colour temperatures of 2800K, 3000K, 3500K, 5000K and 6500K can be specified as can Amber, Red, Green or Blue.



MSL Star
Ø21mm PCB with a single LED. Ø20mm XPE Optics

For driver information see LED driver spec sheet.