


Firefly



Order Code	Firefly.col temp.finish
Example	Firefly.3000K.clear anodised

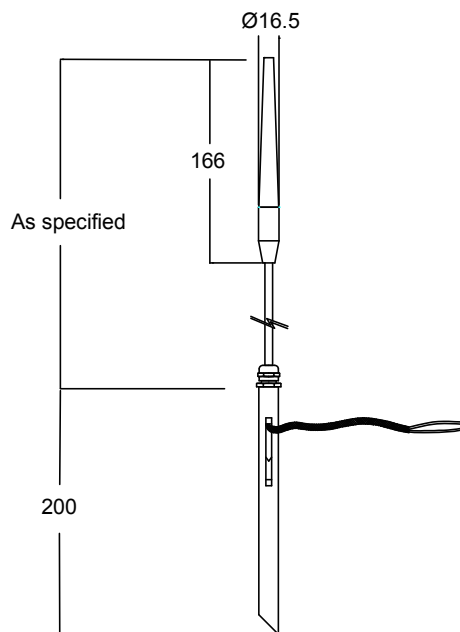

Materials:	Aluminium, acrylic, carbon fibre wand
Lamp:	Type S (1 x Osram Oslon Square)
Finish:	Anodised aluminium and carbon fibre wand
Dimming:	1-10V, DALI, DMX or Mains Dim
Driver:	Remote driver required Allow 1.4W at 500mA
Locking:	N/A
Available Tilt:	N/A
Weight:	Dependent on length of wand, approx 1kg
Description:	IP66 rated LED luminaire with ground spike suitable for lighting pathways or borders.
Accessories:	N/A

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

The Type S PCB uses 1 x Osram Oslon Square power LED thermally bonded to an aluminium PCB.

