




**Round Recessed LED IP54 Downlight**

- Die cast aluminium housing with silicone water seal
- Toughened frosted glass to the front
- Passive extruded aluminium heatsink
- Protected from water spray in any direction and dust – IP54
- XTM Xicato remote phosphor LED technology
- Ra83 Standard/Ra83 Vibrant colour rendering up to 1300 lumens
- Ra98 Artist/Ra95 Vibrant colour rendering up to 1300 lumens
- System efficacy up to 129 lm/w
- LED module life rating at 50,000hrs L70/C3
- 1x2 step MacAdams over life
- 5 year warranty on LED system
- Colour consistent over life
- Dimming available
- UK design and manufacture

**Product Code**

Product	QPR	Round Downlight IP54
Reflector Size	15T	50mm Diameter
Drivers	S	Standard Driver
	D	Dali Driver
	B	DSI Driver
	A	1-10V Dimming Driver
	T	Triac Driver
Lumens	04	400 Lumens*
	07	700 Lumens
	10	1000 Lumens
	13	1300 Lumens
Colour Temperature	27	2700 Kelvin
	30	3000 Kelvin
	35	3500 Kelvin
	40	4000 Kelvin
	RA (Colour Rendering)	K
A		Ra98 Artist Series
V		Ra83 Vibrant
R		Ra95 Vibrant
Beam Angle (9mm LES)	16	16° Twist-lock Reflector
	24	24° Twist-lock Reflector
	40	40° Twist-lock Reflector
Beam Angle (19mm LES)	4T	40° Twist-lock Reflector
	6T	60° Twist-lock Reflector
Body Colour	W	White
	C	Chrome Polished
Extras	0	No Attachment
	1	3 Hour Emergency Pack
	2	Self-Test 3 Hour Emergency Pack
	3	3 Hours Emergency DALI EM Pro

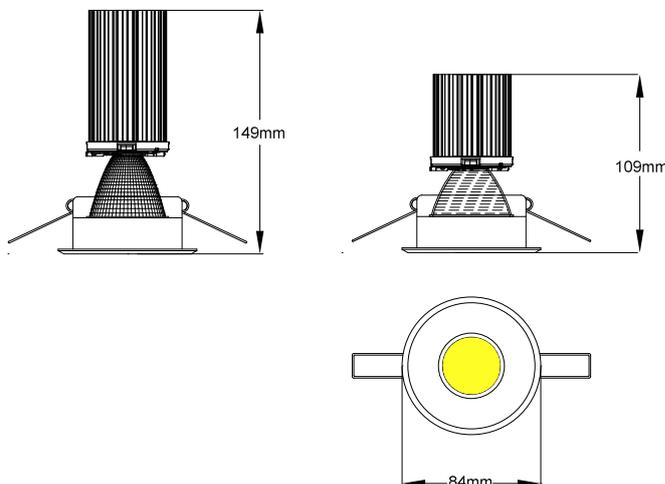

Cut out size: 73mm

\* Not available with 60° reflector

