

SPECIFICATIONS

POWER CONSUMPTION

22 W/M | 0.9 A | DC

CUTTING INTERVALS

24V 7 LED 55MM

OPERATING TEMPERATURE

0 - 50°C

PRODUCT OPTIONS


Power Supplies


Cables


Profiles


Connectors


PCB Colour


TECHNICAL DATA

IP OPTIONS	DIMENSIONS (mm)	PACKAGE WEIGHT	PACKAGE SIZE (mm)	LED TYPE	LIFESPAN	POWER SOURCE	PRODUCT LENGTH	DIMMABLE	ENERGY CONSUMPTION	EFFICIENCY CLASS	CRI	BEAM ANGLE
IP 20	1.7 x 12	129g	240 x 210 x 10	SMD CHIP 5630	5 YEARS	24 VDC	5m	YES	2.2 KWh/1000h	A++	95+	120°
IP 67	4.5 x 14	342g	245 x 255 x 16									

PRODUCT TYPE

COLOUR	VOLTAGE	IP RATING	LED QTY/M	WATTAGE/M	COLOUR TEMPERATURE	LUMINOUS EFFICIENCY	LUMEN/M	DOMINANT WAVELENGTH (nm)	PITCH	SKU
WARM WHITE	24V	20	126	2.2	2700K	81.81Lm/W	1800	-	7.94mm	010-3401
WARM WHITE	24V	67	126	2.2	2700K	81.81Lm/W	1800	-	7.94mm	010-3404
NATURE WHITE	24V	20	126	2.2	4000K	90.9Lm/W	2000	-	7.94mm	010-3402
NATURE WHITE	24V	67	126	2.2	4000K	90.9Lm/W	2000	-	7.94mm	010-3405
PURE WHITE	24V	20	126	2.2	6000K	95.45Lm/W	2100	-	7.94mm	010-3403
PURE WHITE	24V	67	126	2.2	6000K	95.45Lm/W	2100	-	7.94mm	010-3406

PRODUCT DIMENSIONS

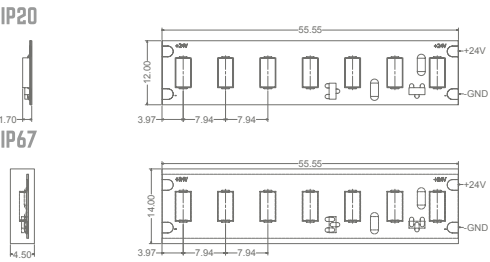

LUMEN OUTPUT



3 STEP MACADAM

PRO EXTREME FLEX 126

Pro Extreme 126 emits over 2000 lumens per metre, where some Linear LED fixtures require multiple lengths to reach this specification. Designed with constant current technology that allows lengths over the standard 5 metres with one power feed. Colour rendering index of 95+ and available in different colour temperatures ranging from 2700K to 6000K, also available in IP67.