

SPECIFICATIONS

POWER CONSUMPTION

15 W/M | 0.6 A | DC


CUTTING INTERVALS


24V 7 LED 100MM


OPERATING TEMPERATURE


0 - 50°C


PRODUCT OPTIONS


Power Supplies


Cables


Profiles


Connectors


PCB Colour

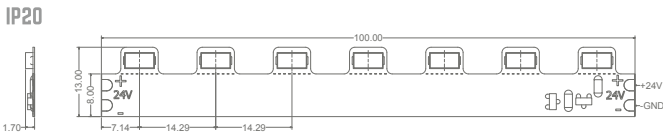
TECHNICAL DATA

IP OPTIONS	DIMENSIONS (mm)	PACKAGE WEIGHT	PACKAGE SIZE (mm)	LED TYPE	LIFESPAN	POWER SOURCE	PRODUCT LENGTH	DIMMABLE	ENERGY CONSUMPTION	EFFICIENCY CLASS	CRI	BEAM ANGLE
IP 20	1.7 x 13	245g	245 x 255 x 15	SMD CHIP 5630	5 YEARS	24 VDC	5m	YES	1.5 KWh/1000h	A++	90+	120°

PRODUCT TYPE

COLOUR	VOLTAGE	IP RATING	LED QTY/M	WATTAGE/M	COLOUR TEMPERATURE	LUMINOUS EFFICIENCY	LUMEN/M	DOMINANT WAVELENGTH (nm)	PITCH	SKU
WARM WHITE	24V	20	70	15	2700K	86.67Lm/W	1300	-	14.29mm	010-3901
NATURE WHITE	24V	20	70	15	4000K	93.33Lm/W	1400	-	14.29mm	010-3902
PURE WHITE	24V	20	70	15	6000K	100Lm/W	1500	-	14.29mm	010-3903

PRODUCT DIMENSIONS



LUMEN OUTPUT



3 STEP MACADAM

PRO EXTREME
SIDE FLEX 70

Pro Extreme Side Flex 70 has a unique layout when compared to traditional LED strip lights. Designed with 70 high powered LED chips per metre, this product combines versatility and practicality. Producing 1500 lumens per metre, illuminating curves and corners becomes a simple task. Manufactured with constant current technology and high colour rendering index, available in different colour temperatures ranging from 2700K to 6000K.