



DURO FLEX SINGLE COLOUR

Duro Flex Single Colour is perfectly suited to harsh outdoor environments, due to its durability and weather resistance coating. Duro Flex Single Colour is also UV and saltwater resistant. Our unique heat management system and 4oz PCBs enable's more current to flow through upto 10 meters of flex, without any voltage drop. Duro Flex Single Colour is ideal for building exteriors and marine environments that need a reliable Plug'n Play system requiring low maintenance.

SPECIFICATIONS

POWER CONSUMPTION

6-12 W/M | 0.25-0.5 A | DC


CUTTING INTERVALS

24V 6-7 LED 100-200MM

OPERATING TEMPERATURE

0 - 50°C

PRODUCT OPTIONS

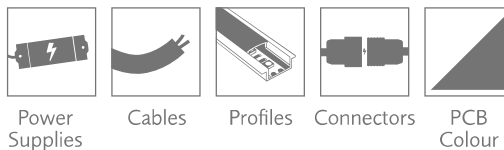


TECHNICAL DATA

IP OPTIONS	DIMENSIONS (mm)	PACKAGE WEIGHT/100M	PACKAGE SIZE (mm)	LED TYPE	LIFESPAN	POWER SOURCE	PRODUCT LENGTH	DIMMABLE	ENERGY CONSUMPTION	EFFICIENCY CLASS	CRI	BEAM ANGLE	OPERATING TEMP.
IP 67	5.7 x 15.25	15Kg	587 x 462 x 165	SMD CHIP 5050	5 YEARS	24 VDC	10M	YES	0.6 - 1.2 KWh/1000h	A++	85+	150°	-20° - +50°C

PRODUCT TYPE

COLOUR	VOLTAGE	IP RATING	LED QTY/M	WATTAGE/M	COLOUR TEMPERATURE	LUMINOUS EFFICIENCY	LUMEN/M	DOMINANT WAVELENGTH (nm)	PITCH MM	SKU
WHITE 2400K 30	24V	67	30	6	2400K	75	450	-	33.33mm	010-5201
WHITE 2700K 30	24V	67	30	6	2700K	75	450	-	33.33mm	010-5202
WHITE 4000K 30	24V	67	30	6	4000K	75	450	-	33.33mm	010-5205
WHITE 5000K 30	24V	67	30	6	5000K	75	450	-	33.33mm	010-5207
WHITE 6500K 30	24V	67	30	6	6500K	75	450	-	33.33mm	010-5209
WHITE 2400K 60	24V	67	60	12	2400K	75	900	-	16.67mm	010-5101
WHITE 2700K 60	24V	67	60	12	2700K	75	900	-	16.67mm	010-5102
WHITE 4000K 60	24V	67	60	12	4000K	75	900	-	16.67mm	010-5105
WHITE 5000K 60	24V	67	60	12	5000K	75	900	-	16.67mm	010-5107
WHITE 6500K 60	24V	67	60	12	6500K	75	900	-	16.67mm	010-5109

PRODUCT DIMENSIONS

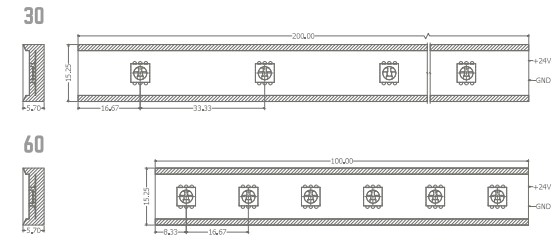

LUMEN OUTPUT

