

SPECIFICATIONS

POWER CONSUMPTION

20 W/M | 0.83 A | DC


CUTTING INTERVALS

24V 6 LED 50MM

OPERATING TEMPERATURE

0 - 50°C

PRODUCT OPTIONS

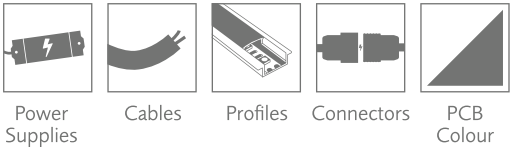


TECHNICAL DATA

IP OPTIONS	DIMENSIONS (mm)	PACKAGE WEIGHT	PACKAGE SIZE (mm)	LED TYPE	LIFESPAN	POWER SOURCE	PRODUCT LENGTH	DIMMABLE	ENERGY CONSUMPTION	EFFICIENCY CLASS	CRI	BEAM ANGLE
IP 20	1.5 x 12	141g	235 x 210 x 10	SMD CHIP 3328	5 YEARS	24 VDC	5M	YES	2 KW/h/1000h	A++	80+	120°
IP 65	4.7 x 14	492g	255 x 245 x 15									

PRODUCT TYPE

COLOUR	VOLTAGE	IP RATING	LED QTY/M	WATTAGE/M	COLOUR TEMPERATURE	LUMINOUS EFFICIENCY	LUMEN/M	DOMINANT WAVELENGTH (nm)	PITCH MM	SKU
PURE WHITE	24V	20	120	20	5000K	138Lm/W	2760	-	8.33mm	010-0801
PURE WHITE	24V	65	120	20	5000K	138Lm/W	2760	-	8.33mm	010-0804
NATURAL W	24V	20	120	20	4000K	138Lm/W	2760	-	8.33mm	010-0807
NATURAL W	24V	65	120	20	4000K	138Lm/W	2760	-	8.33mm	010-0808
WARM WHITE	24V	20	120	20	2700K	138Lm/W	2760	-	8.33mm	010-0802
WARM WHITE	24V	65	120	20	2700K	138Lm/W	2760	-	8.33mm	010-0803

PRODUCT DIMENSIONS

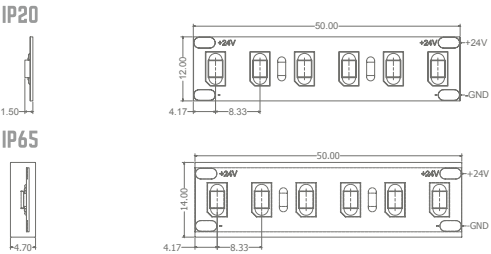

LUMEN OUTPUT



ULTRA INTENSE 120

Ultra Intense 120 utilises the same SMD chip as the Ultra Intense 60 yet offers double the output. It does all this whilst retaining a slim profile. This optimum output makes it ideal for lighting larger spaces effectively. We also offer this LED Flex in a waterproof IP rated coating for outdoor applications.