


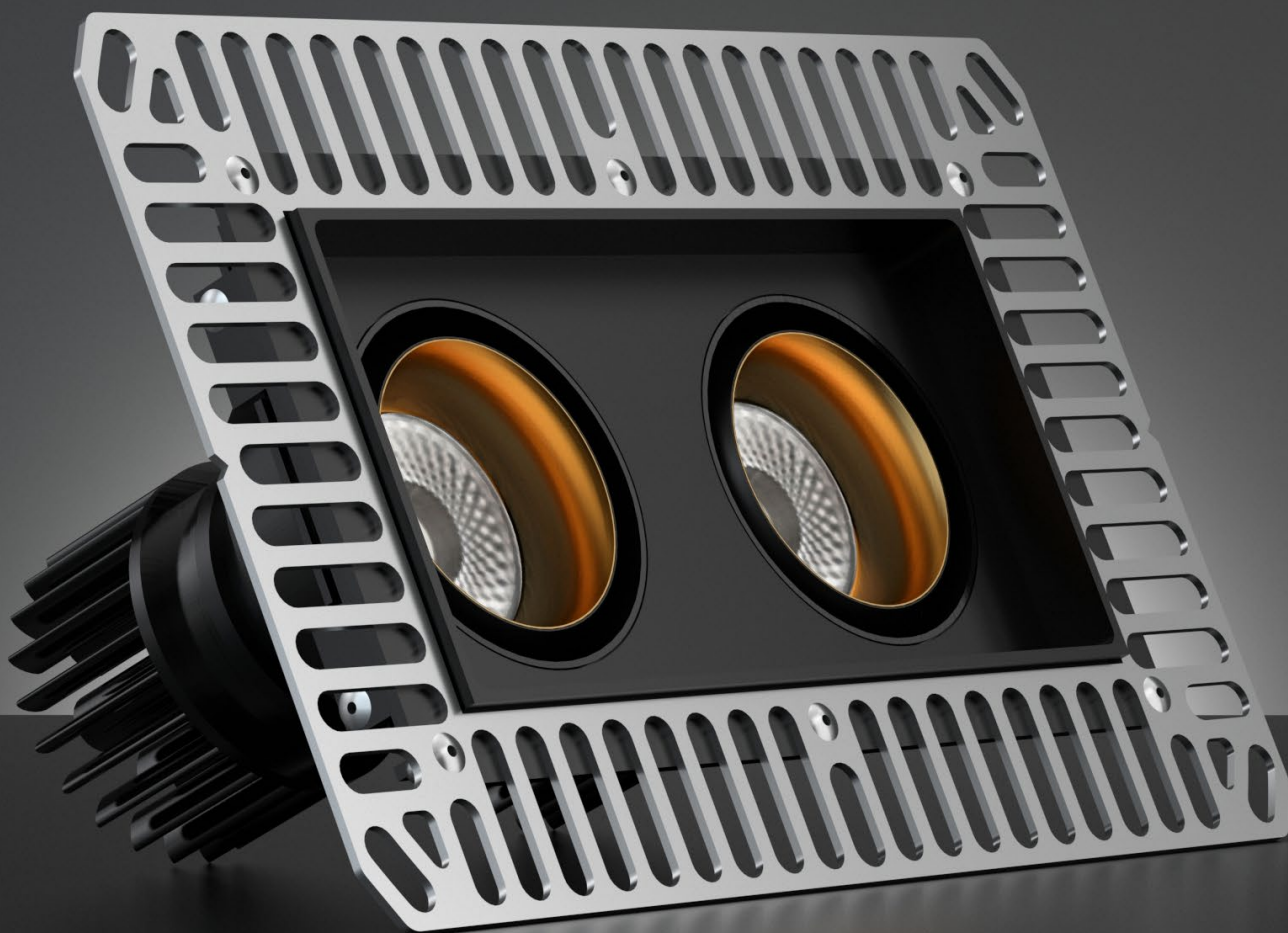

PHOS
ENGINEERING LIGHT

EYECONIC TWIN RECESSED
TRIMLESS ADJUSTABLE
STANDARD

EYECONIC TWIN RECESSED TRIMLESS ADJUSTABLE - STANDARD

The Eyeconic Twin Recessed Trimless Adjustable is a recessed, directional downlight with a 60x120mm aperture and features a beautifully sculpted anti-glare baffle with a trimless plaster-in frame.

PRODUCT FEATURES

Downlight

Adjustable

Interior

LED

IP65

Available in all Phos finishes

Interchangeable optics & accessories (pre & post install)

PHOS STANDARDS

60min fire-certified

Acoustic-rated

UK designed, manufactured and assembled

5 year warranty

OPTICS

Standard beam angles:
10° / 20° / 30° / 50°

Ellipsoidal accessories using:

10° optic: 14.8° x 53.2°

20° optic: 24.1° x 58.8°

30° optic: 37.5° x 66.3°

50° optic: 45.8° x 72.6°

PHYSICAL PROPERTIES

Height 79mm (4W/9W)


Height 102mm (14W)

Cut-out 140 X 182


DRIVER INFORMATION

[Driver Configurator \(Link\)](#)


PRODUCT VIEW

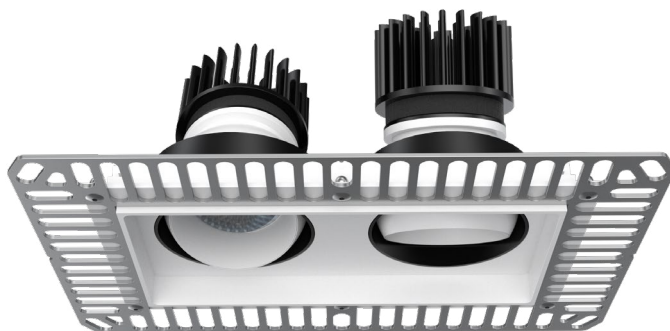

DIMENSIONS

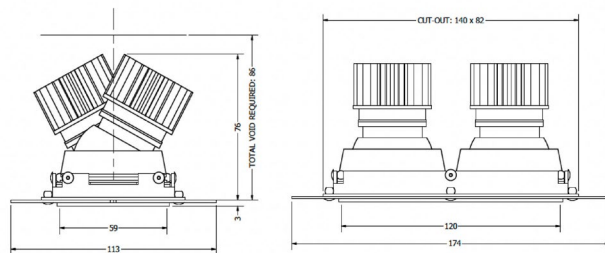

4W & 9W

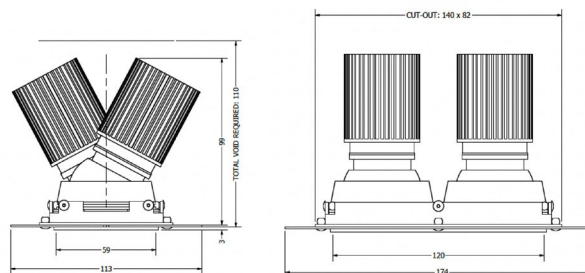

14W

TECHNICAL SPECIFICATIONS


CCT	2700K											
Wattage	4W (x2)				9W (x2)				14W (x2)			
Beam Angles	10°	20°	30°	50°	10°	20°	30°	50°	10°	20°	30°	50°
Luminaire Lumens (lm)	348	303	296	310 (x2)	572	489	485	504 (x2)	732	650	630	669 (x2)
Circuit Watts (c/W)	6	6	5.9	5.9 (x2)	10.8	10.5	10.5	10.5 (x2)	16.2	15.5	15.5	15.5 (x2)
Luminaire Efficacy (l/cW)	58	51	50	52	53	47	46	48	45	42	41	43
Luminance (Cd)	5820	1521	888	381 (x2)	9592	2507	1476	632 (x2)	13460	3321	1969	832 (x2)
Forward Voltage (Vf)	11.78				12.36				12.65			
Current (mA)	350				700				1050			

CCT	3000K											
Wattage	4W (x2)				9W (x2)				14W (x2)			
Beam Angles	10°	20°	30°	50°	10°	20°	30°	50°	10°	20°	30°	50°
Luminaire Lumens (lm)	378	342	336	355 (x2)	635	580	564	597 (x2)	893	772	772	801 (x2)
Circuit Watts (c/W)	5.9	5.9	5.9	5.9 (x2)	10.6	10.5	10.6	10.5 (x2)	15.8	15.7	15.7	15.6 (x2)
Luminaire Efficacy (l/cW)	64	58	57	61	60	55	54	57	57	49	49	51
Luminace (Cd)	5827	1674	1018	442 (x2)	9895	2855	1745	753 (x2)	14115	4027	2529	1031 (x2)
Forward Voltage (Vf)	11.78				12.36				12.65			
Current (mA)	350				700				1050			


Binning	2 step MacAdams
CRI	90+
TM-30-15	Rg 101 Rf 90
Lumen Maintenance	LM80
Lifetime	50,000 hours
Dimming Options	Mains dim / Non-dim / 0-10V / DALI (dim to dark 0.01%) / Casambi
Flicker Index	0
SVM: (Visual Flicker)	0.02
Driver distance from fitting	Up to 10m (AWG 20)*
Wiring Type	Series
Accessories	Remote emergency (Maintained / Self Test)

*If driver distance from fitting is +10m see driver configurator document for guidance

LIGHT CONES

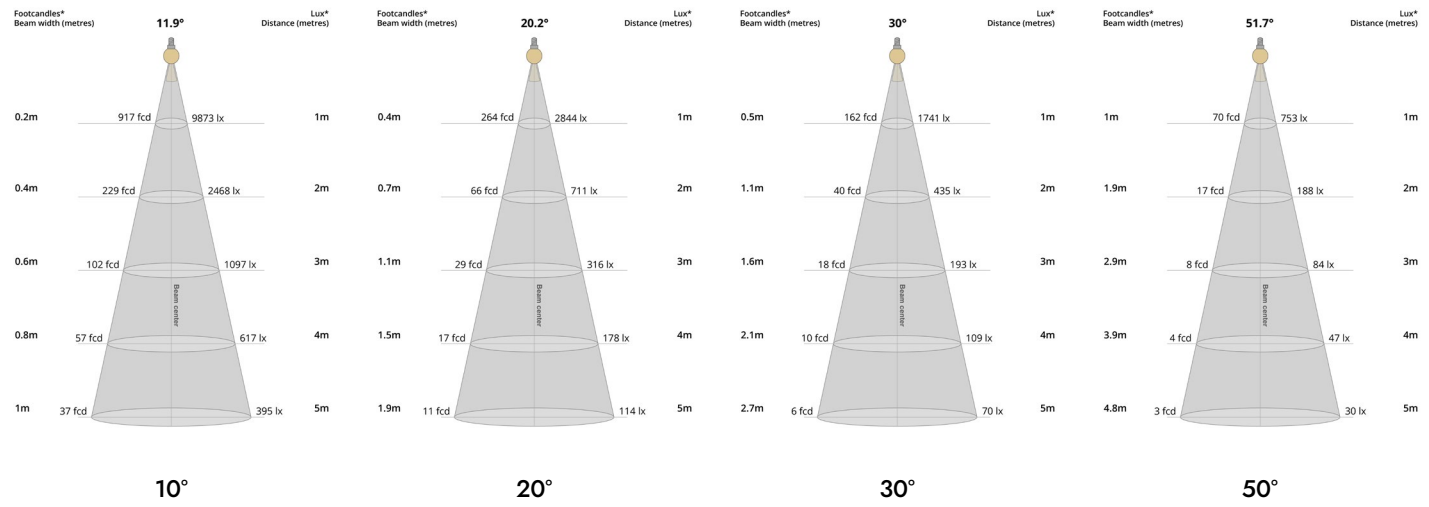

POLAR CURVES

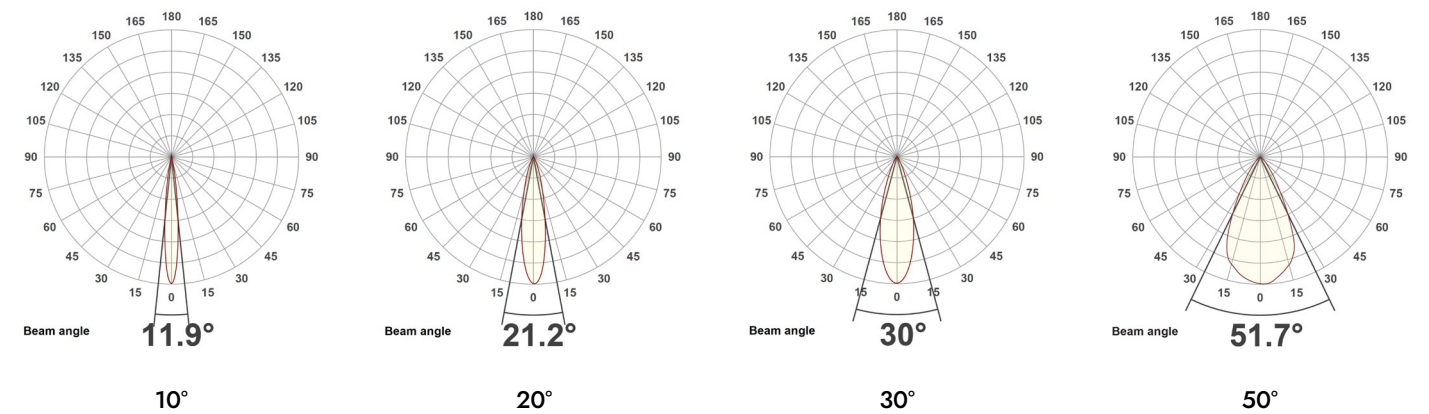

LUMINAIRE PARTCODE BUILDER

Example Code: EY-TA-WT/WT-STD14-30-90-20-1050

Family	Variant	Outer Baffle Finish	Inner Baffle Finish	Engine	Power	CCT	CRI	Beam Angle	Driver Current
EY Eyeconic	TA Trimless Adjustable	WT White Textured	WT White Textured	STD Standard	4 Watts	27 2700K	90	10	350
		B1 Anodised Black	B1 Anodised Black		9 Watts	30 3000K		20	700
		*C Custom	*C Custom		14 Watts	40 4000K		30	1050
								50	

FRAME PARTCODE BUILDER

Example Code: TFR-RSQ2-WT/WT/B1

Variant	Frame Finish	Bezel Finish	Socket Finish
TFR-RSQ2 Twin Trimless Recessed Square Frame	WT Textured White B1 Anodised Black *C Custom	WT White Textured B1 Anodised Black *C Custom	B1 Anodised Black

*Codes for custom finishes can be found on the page 7.

ACCESSORIES (multiple inserts available per fitting)



Commissioning Tool (Plastic)
ACCS-TOOL-P-BAFFLE



SNOOT
ACCS-SNOOT



Honeycomb Recessed
ACCS-RECESSED-HCOMB



Honeycomb Flush
ACCS-FLUSH-HCOMB



Softening Insert Recessed
ACCS-RECESSED-SOFT



Softening Insert Flush
ACCS-FLUSH-SOFT



Opal Insert Recessed
ACCS-RECESSED-OPAL



Opal Insert Flush
ACCS-FLUSH-OPAL



Elliptical Insert Recessed
ACCS-RECESSED-10X60ELLIPTICAL



Elliptical Insert Flush
ACCS-FLUSH-10X60ELLIPTICAL



Colour Change Insert Recessed
ACCS-RECESSED-FILTER18K
ACCS-RECESSED-FILTER22K
ACCS-RECESSED-FILTER24K
ACCS-RECESSED-FILTER25K



Colour Change Insert Flush
ACCS-FLUSH-FILTER18K
ACCS-FLUSH-FILTER22K
ACCS-FLUSH-FILTER24K
ACCS-FLUSH-FILTER25K

FINISHES

Every element of your light can be finished in any of the options below:

PLATED (Interior ONLY)



Antique Bronze
01



Antique Brass
02




Polished Chrome
03



Satin Nickel
04



Polished Copper
05



Satin Copper
06



Polished Brass
09

ANODISED (Interior ONLY, except Orba Exteriors)



Tuba Brass
11



Antique Gold
12



Espresso Bronze
13



Cocoa Bronze
14




Ice Gold
15




Mocha Bronze
16



Taupe Bronze
17



24K Gold
18



Champagne Gold
19



Anodised Black (9005)
B1


POWDER COAT (Interior & Exterior)



Pure White (9010)
W1



Textured White (9010)
WT



Textured Black (9005)
BT



RAL Classic
www.phos.co.uk/finishes



RAL Design
price on application