

NEO 360 D18

Flexible LED Light Tube, diameter 18mm, 360° output
Tube de lumière LED flexible, diamètre 18mm, faisceau 360°
A4318



Temperature de couleur CCT
2300K | 2700K | 3000K | 4000K | DW 2300K - 4000K | RGB | R / G / B / Y

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | 82 / 92+

Puissance lumineuse & Angle ouverture Luminous output & Beam angle
(@4000K) 800 lm & 360°

Puissance Power
15 w/m

Coupe Cutting Unit
12 mm (W) | 31mm (DW) | 50mm (RGB) | 42mm (R / G / B / Y)

Dimensions & Rayon courbure mini Dimensions & min. bending radius
5000 x D18mm | R > 120 mm

Indices de protection & normes Standards
IP65 | IK08 | LM80 | CE | UL Listed
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 20°C / + 40°C



A4318.930.IP65.DALI

CCT & luminous flux

2300K	700 lm/m	823/923
2700K	700 lm/m	827/927
3000K	800 lm/m	830/930
4000K	800 lm/m	840/940

2300K/4000K 375+375 lm/m DW

Red	620/630 nm	R
Green	525/530 nm	G
Blue	465/470 nm	B
Yellow	587/592 nm	Y

RGB 400 lm RGB

IP Rating
IP 65

IP65

Dimming
No dimming

HF

Dali

DALI

Dmx



DMX

Dimming 1 to 10VDC


D10

Phase Dimming Digital


PHA

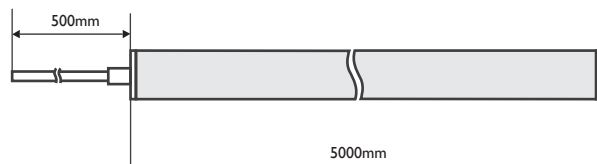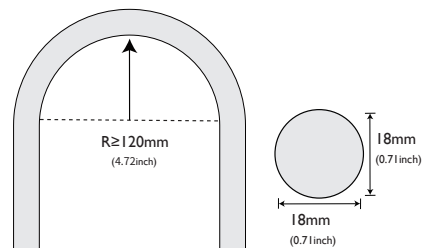

PHOTOMETRIC OF 1M STRIP



360° beam angle
photometry of 1m

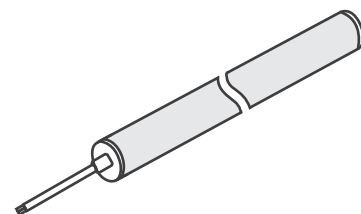

A4318.CLP
Plastic Clip
25mm



A4318.TRP
Plastic Rail
1000mm



A4318.CLF
Flat mounting clip
25mm



A4318.ECS
End cap set



A4318.ECC
End cap set for cable



A4318.PDC
Pendant cable

ATEA

