

NEO 360 D25 DISTANCE

Flexible LED Light Tube, 360° output, 48v, up to 20 meters
Tube de lumière LED flexible, sortie à 360°, 48v, jusqu'à 20m
A4328



Temperature de couleur CCT
2300K | 2700K | 3000K | 4000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | 82 / 92+

Puissance lumineuse & Angle ouverture Luminous output & Beam angle
(@4000K) 980 lm & 360°

Puissance Power
13 w/m



Coupe Cutting Pace
83.33 mm

Dimensions & Rayon courbure mini Dimensions & min. bending radius
20 000 x D25 mm | R > 120 mm


Indices de protection & normes Standards
IP65 | IK08 | LM80 | CE | UL Listed
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
48Vdc | class III

Température d'utilisation Ambient temperature
- 20°C / + 40°C

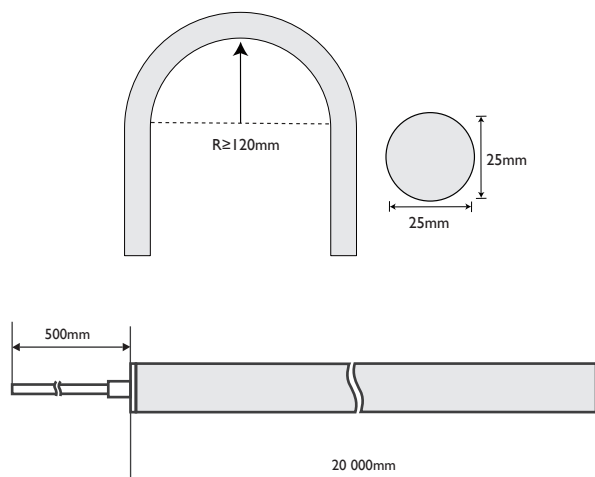

360° beam angle
photometry of 1m

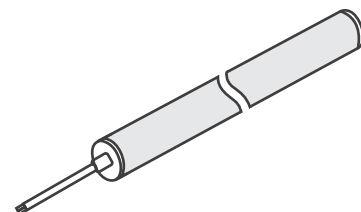

CCT & luminous flux

2300K	810 lm/m
2700K	880 lm/m
3000K	950 lm/m
4000K	980 lm/m

IP Rating

IP 65

Dimming

No dimming

Dali

Dmx

Dimming 1 to 10VDC

Phase Dimming Digital

A4328.930.IP65.DALI

823/923
827/927
830/930
840/940

IP65

HF
DALI
DMX
D10
PHA



A4113.D25.CLIP
Plastic Clip
25mm



A4113.D25.TRP
Plastic Rail
1000mm



A4113.D25.CLF
Flat mounting clip
25mm



A4113.D25.ECS
End cap set



A4113.D25.ECC
End cap set for cable



A4113.D25.PDC
Pendant cable

ATEA

