

ULTRA EFFICIENCY 90

Linear strip with ultra efficiency >165 lm/w and cri90

Ruban ultra efficacité >165 lm/w et cri90

A4190



Indice de Rendu de Couleur IRC Color Rendering CRI
>90

Temperature de couleur Color CCT
2700K - 3000K - 4000K - 6000K

@4000K - Rendement Luminous Efficacy
160 to 165 lm/w

Puissance & nombre de led Power & number of Led
21 w/m & 160 led/m | 18 w/m & 128 led/m
12 w/m & 80 led/m | 9.6 w/m & 64 led/m


Coupe Cut
50 mm (21w) | 62.5 mm (18w) | 100 mm (12w) | 125 mm (9.6w)

Dimensions Dimensions
5000 x 12 x 2 mm (21w & 18w) | 5000 x 10 x 2 mm (12w & 9.6w)


Température d'utilisation Ambient temp.
- 10°C / + 40°C

Tension d'alimentation Input voltage
24Vdc


21w

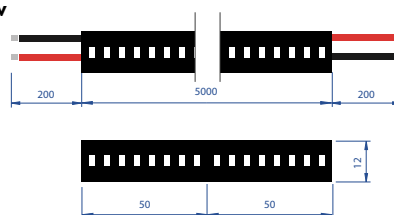


18w

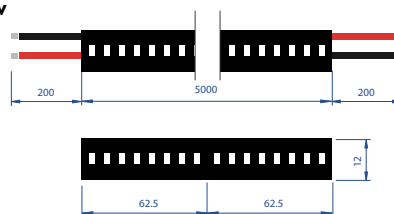

12w

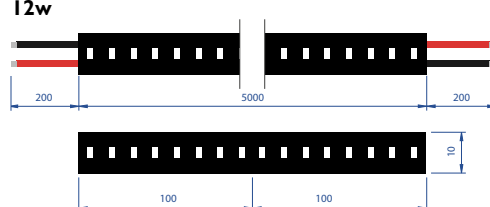

9.6w

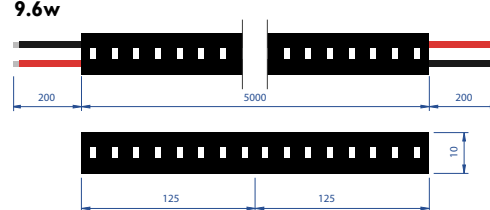

A4190.21.160.927.IP20.DALI

Power & number led/m

21 w/m & 160 led/m (165 lm/w @4000K)	21.160
18 w/m & 128 led/m (165 lm/w @4000K)	18.128
12 w/m & 80 led/m (165 lm/w @4000K)	12.80
9.6 w/m & 64 led/m (167 lm/w @4000K)	09.64

Led Color 21 w/m 18 w/m 12 w/m 9 w/m

2700K	3108 lm	2664 lm	1776 lm	1440 lm	927
3000K	3255 lm	2790 lm	1860 lm	1500 lm	930
4000K	3460 lm	2970 lm	1982 lm	1600 lm	940
6000K	3500 lm	3000 lm	2000 lm	1610 lm	960

IP Rating

IP 20	IP20
IP 54	IP54
IP65H	IP65

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming I to 10VDC	D10
Phase dimming digital	PHA