


ROMULUS

Profile with IP65 diffusor
Profil avec diffuseur IP65

A39105

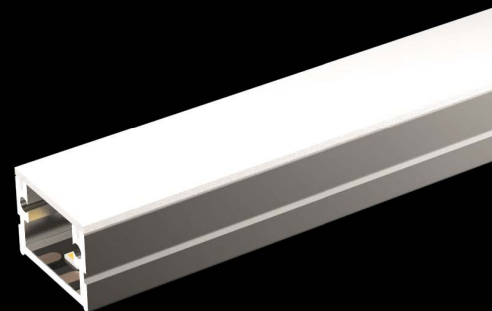


Puissance maxi Power max
30 w/m

Dimensions Dimensions
16 x 12 mm (16 x 14.8 mm with 30° optic)

Longueur maximale Max.length
3000 mm

Fil incandescent Glow wire test
Night&Day 650°C - Opal/Frost/Frost 30° 850°C

Température d'utilisation Ambient temp.
- 10°C / + 40°C



A39105.C9.IP65.00.OP.DALI

Type of led

Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGBW	A4107
RGB2W	A4117
High Efficacy	A4111
Ultra Efficacy	A4116

C99
CR
DW
C9
RGB
RGBW
RGB2W
HE
UE

IP Rating

IP20
IP54
IP65H

IP20
IP54
IP65

Finishes

Aluminium anodised silver
Aluminium anodised black

00
04

Cover & Optic

Opal	PC
Frost	PC
Frost 30°	PC
Night & Day	PC

OP
FR
F30
ND

Dimming

No dimming
Dali
Dmx
Dimming & to 10Vdc
Phase Dimming Digital


HF
DALI
DMX
DI0
PHD



A39105.LP03.3
End cap for 30°




A39105.LP03.2
End cap



A39105.LP10.3
Clips°



A39105.00



A39105.LP140
Clips ressort