

ROMULUS MINI

Profile with IP65 diffusor
Profil avec diffuseur IP65

A39107




Puissance maxi Power max
24 w/m

Dimensions Dimensions
16 x 8.3 mm (16 x 10.8 mm with 30° optic)

Longueur maximale Max.length
3000 mm

Fil incandescent Glow wire test
Night&Day 650°C - Opal Frost 60° 850°C

Température d'utilisation Ambient temp.
- 10°C / + 40°C

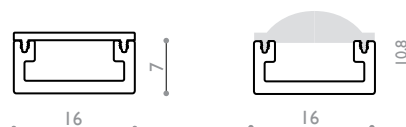

A39107.C9.IP65.00.OP.DALI

Type of led (strip 10mm max)

Pure CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Regular	A4109	C9
RGB	A4106	RGB
RGBW	A4107	RGBW
RGB2W	A4117	RGB2W
High Efficacy	A4111	HE

IP Rating

IP20	IP20
IP54	IP54
IP65H	IP65

Finishes


Aluminium anodised silver	00
Aluminium anodised black	04

Cover & Optic


Opal	PC	OP
Frost	PC	FR
Optic 30°	PC	F30
Night & Day		ND

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc	DI0
Phase Dimming Digital	PHD



A39107.04.ND
Night & Day



A39107.LP10.3
Clips



A39107.LP04.2
Endcap + hole



A39107.OP/FR
Diffusor IP65 opal/fro



A39107.LP03.2
Endcap



A39107.LP03.3
Endcap for optic



A39107.OP/FR
Diffusor IP65 opal/fro