

Microline

Ø14



Body

Surface mounted LED system in extruded aluminium.
Available in different length configurations starting from 35mm with increment of 30mm.
Section diameter 14mm.

Mounting options:
Integrated magnets for easy installation.
L mounting brackets.
U mounting clips.

*** Plastic free packaging.**

Accessories

Mounting accessories included.
Power extension cable Art. 2D58 to be ordered separately.

Finish

Anodized black, white, brass polished, gold or aluminium finish. Other finish options available on request.

LED sources

SMD.
CRI: 93 & 97 | R9: >90 | CCT: 1800K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Extra Wide Beam Angle.
Opal Diffuser (OD).
Lenticular Transparent Diffuser (TD).

Driver

Driver not included to be ordered separately.
Work with 24V Constant Voltage Driver positioned remotely.

Applications

Miniature linear light with a disappearing look delivers an homogenous and diffuse light effect, making it the ideal product for showcase and under cabinet illumination.
Application areas: Retail, cabinet displays, showcases, jewelry displays, residential, restaurants, museums.

Related Products


**Microline
Ø9** 

**Microline
Ø14 Chain** 

**Microline
Spot** 

**Microline
Spot Chain** 

Microline Ø14 | 20W/m | G420

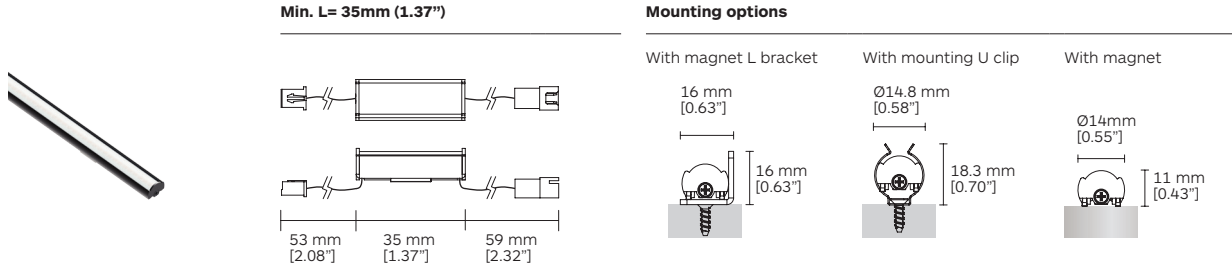

Max. L= 2105mm (82.87") **Increment: 30mm (1.18")**

Available length codes ¹

LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
0.60W	0035	35	1.37	70 lm	15.00W	0755	755	29.72	1750 lm	29.40W	1475	1475	58.07	3430 lm
1.20W	0065	65	2.56	140 lm	15.60W	0785	785	30.91	1820 lm	30.00W	1505	1505	59.25	3500 lm
1.80W	0095	95	3.74	210 lm	16.20W	0815	815	32.09	1890 lm	30.60W	1535	1535	60.43	3570 lm
2.40W	0125	125	4.92	280 lm	16.80W	0845	845	33.27	1960 lm	31.20W	1565	1565	61.61	3640 lm
3.00W	0155	155	6.10	350 lm	17.40W	0875	875	34.45	2030 lm	31.80W	1595	1595	62.80	3710 lm
3.60W	0185	185	7.28	420 lm	18.00W	0905	905	35.63	2100 lm	32.40W	1625	1625	63.98	3780 lm
4.20W	0215	215	8.46	490 lm	18.60W	0935	935	36.81	2170 lm	33.00W	1655	1655	65.16	3850 lm
4.80W	0245	245	9.65	560 lm	19.20W	0965	965	37.99	2240 lm	33.60W	1685	1685	66.34	3920 lm
5.40W	0275	275	10.83	630 lm	19.80W	0995	995	39.17	2310 lm	34.20W	1715	1715	67.52	3990 lm
6.00W	0305	305	12.01	700 lm	20.40W	1025	1025	40.35	2380 lm	34.80W	1745	1745	68.70	4060 lm
6.60W	0335	335	13.19	770 lm	21.00W	1055	1055	41.54	2450 lm	35.40W	1775	1775	69.88	4130 lm
7.20W	0365	365	14.37	840 lm	21.60W	1085	1085	42.72	2520 lm	36.00W	1805	1805	71.06	4200 lm
7.80W	0395	395	15.55	910 lm	22.20W	1115	1115	43.90	2590 lm	36.60W	1835	1835	72.24	4270 lm
8.40W	0425	425	16.73	980 lm	22.80W	1145	1145	45.08	2660 lm	37.20W	1865	1865	73.43	4340 lm
9.00W	0455	455	17.91	1050 lm	23.40W	1175	1175	46.26	2730 lm	37.80W	1895	1895	74.61	4410 lm
9.60W	0485	485	19.09	1120 lm	24.00W	1205	1205	47.44	2800 lm	38.40W	1925	1925	75.79	4480 lm
10.20W	0515	515	20.28	1190 lm	24.60W	1235	1235	48.62	2870 lm	39.00W	1955	1955	76.97	4550 lm
10.80W	0545	545	21.46	1260 lm	25.20W	1265	1265	49.80	2940 lm	39.60W	1985	1985	78.15	4620 lm
11.40W	0575	575	22.64	1330 lm	25.80W	1295	1295	50.98	3010 lm	40.20W	2015	2015	79.33	4690 lm
12.00W	0605	605	23.82	1400 lm	26.40W	1325	1325	52.17	3080 lm	40.80W	2045	2045	80.51	4760 lm
12.60W	0635	635	25.00	1470 lm	27.00W	1355	1355	53.35	3150 lm	41.40W	2075	2075	81.69	4830 lm
13.20W	0665	665	26.18	1540 lm	27.60W	1385	1385	54.53	3220 lm	42.00W	2105	2105	82.87	4900 lm
13.80W	0695	695	27.36	1610 lm	28.20W	1415	1415	55.71	3290 lm					
14.40W	0725	725	28.54	1680 lm	28.80W	1445	1445	56.89	3360 lm					


Code ordering example: **G 4 2 0 0 0 3 5 - 9 7 2 7 O D 0 0 1 0**

	Product code*	Length code***	>CRI	CCT**	LED Power	Nominal Lumen	Diffuser	Light Source Code	Finish
Microline Ø14 20W/m	G420	Min. 0035	97	27 2700K	20W/m	2090 lm/m	OD	00	10 ■ Black
		⋮		30 3000K		2322 lm/m			11 □ White
		Max. 2105		35 3500K		2322 lm/m			28 ■ Brass Polished
		40 4000K		2355 lm/m		35 ■ Gold			
		93 18 1800K		1360 lm/m		1Y			70 ■ Aluminium
		22 2200K		1791 lm/m					
		95 24 2400K		1891 lm/m					

Notes:

¹ Information in the chart above is related to 3000K LED.

Microline Ø14 | 31W/m | G422

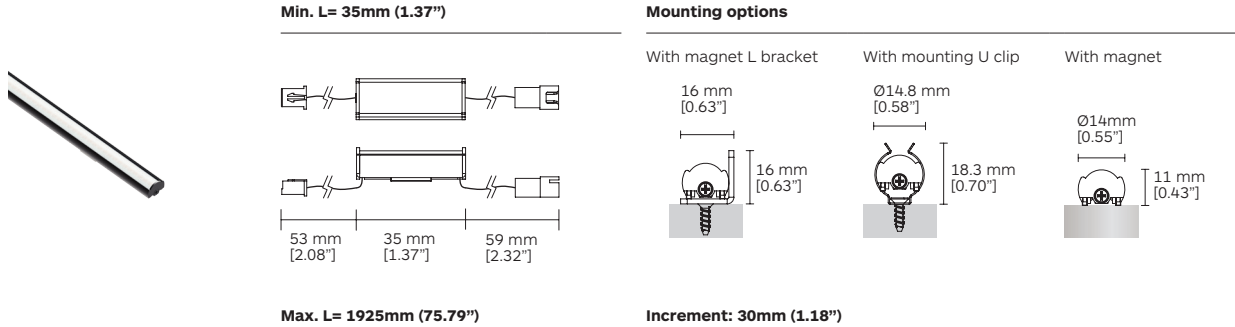

Available length codes ¹

LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
0.93W	0035	35	1.37	97 lm	23.25W	0755	755	29.72	2425 lm	45.57W	1475	1475	58.07	4753 lm
1.86W	0065	65	2.56	194 lm	24.18W	0785	785	30.91	2522 lm	46.50W	1505	1505	59.25	4850 lm
2.79W	0095	95	3.74	291 lm	25.11W	0815	815	32.09	2619 lm	47.43W	1535	1535	60.43	4947 lm
3.72W	0125	125	4.92	388 lm	26.04W	0845	845	33.27	2716 lm	48.36W	1565	1565	61.61	5044 lm
4.65W	0155	155	6.10	485 lm	26.97W	0875	875	34.45	2813 lm	49.29W	1595	1595	62.80	5141 lm
5.58W	0185	185	7.28	582 lm	27.90W	0905	905	35.63	2910 lm	50.22W	1625	1625	63.98	5238 lm
6.51W	0215	215	8.46	679 lm	28.83W	0935	935	36.81	3007 lm	51.15W	1655	1655	65.16	5335 lm
7.44W	0245	245	9.65	776 lm	29.76W	0965	965	37.99	3104 lm	52.08W	1685	1685	66.34	5432 lm
8.37W	0275	275	10.83	873 lm	30.69W	0995	995	39.17	3201 lm	53.01W	1715	1715	67.52	5529 lm
9.30W	0305	305	12.01	970 lm	31.62W	1025	1025	40.35	3298 lm	53.94W	1745	1745	68.70	5626 lm
10.23W	0335	335	13.19	1067 lm	32.55W	1055	1055	41.54	3395 lm	54.87W	1775	1775	69.88	5723 lm
11.16W	0365	365	14.37	1164 lm	33.48W	1085	1085	42.72	3492 lm	55.80W	1805	1805	71.06	5820 lm
12.09W	0395	395	15.55	1261 lm	34.41W	1115	1115	43.90	3589 lm	56.73W	1835	1835	72.24	5917 lm
13.02W	0425	425	16.73	1358 lm	35.34W	1145	1145	45.08	3686 lm	57.66W	1865	1865	73.43	6014 lm
13.95W	0455	455	17.91	1455 lm	36.27W	1175	1175	46.26	3783 lm	58.59W	1895	1895	74.61	6111 lm
14.88W	0485	485	19.09	1552 lm	37.20W	1205	1205	47.44	3880 lm	59.52W	1925	1925	75.79	6208 lm
15.81W	0515	515	20.28	1649 lm	38.13W	1235	1235	48.62	3977 lm					
16.74W	0545	545	21.46	1746 lm	39.06W	1265	1265	49.80	4074 lm					
17.67W	0575	575	22.64	1843 lm	39.99W	1295	1295	50.98	4171 lm					
18.60W	0605	605	23.82	1940 lm	40.92W	1325	1325	52.17	4268 lm					
19.53W	0635	635	25.00	2037 lm	41.85W	1355	1355	53.35	4365 lm					
20.46W	0665	665	26.18	2134 lm	42.78W	1385	1385	54.53	4462 lm					
21.39W	0695	695	27.36	2231 lm	43.71W	1415	1415	55.71	4559 lm					
22.32W	0725	725	28.54	2328 lm	44.64W	1445	1445	56.89	4656 lm					

Code ordering example: **G 4 2 2 0 0 3 5 - 9 7 2 7 O D 0 0 1 0**

	Product code*	Length code***	>CRI	CCT**	LED Power	Nominal Lumen	Diffuser	Light Source Code	Finish
Microline Ø14 31W/m	G422	Min. 0035	97	27 2700K	31W/m	3051 lm/m	OD	00	10 ■ Black
		⋮		30 3000K		3217 lm/m			11 □ White
		Max. 1925		35 3500K		3284 lm/m			28 ■ Brass Polished
				40 4000K		3416 lm/m			35 ■ Gold
								70 ■ Aluminium	


Notes:

¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Voltage

Microline Ø14

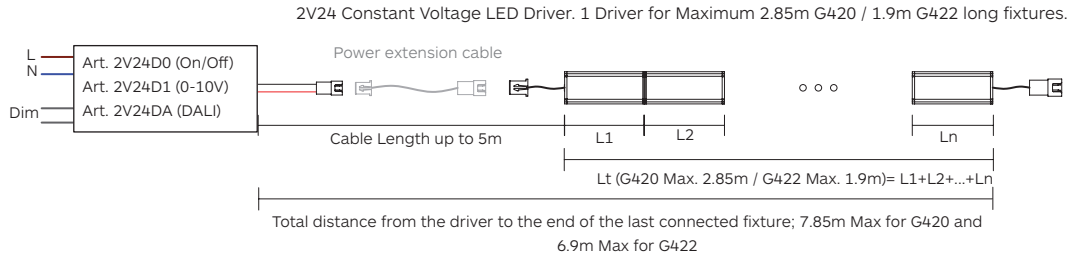

G420 / G422

Power extension cable. Art. **2D58**. 1m (if necessary).

Vin= 90~305V AC 50/60Hz
 Vout= 24VDC 2.5A 60W Max.
 Dimensions: 150x53x35mm.
 IP20