


Cobra Linealuce

Designed by Ponctuelle

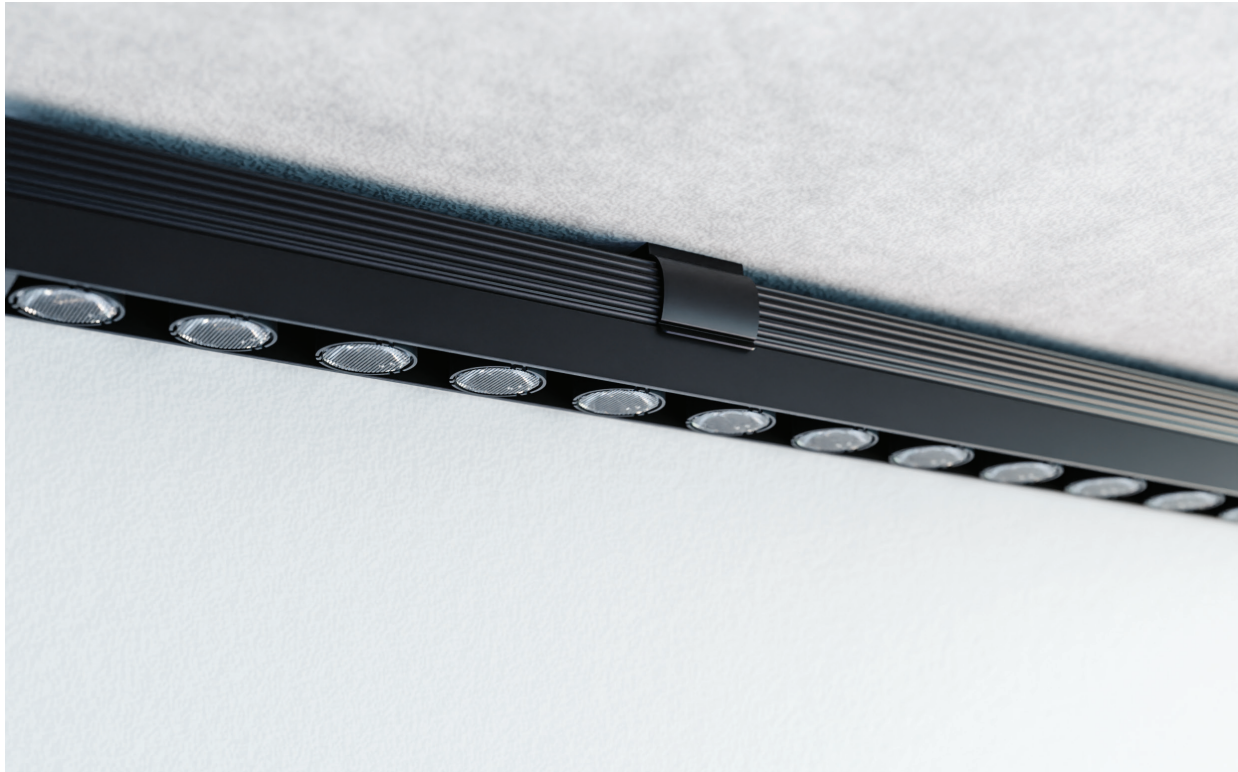

Body

Surface mounted LED system in extruded aluminium.
Available in different length configurations starting from 120mm with increment of 120mm.
Section 28.5x30mm.
Constant 30mm pitch between the LED.

Mounting options:
U mounting clips.

*** Plastic free packaging.**

Accessories

Honeycomb Art. 2D88.
Color filter Art. 2E40.
Mounting accessories included.
Power extension cable Art. 2C47 to be ordered separately.

Finish

Anodized black, white, brass polished or gold finish.
Other finish options available on request.

LED sources

Power LED.
CRI: 75 & 90 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Lens.
Beam angle: 10° / 17° / 29° / elliptical (15° x 50°).
Wallwasher optics.

Driver

Driver not included to be ordered separately.
Work with 1050 mA Constant Current Driver positioned remotely.

Applications

Ideal for indirect cove illumination, it creates a wall grazing effect for columns and curved architectural surfaces.
The constant pitch between its LED, insures a continuous illumination without any shadows or dark areas.
Application areas: Cove light, wallwash, residential, hospitality, restaurants, museums.

Related Products

Cobra Flex



Cobra Flex Chain



Cobra Linealuce Louvre



Cobra Flex Louvre



Cobra Flex Chain Louvre



Cobra Pro IP66




Cobra Linealuce Louvre | G450

Cobra
Linealuce
Louvre




Min. L= 120mm (4 x LED)



Mounting options

With mounting U clip



Max. L= 960 mm (32 x LED)



Notes:


¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Current

Cobra Linealuce Louvre

2C02 Constant Current LED Driver. 1 Driver can drive 4-32LEDs, about 960mm Max.

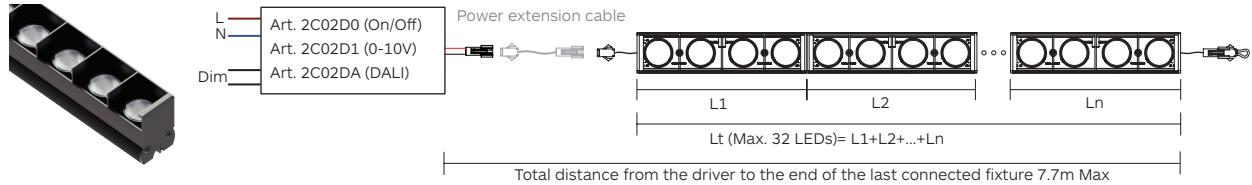

G450

Power extension cable. Art. **2C47**. 1m (if necessary).

Vin= 180-277V AC 50/60Hz
Iout= 1050mA V=2-57V
P= 60W Max.
Dimensions: 123.5x81.5x23mm
IP20