


Cobra Flex Chain

Adjustable in 3 directions

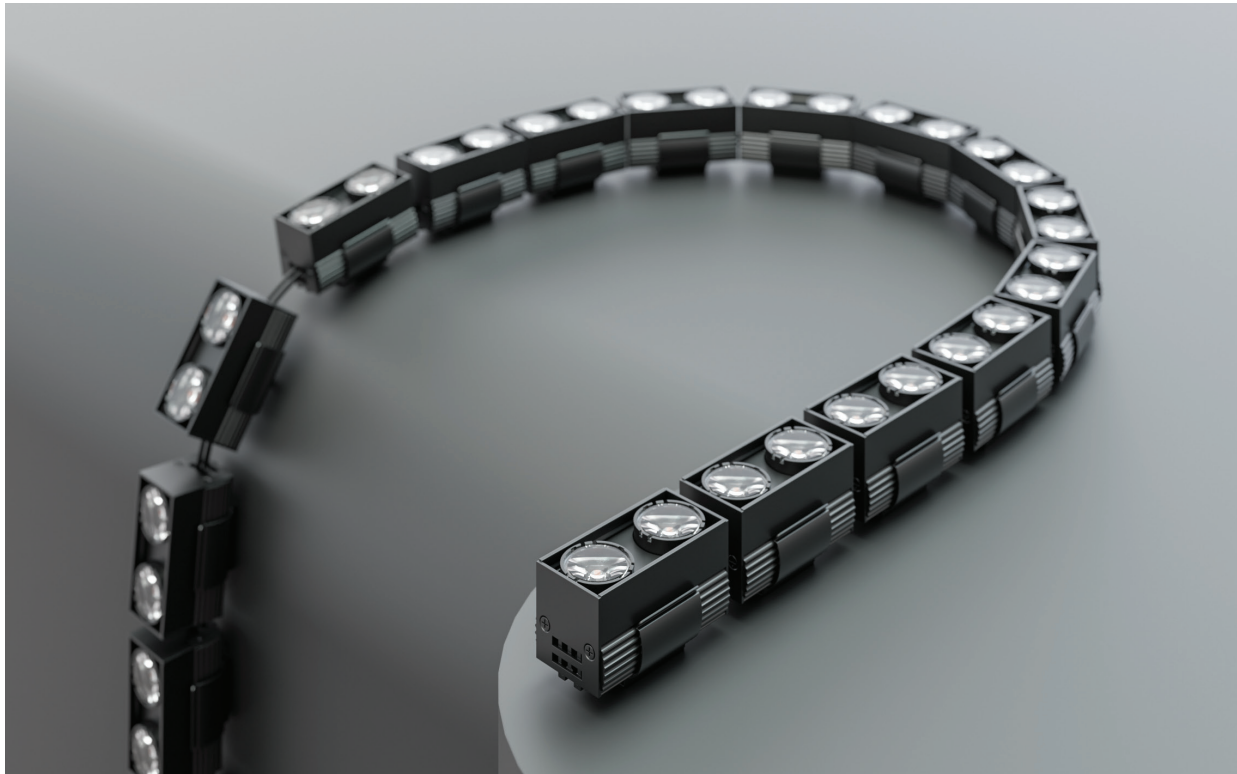

Body

Surface mounted modular system in extruded aluminium, LED links connected by a steel wire enabling adjustment of each individual LED link in 3 directions.

Available in different length configurations based on a 54mm link (2 LED per link) with a 64mm increment. Section 28.5 x 30mm. Its flexible structure maintain a constant 30mm pitch between the LED.

Mounting options:
U mounting clips.

*** Plastic free packaging.**

Accessories

Honeycomb Art. 2D88.
Color filter Art. 2E40.
Mounting accessories included.
Power extension cable Art. 2C47 to be ordered separately.

Finish

Anodized black, white, brass polished or gold finish.
Other finish options available on request.

LED sources

Power LED.
CRI: 75 & 90 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Lens.
Beam angle: 10° / 17° / 29° / elliptical (15° x 50°).
Wallwasher optics.

Driver

Driver not included to be ordered separately.
Work with 1050 mA Constant Current Driver positioned remotely.

Applications

Ideal for indirect cove illumination, it creates a wall grazing effect for columns and curved architectonic surfaces. Its flexible structure maintain a constant pitch between LED, insuring a continuous illumination without any shadows or dark areas. Application areas: Cove light, wallwash, residential, hospitality, restaurants, museums.

Related Products

Cobra Linealuce 

Cobra Flex 

Cobra Linealuce Louvre 

Cobra Flex Louvre 

Cobra Flex Chain Louvre 

Cobra Pro IP66 




Cobra Flex Chain | G472

Cobra
Flex Chain




Min. L= 54mm (2 x LED) 1 Link




Mounting options

With mounting U clip




Accessories

Honeycomb Art. 2D88



Adjustable

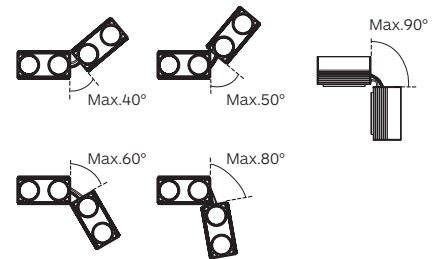

Max. L= 1014mm (32 x LED) 16 Links



☐

Notes:


¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Current

Cobra Flex Chain

2C02 Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 954mm Max.

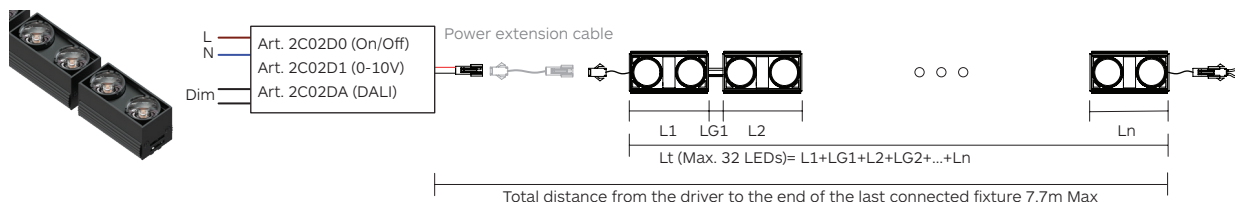


G472

Power extension cable. Art. **2C47**. 1m (if necessary).

Vin= 180-277V AC 50/60Hz
 Iout= 1050mA V=2~57V
 P= 60W Max.
 Dimensions: 123.5x81.5x23mm
 IP20

Accessories

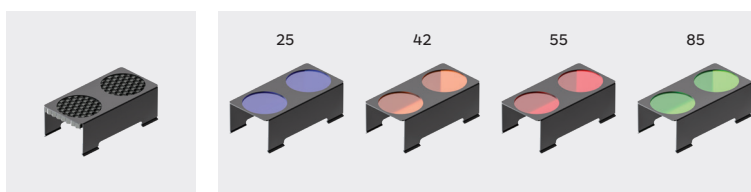

Product / Accessories

Honeycomb

Coloured Filters

Finish: 10

Filter colour codes: 25 / 42 / 55 / 85

Cobra Flex Chain

2D88

2E40-25
2E40-42
2E40-55
2E40-85

* Please refer to the user manuals for further details.