


NEKO / AFTER7 Mini
Projector Light



5.5W | CRI80 | 3000K | 30°/45° | IP68 | IK10 | CITIZEN 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey

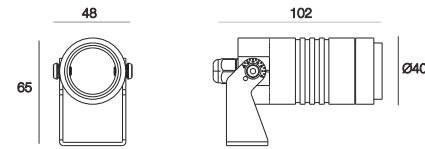

Cable in 3 meters



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006-DN
					45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°-H	AFMI-8303006-DN-H
					45°	500lm	AFTER7 Mini-830-45°-H	AFMI-8304506-DN-H


Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Stake for AFTER7 series projectors




Light Distribution

3000K

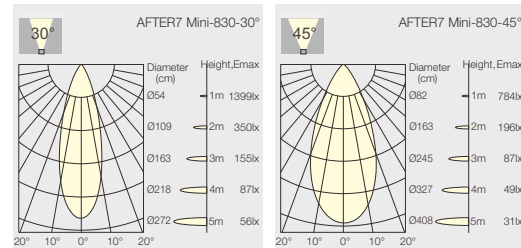

NEKO / AFTER7 Maxi
Projector Light

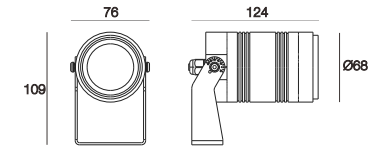

10W | CRI80 | 3000K | 20°/30°/50° | IP68 | IK10 | CITIZEN 50,000h@L80B10 | CE | Body: Aluminum Color: Dark-Grey



Cable in 3 meters



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010-DN
					30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010-DN
					50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°-H	AFMA-8302010-DN-H
					30°	850lm	AFTER7 Maxi-830-30°-H	AFMA-8303010-DN-H
					50°	850lm	AFTER7 Maxi-830-50°-H	AFMA-8305010-DN-H

Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Stake for AFTER7 series projectors



Light Distribution

3000K

