




PHOS
ENGINEERING LIGHT

MAXI EYECONIC NEMO MINI TRIM FIXED

PART L TECHNOLOGY




11W

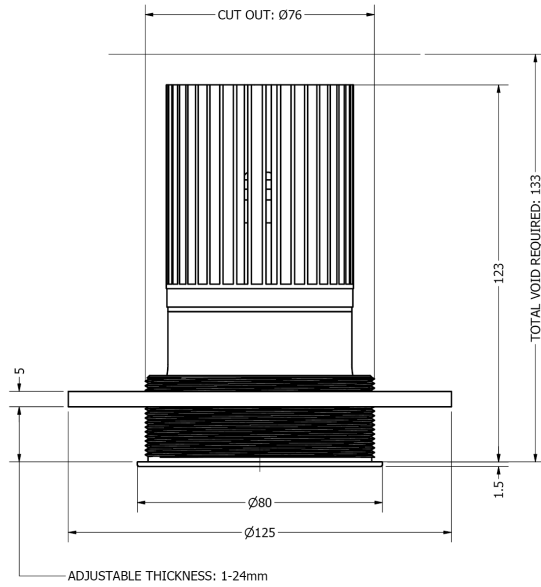


TECHNICAL SPECIFICATIONS

CCT	2700K			
Wattage	11W			
BeamAngle	20°	25°	30°	45°
Luminaire Lumens (lm)	1518	1550	1360	1471
Circuit Watts (c/W)	13.7	13.7	13.7	13.7
LuminaireEfficacy (l/cW)	111	114	99	108
Luminance (Cd)	9514	5617	3134	2118
Light Source (Lm/W)	180	180	180	180
Engine (Lm/W)	140	140	140	140
Forward Volatage (Vf)	31.6	31.6	31.6	31.6
Current (mA)	350	350	350	350
CCT	3000K			
Wattage	11W			
BeamAngle	20°	25°	30°	45°
Luminaire Lumens (lm)	1545	1496	1360	1472
Circuit Watts (c/W)	12.4	12.5	12.5	12.4
LuminaireEfficacy (l/cW)	125	120	109	119
Luminance (Cd)	10047	6038	3172	2235
Light Source (Lm/W)	178	178	178	178
Engine (Lm/W)	126	126	126	126
Forward Volatage (Vf)	31.6	31.6	31.6	31.6
Current (mA)	350	350	350	350
Binning	2 step MacAdams			
CRI	80+			
TM-30-15	Rf91.7 - Rg99.2			
Lumen Maintenance	LM80			
Lifetime	50,000 hours			
Dimming				

LIGHT CONES

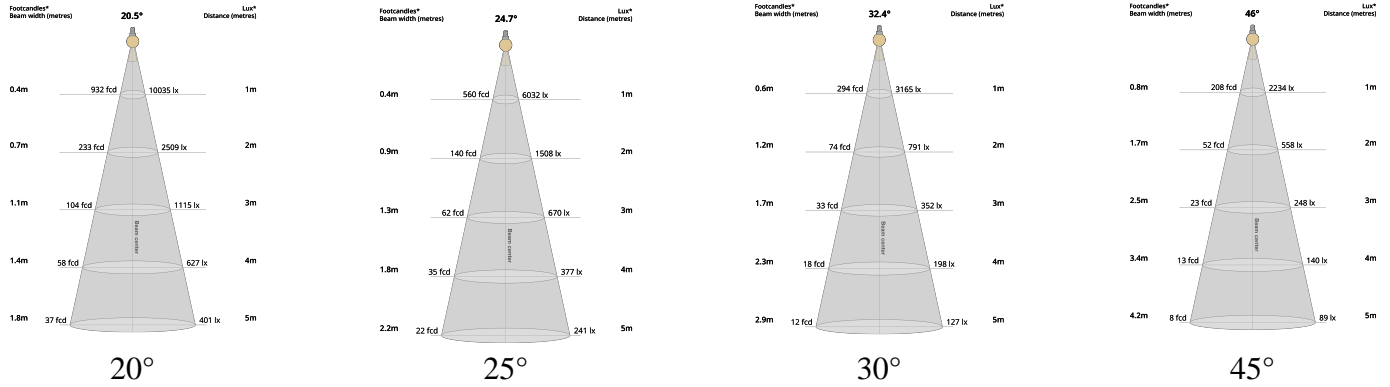

POLAR CURVES

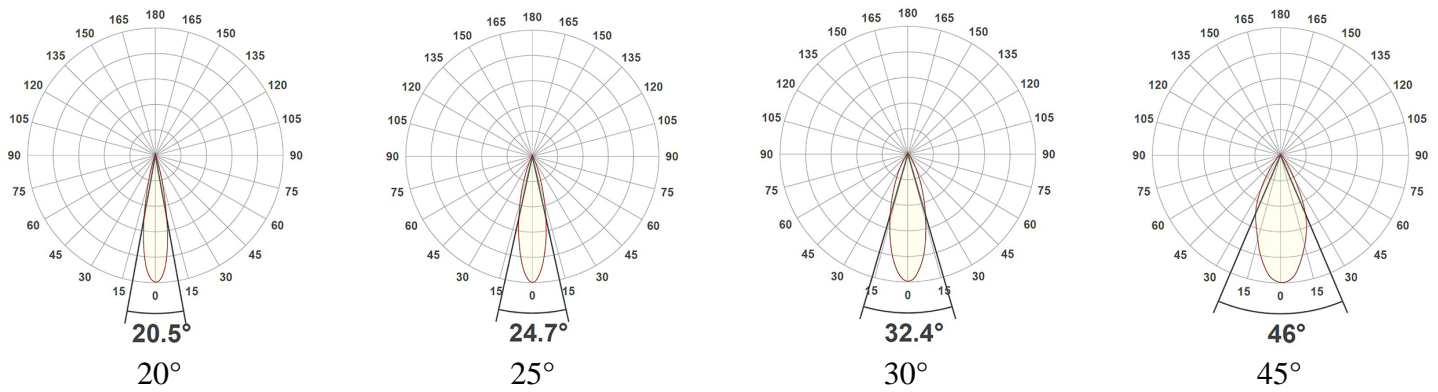

PART CODE BUILDER

Example Code: MX-EY-TF-WT/WT-PLT11-27-80-20-350

Family	Variant	Frame Finish	InnerBaffle Finish	Engine	Power	CCT	CRI	Beam Angle	Driver Current
MX	EY-TF	WT	WT	PLT	11W	27K	80	20°	350mA
		BT	BT			30K		25°	
		*C	*C					30°	
								45°	

Frame Example : MX-FR-NM-MT-WT

Variant	Frame Finish
MX-FR-NM-MT	WT
	B2

REGENERATION FOR GENERATIONS



View ReGen Doc



TAKE
Sourcing material locally



MAKE
Responsible manufacture



WASTE
Lifetime duty of care




EYECONIC & ECLIPSE TM66 RESULTS

Category	Points Scored	MAX Possible Points	Assessment
Product Design	111.0	134.0	3.3
Manufacturing	35.0	46.5	3.0
Materials	11.0	24.0	1.8
Ecosystem	36.0	43.0	2.2
Overall Performance	193.0	247.5	2.9
2.5 to 4.0	Excellent circularity		

TM65 Available upon request

Embodied carbon in building services


WE ENCOURAGE ALL FIXTURES TO BE RETURNED TO US SO WE CAN REGEN OR RECYCLE.



If a product has failed or has become EOL, we can arrange collection of the interchangeable light engines and associated drivers. Once received, we will review the engine to see if it can be **ReGenerated** or **recycled**.



If we can **ReGenerate** the light engine, we will only need to replace the faulty part of the fitting, which can then be restored to life, utilising all of our original optics and bezels.



If the unit is beyond the point of repair, we will ensure the raw material is always fully recycled. We encourage all fixtures to be returned to us so we can **ReGen** or **recycle**.

ACCESSORIES



Maxi Commissioning Tool

ACCS-TOOL-MAXI



Maxi Snoot
Adjustable ONLY


ACCS-MX-SNOOT



Maxi Trimless Bung
Trimless ONLY

ACCS-MX-EY-BUNG

INSERTS



Elliptical Insert

ACCS-MX-EL




Asymmetric Insert

ACCS-MX-AS




Softening Insert

ACCS-MX-SL



Honey Comb Insert

ACCS-MX-HC




Colour Change Insert

ACCS-MX-FILTER18K
ACCS-MX-FILTER22K
ACCS-MX-FILTER24K
ACCS-MX-FILTER25K


FINISHES

Every element of your light can be finished in any of the options below, or RAL colour:


PLATED (Interior ONLY)

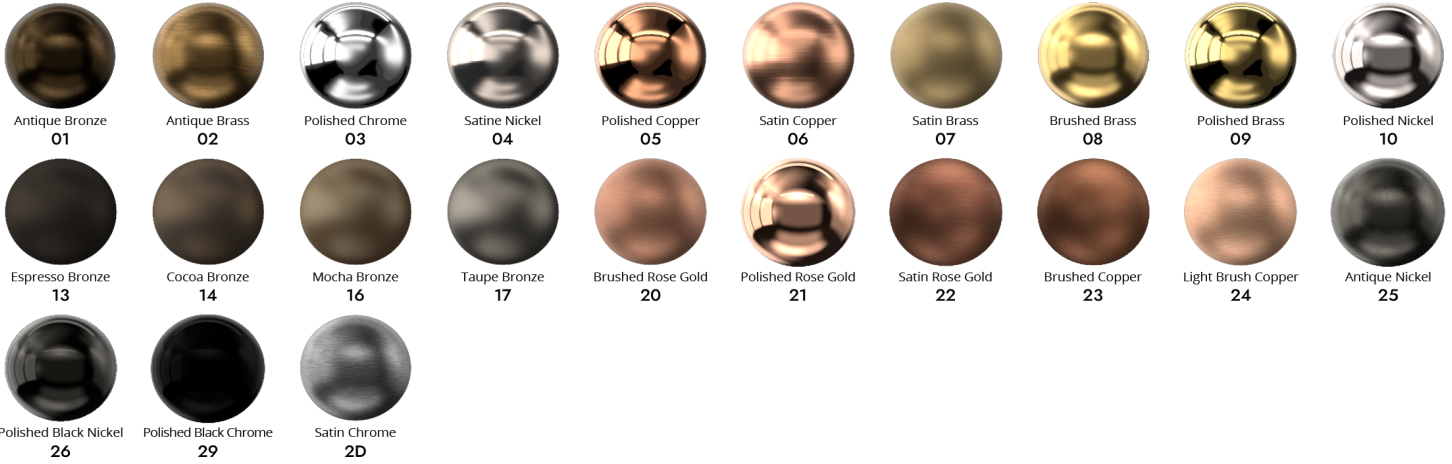

ANODISED (Interior ONLY)

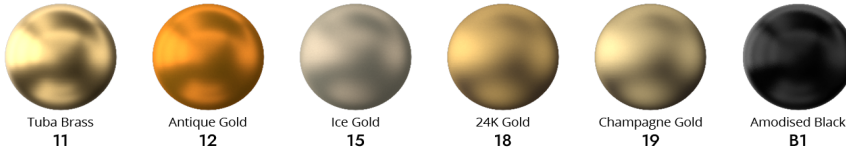


SPECIALITY PLATED (Interior ONLY)




POWDER COAT (Interior & Exterior)



METAL POWDER COAT (Interior & Exterior)

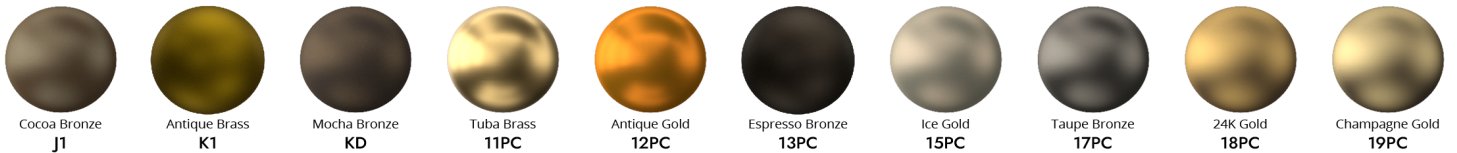

MARINE GRADE (Interior, Exterior & Harsh Environment)

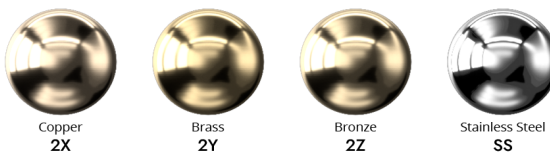

SPECIALITY POWDER COAT (Interior & Exterior)

