


SNAKE

Angle bendable ledstrip for custom shape lighting applications
Ruban led à courber dans différentes directions
A4105

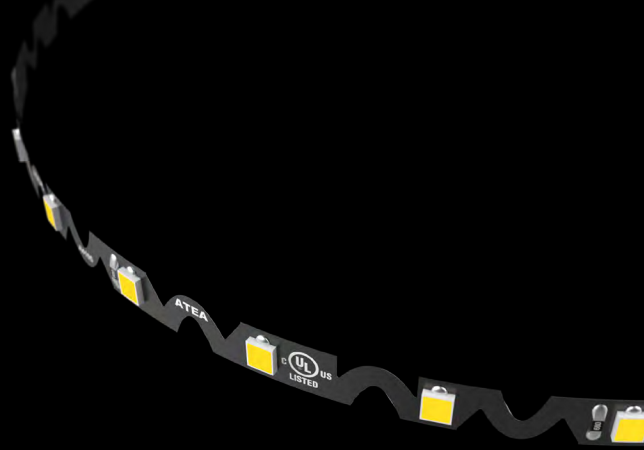

Temperature de couleur CCT

1800K - 2200K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K

Precision de couleur & IRC Color consistency & CRI

OneBinOnly | 97

Rendement lumineux Luminous Efficacy (@4000K)

70 lm/w (@12w/m) - 81 lm/w (@4.8w/m)

Puissance & nombre de led Power & number of Led

4,8 w/m | 12 w/m & 60 leds/m

Coupe Cutting unit

100 mm

Dimensions Dimensions

5000 x 6 x 1.2 mm

Tension d'alimentation & Classe isolation Input voltage & Class

24Vdc | class III


Température d'utilisation Ambient temperature

- 20°C / + 40°C

4.8 / 12 w



Cutting unit



A4105.5.60.924.IP20.DALI

Power & number leds/m

4.8 w/m & 60 leds/m

12 w/m & 60 leds/m

CCT & luminous flux/m

	4.8w/m	12w/m	
1800K	250 lm	700 lm	918
2200K	270 lm	700 lm	922
2400K	300 lm	720 lm	924
2700K	360 lm	780 lm	927
3000K	360 lm	780 lm	930
3500K	360 lm	800 lm	935
4000K	390 lm	840 lm	940
5000K	390 lm	840 lm	950
6000K	400 lm	890 lm	960

IP Rating

IP20

IP54

Dimming

No dimming

Dali

Dmx

Dimming 0/1-10V

Casambi

IP20

IP54

HF

DALI

DMX

D10

CSB