


ULTRACRI COB

Uniform lighting strip without dot
Ruban avec lumière continue sans points

A4130

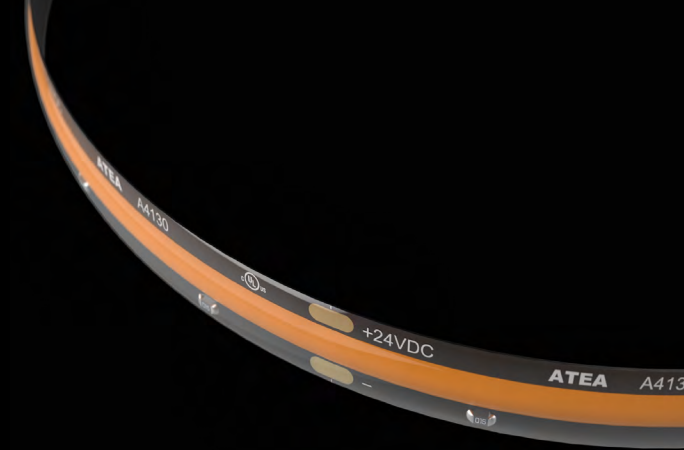

Temperature de couleur CCT

1800K - 2000K - 2200K - 2400K - 2700K
3000K - 3500K - 4 000K - 5000K - 6000K - 6500K

Precision de couleur & IRC Color consistency & CRI

OneBinOnly | >94 | >97 for 2400K, 2700K, 3000K, 3500K

Rendement lumineux Luminous Efficacy (@4000K)

90 lm/w

Puissance & nombre de led Power & number of Led

8w/m | 10w/m | 15w/m & 480 chips/m

Coupe Cutting unit

50 mm

Dimensions Dimensions




5000 x 4 x 1,5 mm | 8 x 2 mm | 10 x 2 mm

Tension d'alimentation & Classe isolation Input voltage & Class

24 Vdc | class III

Température d'utilisation Ambient temperature

- 5°C / + 40°C

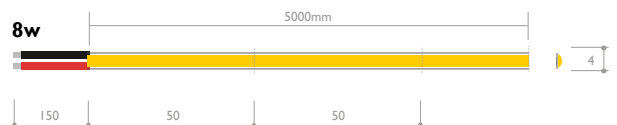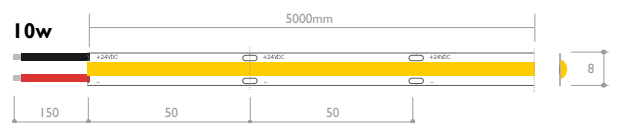

A4130.8.480.930.IP20.DALI

Power & number leds/m

15 w/m & 480 chips/m	15.480
10 w/m & 480 chips/m	10.480
8 w/m & 480 chips/m	8.480

CCT & luminous flux/m

	8w/m	10w/m	15w/m	
1800K	530 lm	660 lm	990 lm	918
2000K	540 lm	670 lm	1005 lm	920
2200K	580 lm	720 lm	1060 lm	922
2400K	590 lm	735 lm	1080 lm	924
2700K	610 lm	760 lm	1120 lm	927
3000K	640 lm	800 lm	1180 lm	930
3500K	685 lm	860 lm	1280 lm	935
4000K	710 lm	880 lm	1350 lm	940
5000K	715 lm	905 lm	1360 lm	950
6000K	715 lm	910 lm	1360 lm	960
6500K	720 lm	915 lm	1370 lm	965

IP Rating

IP20	IP20
IP54 (Wet indoor)	IP54
IP65H (Semi Outdoor)	IP67H

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming 0/1-10V	D10
Casambi	CSB