

PURE CRI99

Ultimate performance ledstrip CRI99
Ruban très haute performance IRC99
A4199



Temperature de couleur CCT
2200K - 2700K - 3000K - 4000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | 99(+/-1) - R9>95

Rendement lumineux Luminous Efficacy (@4000K)
> 88 lm/w

Puissance & nombre de led Power & number of Led
13 w/m | 26 w/m & 140 leds/m

Coupe Cutting unit
50 mm


Dimensions Dimensions
5000 x 10 x 1.4 mm

Tension d'alimentation & Classe isolation Input voltage & Class
24Vdc | class III





Température d'utilisation Ambient temp.
- 10°C / + 40°C



13/26w



Cutting unit

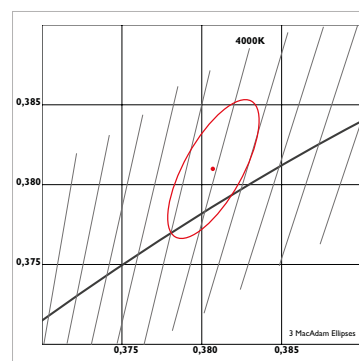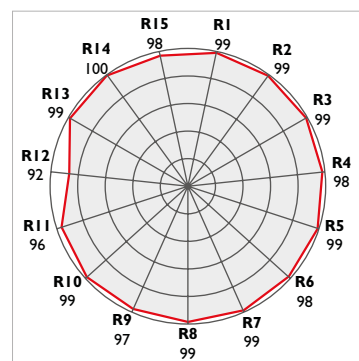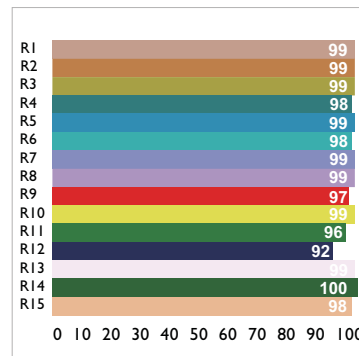

Power & number leds/m

26 w/m & 140 leds/m

13 w/m & 140 leds/m

(custom power/m & leds/m on request)

CCT & luminous flux/m

	13w/m	26w/m	
2200K	930 lm	1700 lm	922
2700K	1020 lm	1860 lm	927
3000K	1080 lm	1950 lm	930
4000K	1140 lm	2070 lm	940

IP Rating

IP20

IP54 (Wet indoor)

IP65H (Semi outdoor)

Pour des IP supérieur, veuillez nous consulter

For higher IP ratings, please contact us.

Dimming

No dimming

Dali

Dmx

Dimming 0/1-10V

Casambi

A4199.26.140.940.IP20.DALI

26.140

13.140

IP20

IP54

IP65H

HF

DALI

DMX

D10

CSB