

SLIM 5 ULTRA EFFICIENCY 96

5mm Slim strip Ultra Efficiency CRI 96
Ruban Ultra Efficiency 5mm IRC 96

A4115



Temperature de couleur CCT

1800K - 2100K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K - 6500K

Precision de couleur & IRC Color consistency & CRI

OneBinOnly | >96

Rendement lumineux Luminous Efficacy (@4000K)

169 lm/w

Puissance & nombre de led Power & number of Led

14.4 w/m & 208 leds/m

Coupe Cutting unit

38.46 mm

Dimensions Dimensions

2500 x 5 x 1.8 mm


Tension d'alimentation & Classe isolation Input voltage & Class

24Vdc | class III

Température d'utilisation Ambient temperature

- 10°C / + 40°C

14.4w

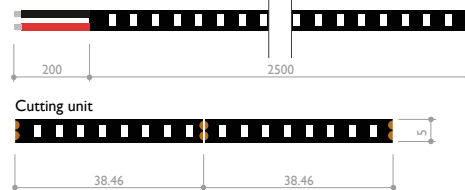

A4115.15.208.930.IP20.DALI

Power & number leds/m

14.4 w/m & 208 leds/m

Custom power on request

CCT & luminous flux/m

	14.4w/m
1800K	1950 lm
2100K	2000 lm
2400K	2075 lm
2700K	2000 lm
3000K	2320 lm
3500K	2320 lm
4000K	2440 lm
5000K	2370 lm
6000K	2370 lm
6500K	2320 lm

IP Rating

IP20

IP54

Pour des IP supérieur, veuillez nous consulter
For higher IP ratings, please contact us.

Dimming

No dimming

Dali

Dmx

Dimming 0/1-10V

Casambi

15.208

918

921

924

927

930

935

940

950

960

965

IP20

IP54

HF

DALI

DMX

D10

CSB