



DRAGO Wood 8 LED

LB6048.910-EN-WO

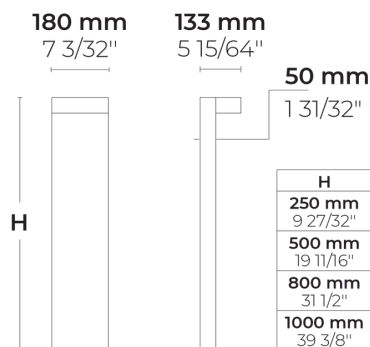

IK08 IP65

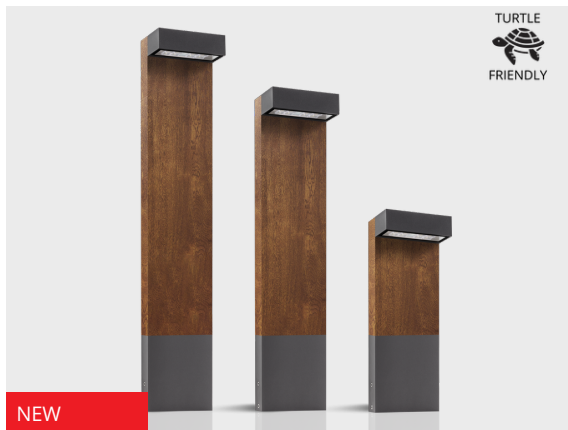

[T3-FG]

Type III, Asymmetric,
Side throw - Frosted
Glass - 132x64°



[T3]

Type III, Asymmetric,
Side throw - 150x60°

Light distribution

Luminaire luminous flux

[T3-FG] 132x64°, [T3] 150x60°

642 - 1779 lm

Rated input power

10 - 20 W

CCT

2700K, 3000K, 4000K

CRI

Ra80

Control

On/Off, DALI

Product colours



Height

25cm, 50cm, 80cm, 1m, Custom height
(Please specify)

Luminaire efficacy

59 - 100 lm/W

Colour deviation

3 SDCM

Lifetime L90B50 (hour)

>102, 000

Housing

Marine grade aluminum housing

Driver

Integral LED driver

Input voltage

220-240V 50/60Hz

For specifications with Turtle Friendly options and photometry files, please contact the factory. For Wood-Look options, only the body part will be covered as the chosen texture. The head will be painted with HM2 standard colour.

Notes

Extras

Consult the factory

120-277V 50/60Hz

Luminaire body options

Double powder coating

Technical details

Certificates

CE, UKCA, Turtle Friendly

Mounting

Surface mountable

Finishing

Chromate conversion pretreatment
followed by electrostatic powder coating
Stainless steel (AISI 304 / EN 1.4301 grade)

Fasteners

Liquid silicone

Gasket

PMMA lens with high optical efficiency

Lens / Reflector

Tempered safety glass

Glass / Diffuser

Impact protection

IK08

Ingress protection

IP65

Insulation class

Class I

Weight

3.53 kg (0.25 m), 4.5 kg (0.8 m)

LED module

High power LEDs on metal-core PCB

Driver surge protection

1/1 kV

Power factor

> 0.90

Through wiring

Single cable entry

Operating temperature

-40...50°C

Cable

0.2 m of flexible cable

Packing box dimensions

15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de


We reserve the right to change specifications without prior written notice. Edition: 24.10.2025. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LB6048.910-EN-WO-__-__-__-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64° [T3] Type III, Asymmetric, Side throw - 150x60°	[350] 10 W [700] 20 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[WLAS]  Wood-Look: Alpine Spruce [WLBf]  Wood-Look: Brown Fir [WLRM]  Wood-Look: Red Mahogany [WLSO]  Wood-Look: Sienna Oak
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H00.25] 25cm [H00.50] 50cm [H00.80] 80cm [H01] 1m [HC] Custom height (Please specify)	Consult the factory	Anchorage		
	[UNI] 120-277V 50/60Hz	[628I000] 628I000		
	Luminaire body options			
	[DPC] Double powder coating			

Accessories (To be ordered separately)

Anchorage



628I000

628I000

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB6048.910-EN-WO-T3-FG-350-827	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	642 lm	10 W	2700 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-350-827	[T3] Type III, Asymmetric, Side throw - 150x60°	816 lm	10 W	2700 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-350-830	[T3] Type III, Asymmetric, Side throw - 150x60°	933 lm	10 W	3000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-FG-350-830	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	733 lm	10 W	3000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-350-840	[T3] Type III, Asymmetric, Side throw - 150x60°	991 lm	10 W	4000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-FG-350-840	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	779 lm	10 W	4000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-700-827	[T3] Type III, Asymmetric, Side throw - 150x60°	1465 lm	20 W	2700 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-FG-700-827	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	1181 lm	20 W	2700 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-700-830	[T3] Type III, Asymmetric, Side throw - 150x60°	1674 lm	20 W	3000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-FG-700-830	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	1350 lm	20 W	3000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-700-840	[T3] Type III, Asymmetric, Side throw - 150x60°	1779 lm	20 W	4000 K	Ra80	On/Off, DALI	
LB6048.910-EN-WO-T3-FG-700-840	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	1434 lm	20 W	4000 K	Ra80	On/Off, DALI	