
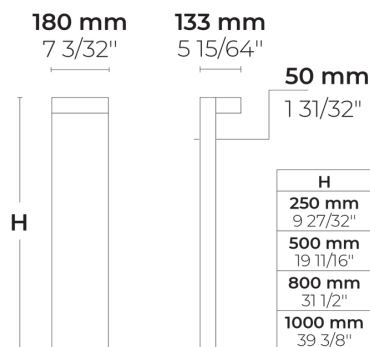


DRAGO Wood Forward

LB6048.575-EN-WO

CE UKCA IK08 IP65

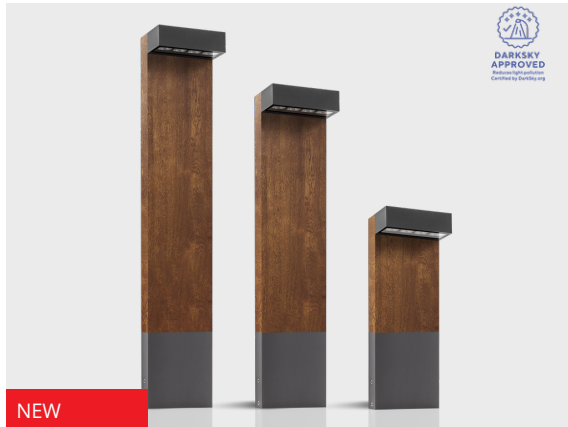

[SLF]
Special linear,
Forward throw -
65x70°

[SLF-FG]
Special linear,
Forward throw -
Frosted Glass -
110x75°

Light distribution	[SLF] 65x70°, [SLF-FG] 110x75°
Luminaire luminous flux	774 - 1646 lm
Rated input power	10 - 20 W
CCT	2700K, 3000K, 4000K
CRI	Ra80
Control	On/Off, DALI
Product colours	
Height	25cm, 50cm, 80cm, 1m, Custom height (Please specify)
Luminaire efficacy	70 - 93 lm/W
Colour deviation	3 SDCM
Lifetime L90B50 (hour)	>42, 000
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz

Notes

3000K CCT or warmer must be selected to be DarkSky International certified., For Wood-Look options, only the body part will be covered as the chosen texture. The head will be painted with HM2 standard colour.

Extras

Connectivity	Motion sensor
Consult the factory	Emergency kit, 120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical details





Certificates	DarkSky Approved, CE, UKCA
Mounting	Surface mountable
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	3.53 kg (0.25 m), 4.5 kg (0.8 m)
LED module	High power LEDs on metal-core PCB
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de


We reserve the right to change specifications without prior written notice. Edition: 24.10.2025. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LB6048.575-EN-WO- - - - -EN-C1- - - - -					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLF] Special linear, Forward throw - 65x70° [SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	[350] 10 W [700] 20 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[WLAS]  Wood-Look: Alpine Spruce [WLBf]  Wood-Look: Brown Fir [WLRM]  Wood-Look: Red Mahogany [WLSO]  Wood-Look: Sienna Oak
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H00.25] 25cm [H00.50] 50cm [H00.80] 80cm [H01] 1m [HC] Custom height (Please specify)	Connectivity	Anchorage		
	[MS] Motion sensor	[628I000] 628I000		
	Consult the factory			
	[EK] Emergency kit			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			

Accessories (To be ordered separately)

Anchorage



628I000

628I000

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB6048.575-EN-WO-SLF-350-827	[SLF] Special linear, Forward throw - 65x70°	849 lm	10 W	2700 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-FG-350-827	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	774 lm	10 W	2700 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-FG-350-830	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	804 lm	10 W	3000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-350-830	[SLF] Special linear, Forward throw - 65x70°	881 lm	10 W	3000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-FG-350-840	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	848 lm	10 W	4000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-350-840	[SLF] Special linear, Forward throw - 65x70°	929 lm	10 W	4000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-FG-700-827	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	1397 lm	20 W	2700 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-700-827	[SLF] Special linear, Forward throw - 65x70°	1506 lm	20 W	2700 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-FG-700-830	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	1454 lm	20 W	3000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-700-830	[SLF] Special linear, Forward throw - 65x70°	1568 lm	20 W	3000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-FG-700-840	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	1527 lm	20 W	4000 K	Ra80	On/Off, DALI	
LB6048.575-EN-WO-SLF-700-840	[SLF] Special linear, Forward throw - 65x70°	1646 lm	20 W	4000 K	Ra80	On/Off, DALI	