



# CORVUS L

LB6075.556-EN

CE UKCA IK08 IP65 

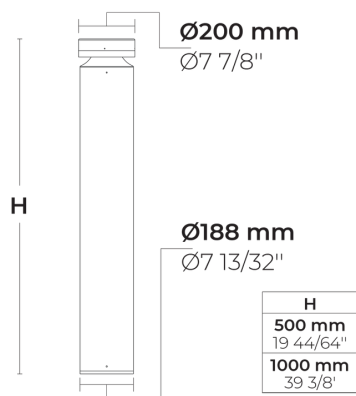

[SYM]  
Symmetric - 139°

<b>Light distribution</b>	[SYM] 139°
<b>Luminaire luminous flux</b>	1011 - 1067 lm
<b>Rated input power</b>	27 W
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	Ra80
<b>Control</b>	On/Off, DALI
<b>Product colours</b>	
<b>Height</b>	50cm, 1m, Custom height (Please specify)
<b>Luminaire efficacy</b>	37 - 40 lm/W
<b>Colour deviation</b>	3 SDCM
<b>Lifetime L90B50 (hour)</b>	>102 000
<b>Housing</b>	Marine grade aluminum housing
<b>Driver</b>	Integral LED driver
<b>Input voltage</b>	220-240V 50/60Hz
<b>Notes</b>	For specifications with Turtle Friendly options and photometry files, please contact the factory.

## Extras

<b>Light output</b>	Constant light output
<b>Consult the factory</b>	120-277V 50/60Hz
<b>Luminaire body options</b>	Double powder coating

## Technical details

<b>Certificates</b>	CE, UKCA, Turtle Friendly
<b>Mounting</b>	Surface mountable
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Insulation class</b>	Class I
<b>Weight</b>	10 kg(1m) , 6.8 kg(0.5m)
<b>LED module</b>	Mid power LEDs on metal-core PCB
<b>Driver surge protection</b>	3/3 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.5 m of flexible cable








HEPER HQ - HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2,  
Malıköy, Temelli, Sincan, 06909  
Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 2372 568 7570  
infoEU@hepergroup.com  
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 21.08.2025. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.

<b>Project name</b>		<b>Type</b>		<b>Quantity</b>	
<b>Date</b>		<b>Note</b>			


LB6075.556-EN-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-EN-C1-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 139°	[700] 27 W	[827] 2700 K CRI 80  [830] 3000 K CRI 80  [840] 4000 K CRI 80	[ONOFF] On/Off  [DALI] DALI	[HM1]  Black  [HM2]  Dark grey  [HM3]  Anthracite grey  [HM4]  Light grey  [HM5]  White  [HM6]  Bronze  [CC]  Custom colour (Please specify RAL code)
<b>Height</b>	<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>		
[H00.50] 50cm	<b>Light output</b>	<b>Anchorage</b>		
[H01] 1m	[CLO] Constant light output	[623]015 623]015		
[HC] Custom height (Please specify)	<b>Consult the factory</b>			
	[UNI] 120-277V 50/60Hz			
	<b>Luminaire body options</b>			
	[DPC] Double powder coating			

## Accessories (To be ordered separately)

---

### Anchorage



**623J015**

623J015

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB6075.556-EN-SYM-700-827	[SYM] Symmetric - 139°	1011 lm	27 W	2700K	Ra80		
LB6075.556-EN-SYM-700-830	[SYM] Symmetric - 139°	1039 lm	27 W	3000K	Ra80		
LB6075.556-EN-SYM-700-840	[SYM] Symmetric - 139°	1067 lm	27 W	4000K	Ra80		