

SURFACE MONOPOINT



Category Interior use only IP20 Material Machined Aluminium I Machined Brass Canopy Finish Brushed Aluminium I Rubbed Bronze I Black I White I Custom System Jack Plug Connector LV Rating 75W Max at 12V LED Rating 150W Max at 24V Cut Out Hole NA [surface mounted] Minimum Ceiling Void Depth NA [surface mounted] Maximum Material Thickness NA [surface mounted] Distance Between Screws 50mm Accessories Plug Weight AL I BK I WH - 90g I RB - 210g




The Surface Monopoint is designed for use on beams, walls and ceilings, where the Jack Plug system cannot be recessed into the mounting surface. It is powered by a remote transformer, and is available in brushed aluminium, rubbed bronze, black and white, with custom finishes available on request. Ideal for use with a BESA box.



The Jack Plug system allows the luminaires to be easily removed for cleaning or relamping. The luminaires click into the Jack Plug socket, the threaded jacket then screws into position to lock the connection in place. Once fixed, the luminaires are free to rotate or alternatively, can be secured in place using two locking pins.



Ceiling Material

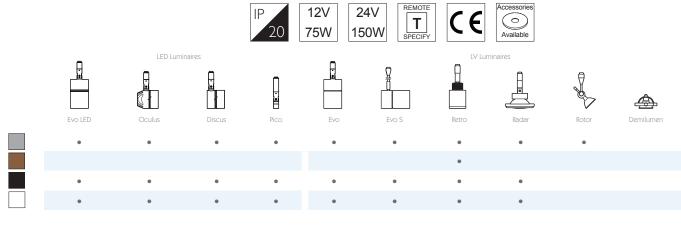

PRECISION LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 0BA t. +44 (0) 20 8947 6616 f. +44 (0) 20 8286 6626