

Category Interior use only IP20

Material Machined Aluminium I Machined Brass

Canopy Finish Brushed Aluminium | Rubbed Bronze | Black | White | Custom

Intertek **System** Jack Plug Connector

LV Rating 75W Max at 12V


LED Rating 150W at 24V Cut Out Hole Ø25mm

Minimum Ceiling Void Depth 45mm Maximum Material Thickness 30mm

Distance Between Screws NA

Accessories Plug

Weight AL | BK | WH - 40g | RB - 46g




The Node Monopoint is the smallest of Precision Lighting's monopoint range. Designed primarily for displays and exhibitions, it can be fixed through panels up to 30mm thick. It is available in standard brushed aluminium, rubbed bronze, black and white finishes, with custom finishes available on request.

The Jack Plug system allows the luminaires to be easily removed for cleaning or relamping. The luminaires click into the Jack Plug socket, the threaded jacket then screws into position to lock the connection in place. Once fixed, the luminaires are free to rotate or alternatively, can be secured in place using two locking pins.



Notes

For Monopoint accessories please see spec sheet MPS-02.

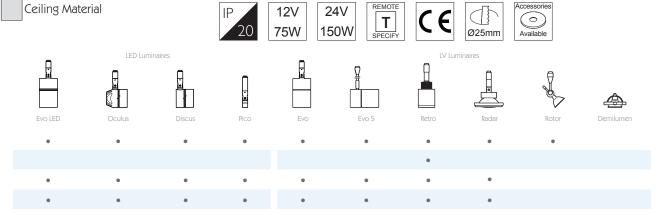



SALES@PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD LONDON SW17 OBA

t. +44 (0) 20 8947 6616 f. +44 (0) 20 8286 6626