



MoMo-F RGB

Specification sheet

KKDC



24V DC

15.6
W/m

4.75
W/ft

IP67




IK08/10
tested



PRODUCT SPECIFICATION

Dimension	H46.4/W25/L93.3-2010mm (H1.83/W0.98/L3.67-79.13in)
PCB increment	83.3mm increment/2000mm max (3.28in increment/78.74in max)
LED pitch	13.9mm - 72LED/m (0.55in - 21.95LED/ft)
Chip	Red Opto tech/Green EPILEDs/Blue ETI
Beam angle	110°
Colours	Red Opto tech/Green EPILEDs/Blue ETI
Bin/Step	5nm tolerance
CRI	N/A
Lifetime	50,000 hours @ 25°C (50,000 hours @ 77°F)
Operating temp	T _a = -20 to 60°C (T _c max = 70°C) T _a = -4 to 140°F (T _c max = 158°F)
IP rating	IP67
Finish	Silver anodised
Cover/lens	Diffused
Mounting	Ground recessed
Connection	Sheathed hardwire tails or male/female connectors
Control	DMX/DALI (see visDIM range)

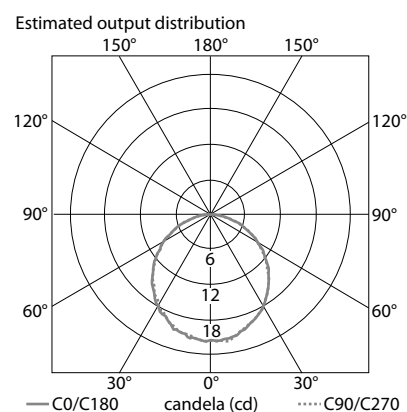

PERFORMANCE DATA

Power consumption	15.6W/m (4.75W/ft)
Supply voltage	24V DC
Supply current	0.65A/m (0.2A/ft)
Luminous flux	Red: 41lm/m Green: 88lm/m Blue: 14lm/m White: 127lm/m (Red: 12lm/ft Green: 27lm/ft Blue: 4lm/ft White: 39lm/ft)

TECHNICAL DRAWING

