

Micro Pendant system Micro Ribbed Pendant

Miniature 3.5 Watt LED pendant





 $\ensuremath{\mathsf{Miniature}}\xspace$ LED pendant for use with Radiant Micro Track system or with surface mount base

Designed to be used in a wide variety of hospitality and residential applications where the quality and control of light is of high importance.

Product description:

Miniature 3.5 Watt pendant

Each pendant - 1 x 3.5 Watt Citizen COB, or Cree XBD LED array

Various LED colour temperature and CRI options available

Various TIR optics available

The light output contains very little heat or UV - ideal for the illumination of sensitive materials

Dim to warm and very low colour temperature LED options are available

Integral DC to DC dimmable LV constant current driver


Dimming options available: 1 - 10V, DALI or DMX

12 V DC Supply

Satin black, satin white or any RAL colour finish

Product Code	IP	Watts per spotlight	Colour Temp. (K)	CRI	Optics		Length of cable (mm)	Mounting Type	Finish	Cable colour
MICRO RIBBED PENDANT	20	3.5	27=2,700k 30=3,000k 40=4,000k 45=4,500k 50=5,000k	80 90	Citizen COB array: Cree XBD LED array:	26° 32° 39° 8° 10° 29° 46° 54°+10°	2mm Ø cable: 100mm - 2000mm 3.5mm Ø cable: 100mm - 6000mm	Surface Track	Black White Any RAL - colour	Black White Clear Nickel Other colours available on request

Radiant Architectural Lighting 10 Broadbent Close 20 - 22 Highgate High Street London N6 5JW ENGLAND UK T: + 44 (0) 20 8348 9003 F: + 44 (0) 20 8348 6478 E: david@radiantlights.co.uk www.radiantlights.co.uk Products and literature designed by DAVID MORGAN ASSOCIATES June 2016

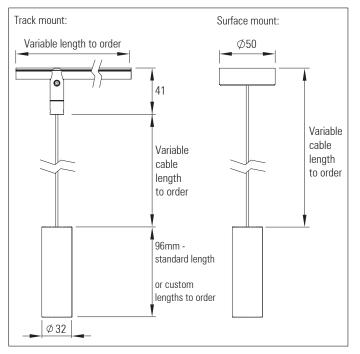



^{EN} **CE**