



# MiMi RGB

## Specification sheet

# KKDC



24V DC

15.6  
W/m


4.75  
W/ft

IP54/67



### PRODUCT SPECIFICATION

<b>Dimension</b>	H15/W13/L103.3-2020mm (H0.59/W0.51/L4.07-79.53in)
<b>PCB increment</b>	83.3mm increment/2000mm max (3.28in increment/78.74in max)
<b>LED pitch</b>	13.9mm - 72LED/m (0.55in - 21.95LED/ft)
<b>Chip</b>	Red Epistar/Green Samsung/Blue Samsung
<b>Beam angle</b>	75° (Clear cover)
<b>Colours</b>	Red 620-625nm/Blue 455-460nm/Green 520-525nm
<b>Bin/Step</b>	5nm tolerance
<b>CRI</b>	N/A
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -25 to 55°C (T <sub>c</sub> max = 70°C) T <sub>a</sub> = -13 to 131°F (T <sub>c</sub> max = 158°F)
<b>IP rating</b>	IP54/IP67
<b>Finish</b>	Silver anodised
<b>Cover/lens</b>	Diffused/Clear
<b>Mounting</b>	Surface mounting via clips or brackets
<b>Connection</b>	Sheathed hardwire tails or male/female connectors
<b>Control</b>	DMX/DALI (see visDIM range)

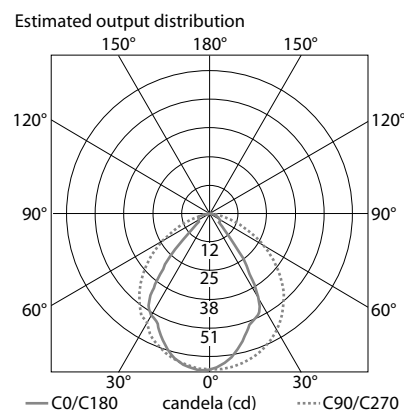

### PERFORMANCE DATA for Clear cover

<b>Power consumption</b>	15.6W/m (4.75W/ft)
<b>Supply voltage</b>	24V DC
<b>Supply current</b>	0.65A/m (0.198A/ft)
<b>Luminous flux</b>	Red: 98lm/m Green: 210lm/m Blue: 35lm/m White: 305lm/m (Red: 30lm/ft Green: 64lm/ft Blue: 11lm/ft White: 93lm/ft)

### TECHNICAL DRAWING

