

# FLEXILINE-T

# VEXICA

*Flexible outdoor led linear luminaire for direct view applications or details lighting*

## LIGHT OUTPUT


CCT/LED Colour in Kelvin	2400, 2700, 3000, 4000
CRI	80
Luminaire Lumens per Metre	320-685
Beam Angle	110°
LED Binning	3 SDCM

## ELECTRICAL

Power Option	6 or 10 w/m
Input Voltage	24 V DC
Connection type	JST IP67
Maximum connected length	4814mm
Approx Power Consumption	6/10 w/m
Dimmable	YES
Max Luminaire Length	4814mm

## PHYSICAL & ENVIRONMENTAL

Finish	White PU Resin
Length in increments of	50mm +14mm
Storage Temp	-30°C to 85°C
Operating Temp	-10°C to 50°C
IP Rating	IP67
IK Rating	03
LED Pitch	8.33mm
Cable Exit/Entry	End
Weight	TBC

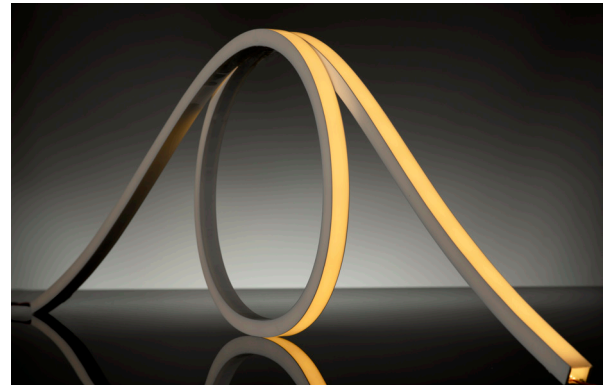

## SPECIFICATION TEXT


A unique top bending flexible LED luminaire. Manufactured in the UK using robust and resistant PU resin components for durability and flexibility. This unique product is designed to bend with the contour of a building facade, features or cove lighting detail. Available in 2 power options and specific colour temperatures. This product offers superb dot free light output from a diffused light emitting surface.



## PRODUCT FEATURES

- Flexible PU resin luminaire.
- Outdoor rated to IP67 rating.
- 24V input for SELV compliance.
- Dimmable via remote LED driver.
- 3 SDCM LED binning.
- Quality LED inside.
- Uses reel to reel LED tape.
- Chamfered ends for seamless end to end lit effects.
- Homogeneous dot free look.
- A range of colour temperatures available.
- Minimum Bend radius 150mm
- Made in the UK.

## DIMENSIONS

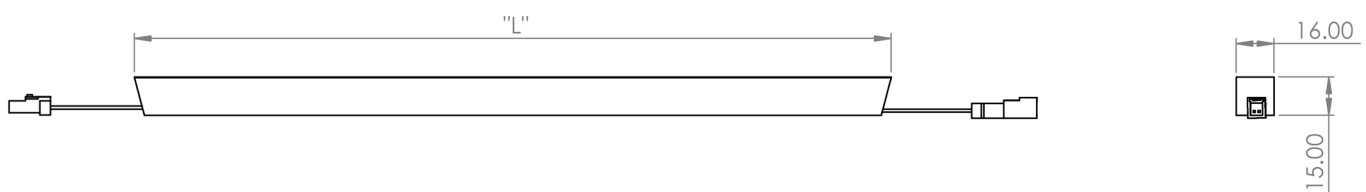

EXAMPLE PART NUMBER: VEX-FLEXILINE-T-1014-6W-2700K-IP67