

FLEXI-MINILINE

VEXICA

Flexible outdoor led linear luminaire for details lighting

LIGHT OUTPUT

CCT/LED Colour in Kelvin	2400, 2700, 3000, 4000
CRI	80
Luminaire Lumens per Metre	350-740
Beam Angle	110°
LED Binning	3 SDCM

ELECTRICAL

Power Option	6 or 10 w/m
Input Voltage	24 V DC
Connection type	JST IP67
Maximum connected length	4808mm
Approx Power Consumption	6/10 w/m
Dimmable	YES
Max Luminaire Length	4808mm

PHYSICAL & ENVIRONMENTAL

Finish	White PU Resin
Length in increments of	50mm +8mm
Storage Temp	-30°C to 85°C
Operating Temp	-10°C to 50°C
IP Rating	IP67
IK Rating	03
LED Pitch	8.33mm
Cable Exit/Entry	End
Weight	TBC



SPECIFICATION TEXT


Our flexible low profile top view PU encapsulated LED luminaire with a cross section of 15mm wide x 5.95 mm deep. Allows for bending in a top direction. Minimum Bend radius = 60mm. The luminaire is designed to be clipped in place with stainless steel fixing clips or 3m adhesive tape. (upto 6 per M). Can be supplied in up to 4808mm. It is provided with IP67 plug in male/female connectors. (not cuttable, manufactured lengths to order)



PRODUCT FEATURES

- Flexible PU resin luminaire.
- Outdoor rated to IP67 rating.
- 24V input for SELV compliance.
- Dimmable via remote LED driver.
- 3 SDCM LED binning.
- Quality LED inside.
- Uses reel to reel LED tape.
- A range of colour temperatures available.
- Minimum Bend radius 60mm
- Made in the UK.

DIMENSIONS

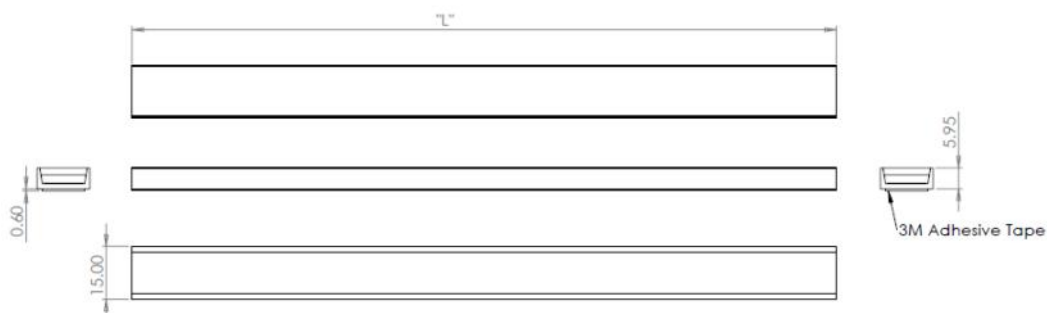

EXAMPLE PART NUMBER: VEX-FLEXI-MINILINE-S-1008-6W-2700K-IP67