


IP20	IP54	POWER SUPPLIES	CABLES	PROFILES	CONNECTORS	PCB COLOUR	19.04 W/m
1494 Lm/m	CE	RoHS COMPLIANT					

■ PRODUCT SPECIFICATION

Dimension	L5000/W10mm
PCB increment	Power connection and cut point every 25mm
LED pitch	4.17mm
Chip	Epistar
Beam angle	120°
Colours	White
Bin/step	3 Step MacAdam ellipse
CRI	93.3
Lifetime	50000hrs @45°
Operating temp.	0 - 50°C
IP rating	IP20/54
Mounting	3M VHB backing tape
Minimum bend radius	10mm
Connection	Hardwire tails or male/female connectors
Control	0-10V/1-10V/DMX/DALI

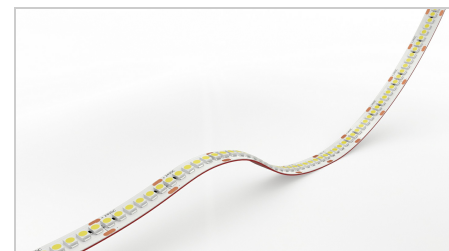


■ PERFORMANCE DATA (for 1000mm)

Power consumption	19.04W
Supply voltage	24V DC
Supply current	0.793A
Luminous flux	1494Lm/M

TECHNICAL DRAWING

IP 20/54

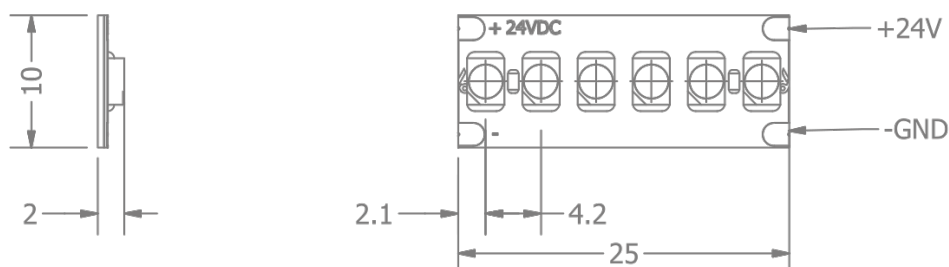

PRODUCT DETAILS

Product name	ECO FLEX 240
Stated output	1494lm per metre
Description	Flexible LED Tape, 3000K, 24V, 19.04W/m
Quantity/length of product tested	1 x 1000mm
Bin tolerance/# . MacAdams ellipse of chip	3 Step MacAdam ellipse

ELECTRICAL CHARACTERISTICS

Input Voltage (V DC)	24
Input power (WDC)	19.04
Input Current (mA DC)	793mA

LIGHT OUTPUT

Total light output (Lumens)	1494
Luminaire efficacy (lm/W)	78.47
Beam angle	120°


COLOUR CHARACTERISTICS

Correlated colour temperature (CCT)	3091K
Colour rendering index (CRI, Ra)	93.3
Chromaticity coordinates (CIE 1931 - x,y)	0.4282, 0.3965

COLOUR RENDERING INDEX

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94	97	98	93	93	95	93	85	66	91	93	79	95	98	91

CHROMATICITY DIAGRAM

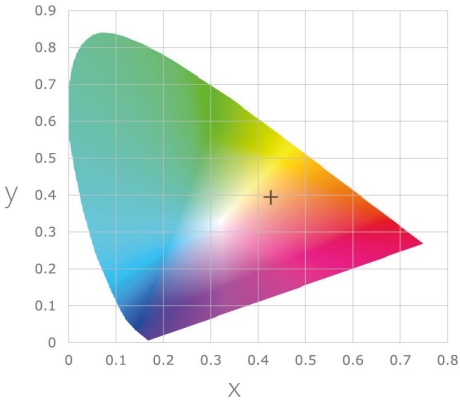

SPECTRAL RADIANT FLUX VERSUS WAVELENGTH

