


THE LUX COMPANY Gola 95 Recessed Trim Initial/End




THE
LUX
COMPANY

Gola 95 Recessed Trim Initial/End - Trim

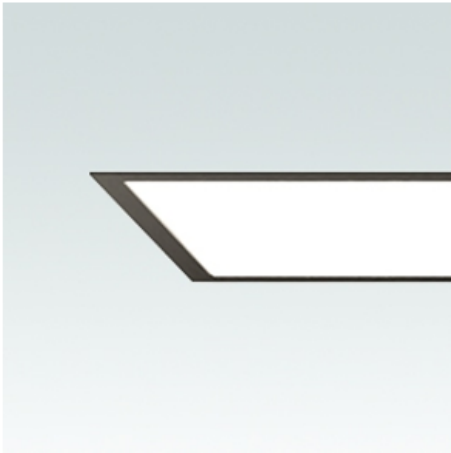

G9FI1128-903000D010



- 1408 mm [55.43\"]
- 1128 mm [44.40\"]
- 848 mm [33.38\"]
- 568 mm [22.36\"]



98 x (L+14)
mm

DESCRIPTION

Recessed trim or trimless linear luminaire system with installation via adjustable brackets. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm) and mountable vertically or horizontally. System versions can be configured into linear, 90 ° L, T and X shapes or other custom configurations (details are all by request). Gola 95 and 160 can incorporate spotlight modules. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

ORDERING CODE

Follow the steps to specify your fixture final code, example: RE61MB13-803020DL11

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Gola LED Module 1128 - LED Module

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 53.68

DELIVERED LUMEN: 7920lm

IP: 40

Notes:




PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9FI	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:


We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----

Gola 95 Recessed Trim Middle - Trim

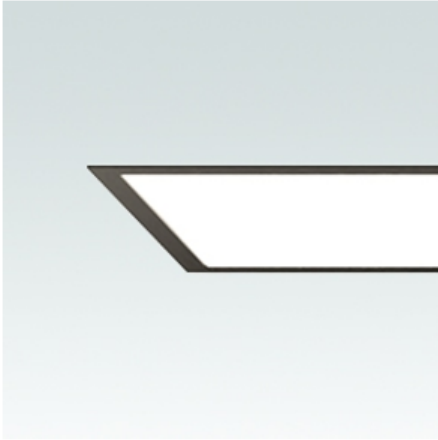

G9FB1128-903000D010



- 1 1408 mm [55.43\"]
- 2 1128 mm [44.40\"]
- 3 848 mm [33.38\"]
- 4 568 mm [22.36\"]



98 x (L+14)
mm

DESCRIPTION

Recessed trim or trimless linear luminaire system with installation via adjustable brackets. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm) and mountable vertically or horizontally. System versions can be configured into linear, 90 ° L, T and X shapes or other custom configurations (details are all by request). Gola 95 and 160 can incorporate spotlight modules. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9FB	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Built-in with body - Gola LED Module 1128 - LED Module
SDCM:	
CCT:	30 - 3000K
CRI:	90
SYSTEM POWER:	53.68
DELIVERED LUMEN:	7920lm
IP:	40
Notes:	




THE LUX COMPANY Gola 95 Recessed Trim Stand Alone




THE
LUX
COMPANY

Gola 95 Recessed Trim Stand Alone - Trim

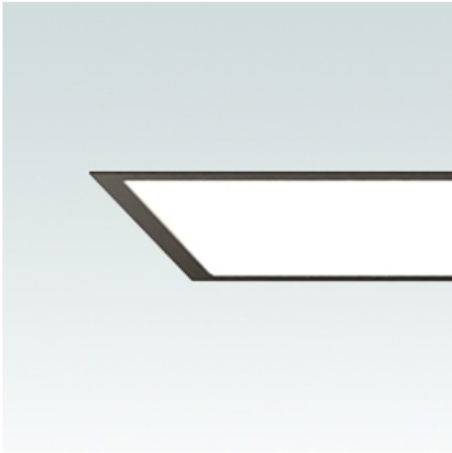

G9FS1128-903000D010

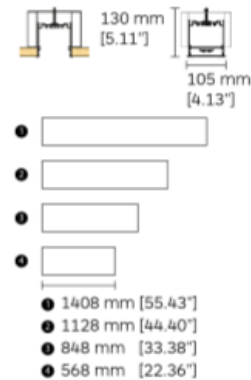

98 x (L+14)
mm

DESCRIPTION

Recessed trim or trimless linear luminaire system with installation via adjustable brackets. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm) and mountable vertically or horizontally. System versions can be configured into linear, 90 ° L, T and X shapes or other custom configurations (details are all by request). Gola 95 and 160 can incorporate spotlight modules. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Built-in with body - Gola LED Module 1128 - LED Module
SDCM:	
CCT:	30 - 3000K
CRI:	90
SYSTEM POWER:	53.68
DELIVERED LUMEN:	7920lm
IP:	40
Notes:	



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9FS	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.


HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----

THE LUX COMPANY Gola 95 Recessed Trimless Initial/End





THE
LUX
COMPANY

Gola 95 Recessed Trimless Initial/End - Trimless

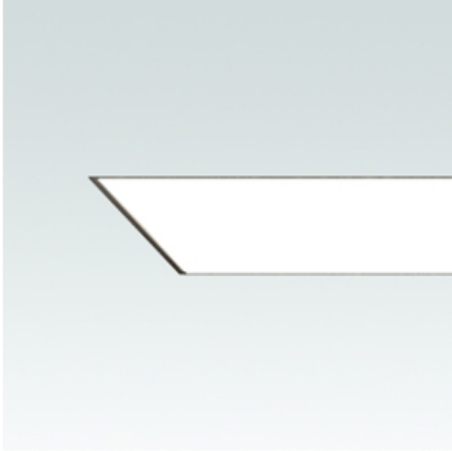

G9MI1128-903000D010



98 x (L+4)
mm

DESCRIPTION

Recessed trim or trimless linear luminaire system with installation via adjustable brackets. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm) and mountable vertically or horizontally. System versions can be configured into linear, 90° L, T and X shapes or other custom configurations (details are all by request). Gola 95 and 160 can incorporate spotlight modules. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9MI	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Gola LED Module 1128 - LED Module

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 53.68

DELIVERED LUMEN: 7920lm


IP: 40

Notes:







Gola 95 Recessed Trimless Middle - Trimless

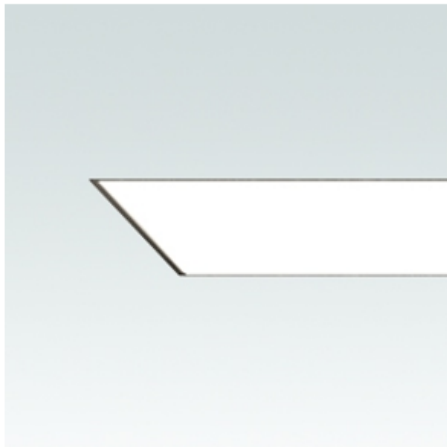

G9MB1128-903000D010



- 1 1408 mm [55.43"]
- 2 1128 mm [44.40"]
- 3 848 mm [33.38"]
- 4 568 mm [22.36"]



98 x (L+4)
mm

DESCRIPTION

Recessed trim or trimless linear luminaire system with installation via adjustable brackets. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm) and mountable vertically or horizontally. System versions can be configured into linear, 90° L, T and X shapes or other custom configurations (details are all by request). Gola 95 and 160 can incorporate spotlight modules. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Gola LED Module 1128 - LED Module

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 53.68

DELIVERED LUMEN: 7920lm

IP: 40

Notes:



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9MB	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.


HONG KONG - LONDON - MILAN - SHANGHAI - USA

THE LUX COMPANY Gola 95 Recessed Trimless Stand Alone




THE
LUX
COMPANY

Gola 95 Recessed Trimless Stand Alone - Trimless

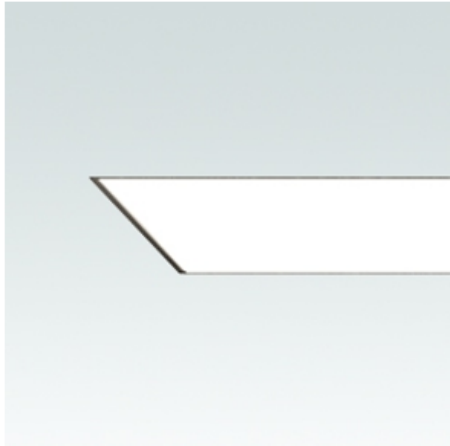

G9MS1128-903000D010



- ① 1408 mm [55.43"]
- ② 1128 mm [44.40"]
- ③ 848 mm [33.38"]
- ④ 568 mm [22.36"]



98 x (L+4)
mm

DESCRIPTION

Recessed trim or trimless linear luminaire system with installation via adjustable brackets. Luminaire housing in extruded aluminium and end caps in cast aluminium. Satin white diffuser in extruded UV heat resistant acrylic. End caps are mechanically attached with no exposed fasteners. Available in four width apertures (40-60-95-160mm) and mountable vertically or horizontally. System versions can be configured into linear, 90 ° L, T and X shapes or other custom configurations (details are all by request). Gola 95 and 160 can incorporate spotlight modules. Optional Gimbal light head module with tiltable and routable heads for Gola 95 and 160.

MOUNTING

Indoor Lighting - System

OPTIC

Acrylic opal white diffuser.

ELECTRICAL / LED DRIVER

D0 - No Dimming

ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Gola LED Module 1128 - LED Module

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 53.68

DELIVERED LUMEN: 7920lm

IP: 40

Notes:



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
G9MS	1128	-	90	30 - 3000K	00	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----