



## GENERAL SPECIFICATION

**Body and trim:** Aluminium.

**Finish:** Powder coated.

**Diffuser:** Protruding Lens (2.1mm/0.08").

**Drivers:** Remote, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard. Wire size 18 AWG - max distance (from fixture to drivers)40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

**Remote Emergency:** Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

**L70 @25deg C:** > 50,000 hrs.

**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI), White LEDs only.


## MOUNTING & OPTICS




Ceiling Direct/Indirect




Ceiling Direct




Wall Direct/Indirect




Wall Direct




95 9410




95 9420




95 9430




95 9440




95 9510



95 9520



95 9530



95 9540

## HOW TO ORDER

### A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power (LED):	Light Distribution:	Delivered lms:	LPW:
95 9410	914mm/36"	25W	Direct	1974	79
95 9420	1219mm/48"	33W	Direct	2606	79
95 9430	1524mm/60"	40W	Direct	3160	79
95 9440	1829mm/72"	50W	Direct	3950	79
95 9510	914mm/36"	32W	Direct/Indirect	2562	80
95 9520	1219mm/48"	40W	Direct/Indirect	3204	80
95 9530	1524mm/60"	49W	Direct/Indirect	3927	80
95 9540	1829mm/72"	61W	Direct/Indirect	4890	80

### B SPECIFY CCT/COLOR (DIRECT)

D30	3000K (min 80 CRI)
D35	3500K (min 80 CRI)
D40	4000K (min 80 CRI)
DRD	Red
DGN	Green
DBL	Blue

### C SPECIFY CCT/COLOR (INDIRECT)

N30	3000K (min 80 CRI)
N35	3500K (min 80 CRI)
N40	4000K (min 80 CRI)
NRD	Red
NGN	Green
NBL	Blue

### D SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White

### E SPECIFY LUMEN & WATTAGE REDUCTION (DIRECT ILLUMINATION ONLY)

PRO	Lumen & Wattage Reduction to approximately 25% of standard output
PR1	Lumen & Wattage Reduction to approximately 50% of standard output
PR2	Lumen & Wattage Reduction to approximately 75% of standard output

#### Additional Information

Lumen reduction available for direct light only. Custom Reduction Percentages Available Upon Request.

### F SPECIFY OPTIONS

RE	Remote Emergency System
----	-------------------------



# MICRO ELLIPSE II

WEB PIN 530

EXAMPLE CODE

959510/D35/NRD/WH

## DIMENSIONAL DIAGRAMS

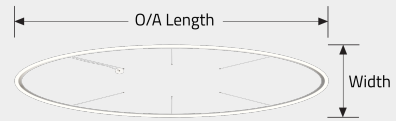

**O/A Length X Width:**  
914mm/36" X 406mm/16"  
1219mm/48" X 483mm/19"  
1524mm/60" X 559mm/22"  
1829mm/72" X 635mm/25"

## APPROVALS

