



GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Finish: Driver enclosure, white powder coated. Bezel, frosted acrylic.

Diffusers: Frosted acrylic.

Drivers: Integral, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard.

Mechanical: Luminaires mount directly over J box (by others - North America only).

L70 @25deg C (77deg F): > 50,000 hrs.


Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI), minimal uplight for halo effect.

Approvals: Damp Location (Indoor use only).


MOUNTINGS & OPTICS




Interior - Ceiling




27 0100




27 0102



27 0104



27 0106



27 0108

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Type:	Power:	Delivered lms:	LPW:	Dimensions:
27 0100	A	14W	1514	108	232mm/9" x 232mm/9"
27 0102	B	23W	2567	108	232mm/9" x 232mm/9"
27 0104	C	32W	3460	108	232mm/9" x 232mm/9"
27 0106	D	19W	2053	108	288mm/11" x 232mm/9"
27 0108	E	27W	2917	108	288mm/11" x 232mm/9"

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)


C SPECIFY OPTIONS

EM	Integral Emergency (EU Only)
Additional Information	
Not available in North America	


EXAMPLE SPECIFICATION CODE

270100/35


DIMENSIONAL DIAGRAMS

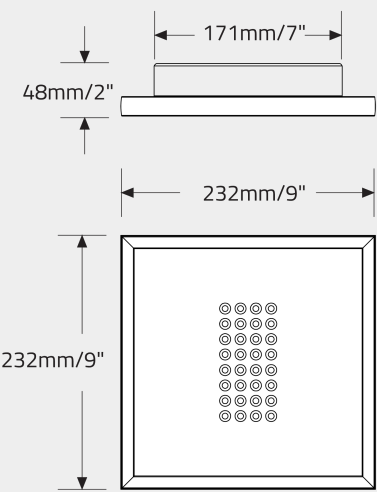


TYPE A

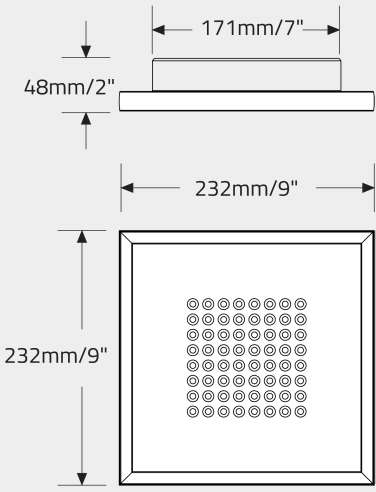


TYPE B

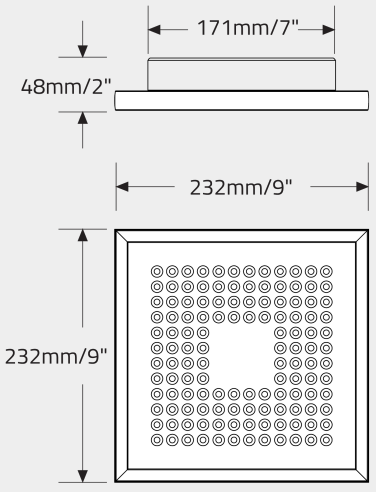

TYPE C

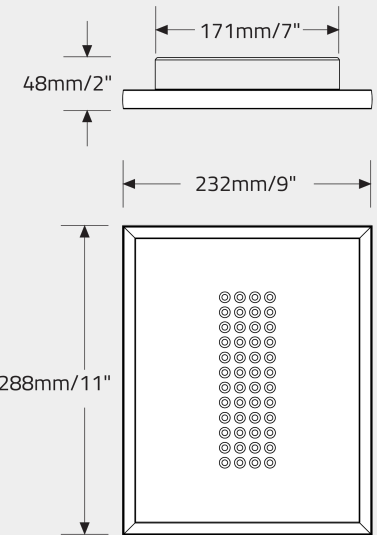

TYPE D

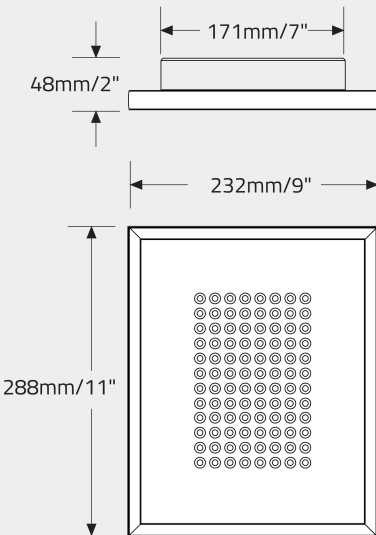

TYPE E

APPROVALS

