

GENERAL SPECIFICATION

Body: Aluminium, Equilateral Triangle

Finish: Powder coated.


Diffusers: Frosted acrylic.

Drivers: Remote, HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming standard. Wire size 18 AWG - max distance (from fixture to drivers)40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.


L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


MOUNTING & OPTICS




Interior - Surface
Mounted-Ceiling-
Inside




Interior - Surface
Mounted-Wall-Inside



98 4310



98 4320



98 4330

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Length:	Power (LED):	Light Direction:	Delivered lms:	LPW:
98 4310	610mm/24"	16W	Inside	1768	111
98 4320	915mm/36"	24W	Inside	2768	115
98 4330	1219mm/48"	32W	Inside	3657	114

B SPECIFY CCT/COLOR

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)
RD	Red
GN	Green
BL	Blue

C SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White
Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

D SPECIFY LUMEN & WATTAGE REDUCTION

PRO	Lumen & Wattage Reduction to approximately 25% of standard output
PR1	Lumen & Wattage Reduction to approximately 50% of standard Output
PR2	Lumen & Wattage Reduction to approximately 75% of standard Output



Additional Information

Note: Custom Reduction Percentages Available Upon Request.

EXAMPLE SPECIFICATION CODE

984305/35/BL

DIMENSIONAL DIAGRAMS

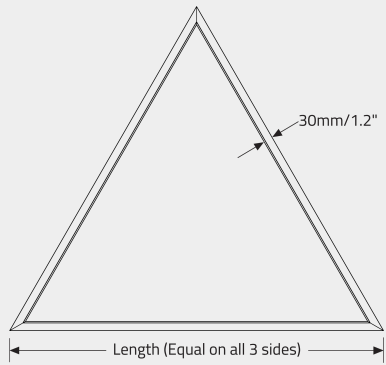

APPROVALS

