

THE LUX COMPANY Topaz ACB Square LED Downlight with Tridonic SLE




DESCRIPTION



Architectural square mini-downlight featuring a discreet low profile bezel with a deep matt black baffle to minimise glare. Powered by Tridonic SLE and fitted with a medium beam reflector and integral IP44 protective lens. Narrow beam, white softlight baffle and plaster-in versions available along with dimming, emergency and high colour rendering options. Complements ACB twin and triple as well as a range of wall wash and round mini-downlights: ACC, ACJ and ACA.

SPECIFICATIONS

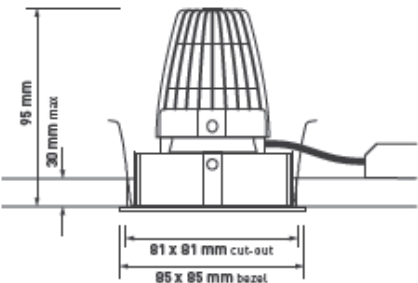

Nominal weight	0.3 kg
Mains voltage	220 - 240 V
Mains frequency	50 - 60 Hz
Ingress protection (front)	IP44
Ingress protection (rear)	IP20
Mains lead	500 mm LSF
Dimming lead	500 mm 2 core LSF
Colour consistency - MacAdam Ellipse	3 SDCM
Warranty	5 years
Power factor	>0.9
Beam angle	35°



PERFORMANCE DATA

Colour Temp (K)	Luminaire Output (Llm)	Luminaire Power (W)	Luminaire Efficacy (Llm/W)	UGR	Colour Rendering (Ra)	Operating Ambient Temperature (°C)	Model Ref
2700	536	8.5	63.1	<15	90	-25 to +35	ACB001
2700	695	10.5	66.4	<16	90	-25 to +25	ACB004
3000	647	8.5	76.2	<16	80	-25 to +35	ACB002
3000	839	10.5	80.0	<17	80	-25 to +25	ACB005
4000	674	8.5	79.4	<16	80	-25 to +35	ACB003
4000	874	10.5	83.5	<17	80	-25 to +25	ACB006