



GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Finish: Back plate, powder coated gloss white. Cover, finished as listed.

Diffuser: Opal acrylic.


Dust covers: Opal dust cover standard.

Drivers: HPF electronic, 120-277V (EU-240V), 0-10V, 1% dimming standard.


Mechanical: Luminaires mount directly to a junction box. (by others - North America Only).

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI).


MOUNTING & OPTICS



Interior - Wall-
Front/Back



59 1110



59 1141

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Power (LED):	Delivered lms:	LPW:	Height (A):	Width (B):	Weight:
59 1110	14W	940	64	330mm/13"	216mm/8.5"	4Kg/9lb
59 1141	32W	2120	69	610mm/24"	254mm/10"	8Kg/18lb

B SPECIFY CCT

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY DIFFUSER

OP	Opal
FB	Beige faux alabaster
FW	White faux alabaster


D SPECIFY FINISH

MB	Metallic Bronze
MS	Metallic Silver
AB	Antique Brass
PB	Polished Brass
SB	Satin Brass
SN	Satin Nickel
OT	Other Painted Finish (RAL number required)

EXAMPLE SPECIFICATION CODE

591110/35/OP/MS

DIMENSIONAL DIAGRAMS

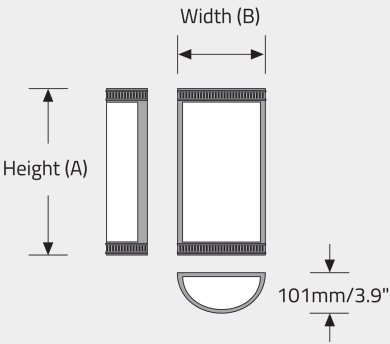

APPROVALS

