

THE LUX COMPANY Surface AJI 420 mm LED Bulkhead with Tridonic CLE




DESCRIPTION



Professional LED bulkhead designed for areas with long operating hours in public and commercial applications, leisure and care home facilities. Built around the Tridonic CLE module and fitted with an opal polycarbonate diffuser to minimise glare and LED spotting, it can be ceiling or wall mounted. The AJI is available with dimming, emergency conversion and integrated presence detector options, as well as a variety of decorative bezels.

SPECIFICATIONS

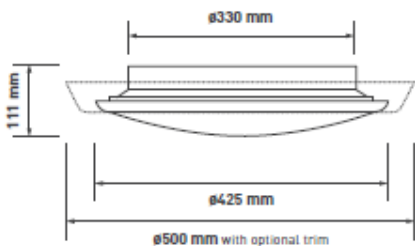

Nominal weight	2.0 kg
Mains voltage	220 - 240 V
Mains frequency	50 - 60 Hz
Ingress protection	IP20
Operating ambient temperature	-25°C to +35°C
Colour rendering	R _a 80



PERFORMANCE DATA


Colour Temp (K)	Luminaire Output (Llm)	Luminaire Power (W)	Luminaire Efficacy (Llm/W)	Model Ref
3000	1575	15.3	102.9	AJI1501
3000	2288	20.3	112.7	AJI4001
4000	1716	15.4	111.4	AJI1502
4000	2499	20.3	123.1	AJI4002



OPTIONS



/ECO
SwitchDIM, DALI or DSI



/EM
3 hour emergency
conversion



/SO
Sensor on / off



/SD
Sensor dim (10 / 100%)
Not available with **/ECO**

FINISHES



DB001
Gloss white trim



DB002
Brushed aluminium effect
trim



DB003
Chrome trim