

STR9® LITE

INFINITY®
GVA TECHNOLOGY

COLOR-AMP®
GVA TECHNOLOGY


GVA
LIGHTING

RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET



DATE:	
TYPE:	
COMPANY:	
PROJECT:	

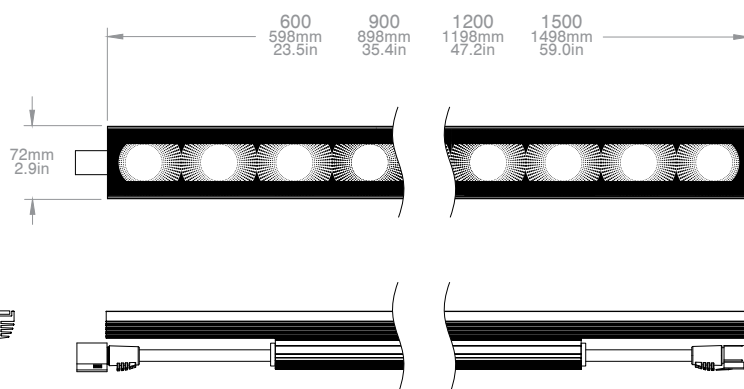

FEATURES:

Lighting Performance:

- Up to 2413 delivered lumens/meter (724 lumens/foot)
- COLOR-AMP® technology allows up to three times higher light output in specific colors
- White CCT 3000K
- Optics and diffusing film for outstanding color mixing (no striations or colour separation)
- Homogenous light output immediately adjacent to luminaire
- LED pitch is maintained within and between luminaires (no dark spots between fixtures)
- Color match with FL100™ RGBW-IM

Mechanical Details:

- Compact size, only 56.1mm (2.21in) high x 72.0mm (2.83in) wide
- IP50 rated simplified indoor construction for reduced fixture cost
- Optically clear tempered glass lens (no yellowing over time)
- Guaranteed long life time and high performance, no electrolytic capacitors in all DC designs
- Through wiring for end-to-end connection via snap-in connectors

Control:

- DMX control through GVA's power-data equipment
- 300mm resolution, each 300mm section can be addressed autonomously, self-addressing fixtures

Projected Lifetime: L70 > 54,000hrs @ $t_a = 50^\circ\text{C}$ (122°F)

Operating Temperatures: 0°C (32°F) to $+50^\circ\text{C}$ (122°F)

OPTIONS:

Power Source: INFINITY® Technology (INF) for exceptionally long runs from a single power source or Extra Low Voltage (ELV) for short runs, remote power supplies

Power Options: 15W or 20W per 300mm (1ft)

Nominal Length: 600mm (2ft), 900mm (3ft), 1200mm (4ft) and 1500mm (5ft) or custom length: 300' or 1800'

Beam Distribution: Range of round and elliptical beam angles available

Body Color: Black matte and clear matte anodized or custom color

Accessories:

- 8 adjustable and 3 non-adjustable mounting brackets
- Glare control louvers

LED Color:

- Custom LED color combinations available

SPECIFICATION LOGIC: STR9® LITE RGBW

FAMILY	NOMINAL LENGTH	BODY COLOR	POWER (per 300mm/1ft)	LED COLOR	OPTICS (FWHM)	INPUT VOLTAGE
STR9-LITE	300' 300E ¹ 600 900 1200 1500 1800	BM - Black Matte Anodized CM - Clear Matte Anodized	15W 20W	RGBW (3000K)	10 - $10^\circ \times 10^\circ$ 12 - $12^\circ \times 12^\circ$ 15 - $15^\circ \times 15^\circ$ 30 - $30^\circ \times 30^\circ$ 60 - $60^\circ \times 60^\circ$ 80 - $80^\circ \times 80^\circ$ 10x35 - $10^\circ \times 35^\circ$ 15x60 - $15^\circ \times 60^\circ$ 30x60 - $30^\circ \times 60^\circ$ Other distributions available. Consult factory.	ELV - 24VDC or 48VDC ^{2,3} INF - 380VDC ⁴

PRODUCT CONFIGURATION

1 - Custom; consult factory, some restrictions apply, 300E applies to end condition

2 - For short/medium runs; 300mm (1ft) addressability for dimming; remote power-data equipment required

3 - For landscape lighting use 24VDC power-data equipment

4 - For long runs; full luminaire addressability for dimming; remote INFINITY® power-data equipment required

RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET

PRODUCT SPECIFICATIONS: STR9® LITE RGBW								
Nominal Length			300/300E ¹	600	900	1200	1500	1800 ¹
Electrical	Rated Input Voltage	24VDC, 48VDC or 380VDC						
	Power Consumption @ 24 or 48VDC Input	15W	15.3/	30.6	45.9	61.2	76.5	91.8
		20W	18.5/	37	55.5	74	92.5	111
	Power Consumption @ 380VDC Input	15W	/29.3	44.6	59.9	75.2	90.5	105.8
Optical		20W	/32.5	51	69.5	88	106.5	125
	Light Source	4 x High Power 4 in 1 LEDs per 300mm (1ft)						
	COLOR-AMP™ 15W Lumen Output (typical)	All On	687	1374	2061	2748	3435	4122
		Red	323	646	969	1292	1615	1938
		Green	476	952	1428	1904	2380	2856
		Blue	280	560	840	1120	1400	1680
		White (3000K)	531	1062	1593	2124	2655	3186
	COLOR-AMP™ 20W Lumen Output (typical)	All On	724	1448	2172	2896	3620	4344
		Red	315	630	945	1260	1575	1890
		Green	470	940	1410	1880	2350	2820
		Blue	207	414	621	828	1035	1242
		White (3000K)	503	1006	1509	2012	2515	3018
	Optic	High optical efficiency PMMA TIR lens, micro lens film, tempered glass cover lens						
	Beam Angle (FWHM)	10 (10° x 10°), 12 (12° x 12°), 15 (15°x15°), 30 (30°x30°), 60 (60°x60°), 80 (80°x80°) 10x35 (10°x35°), 15x60 (15°x60°) 30x60 (30°x60°)						
	Projected Lumen Maintenance	L70 > 65,000hrs @ t ₅₀ =50°C (122°F)						
Control	Control Protocol	DMX control through GVA's Power-Data Equipment						
Physical	Size (WxH)	mm	72.0 x 56.1					
		inches	2.83 x 2.21					
	Actual Length	mm	298/333	598	898	1198	1498	1798
		inches	11.73/13.11	23.54	35.35	47.17	58.98	70.79
	Weight	kg	1.07	2.14	3.21	4.28	5.35	6.42
		lbs	2.36	4.72	7.08	9.44	11.79	14.15
	Housing	Extruded aluminum body, tempered flat glass lens						
	Fixture Connections	Input and output snap-in connectors for end-to-end connection						
	Rated Operation Temperature	0°C to 50°C (32°F to 122°F)						
Certification & Safety	Minimum Starting Temperature	0°C (32°F)						
	Environment	Dry or damp locations only						
	IES Classifications	Class 1 LED Luminaire						
	  		CE Certified QPS Field Inspection RoHS Compliant Constructed to meet requirements outlined in UL1598 & IEC60598					

1 - Custom configuration, consult factory

These figures are subject to change due to further development and innovations of LED light sources.

SELECTING LUMINAIRE VOLTAGE

24VDC

- for short runs only, up to 3.9m (12ft)
- use when class 2 circuit is required

48VDC

- for any short and medium length run, up to 7.8m (25ft)

380VDC

- for long runs, up to 76.5m (250ft)
- compatible with data center power grids
- compatible with solar and wind power

MAXIMUM RUN LENGTHS


	15W	20W
24VDC	N/A	3.9m (12ft)
48VDC	N/A	7.8m (25ft)
380VDC	N/A	76.5m (250ft)

Ratings are for 30°C, de-rating will be used for higher ambient temperatures


RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET

TYPICAL SYSTEM DIAGRAM: INFINITY® WITH CONTROL

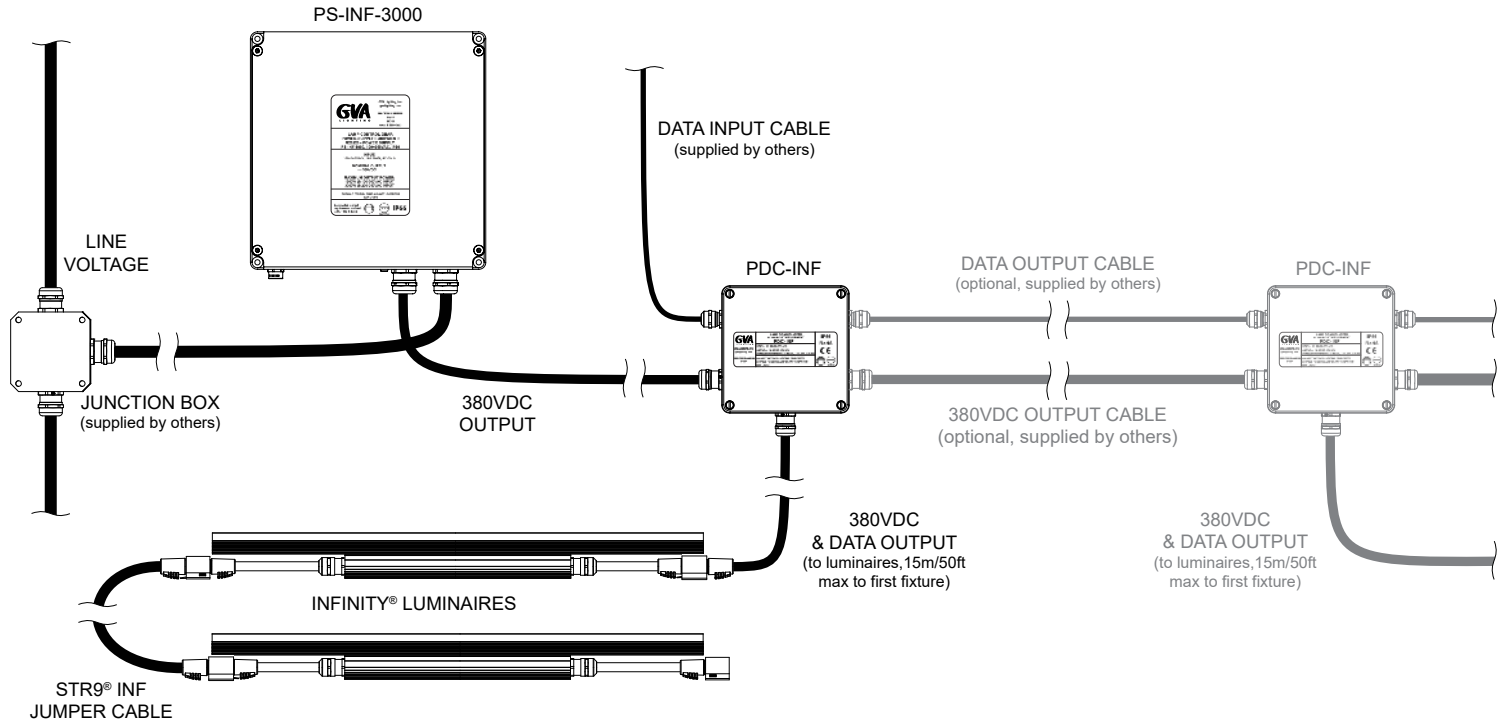


TYPICAL SYSTEM DIAGRAM: INFINITY® WITHOUT CONTROL

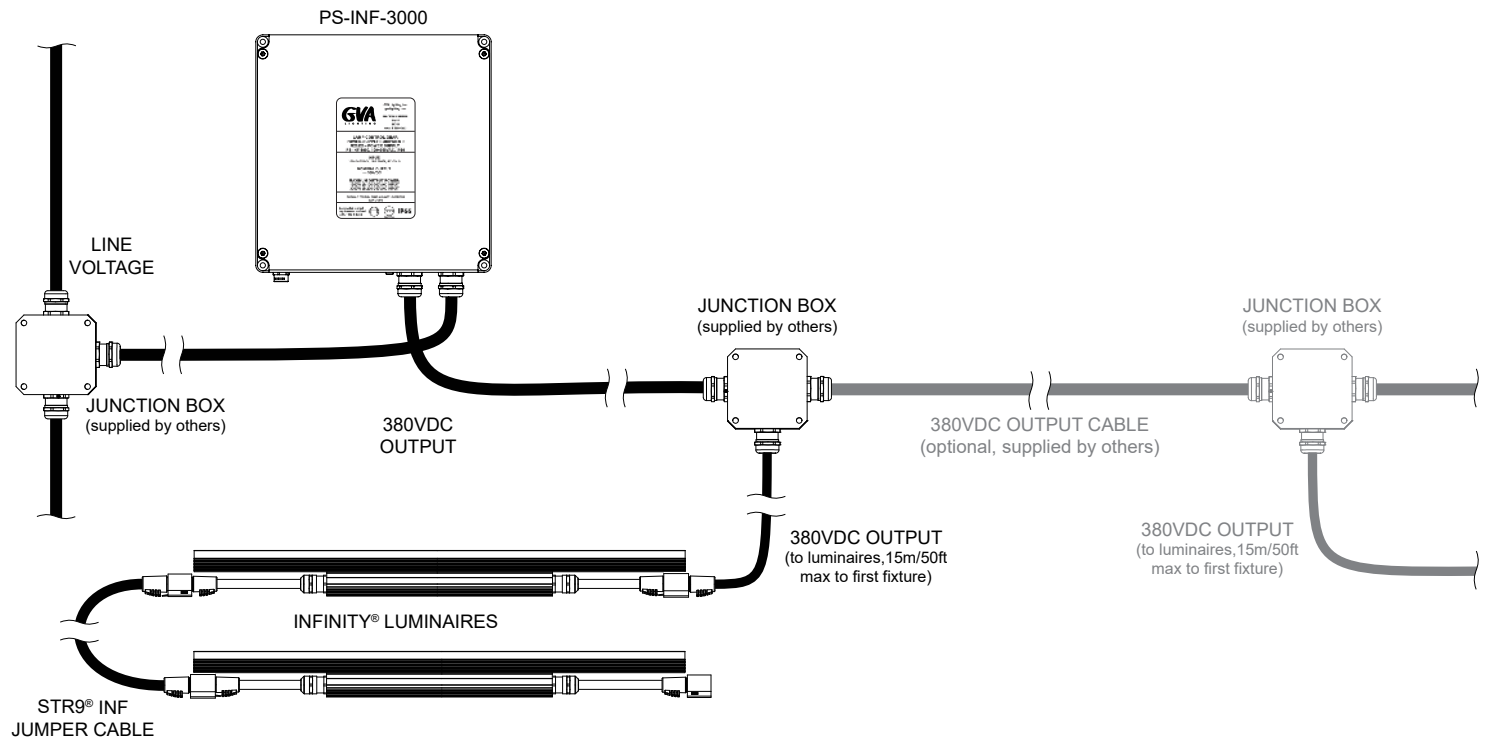


RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET

TYPICAL SYSTEM DIAGRAM: ELV WITH CONTROL

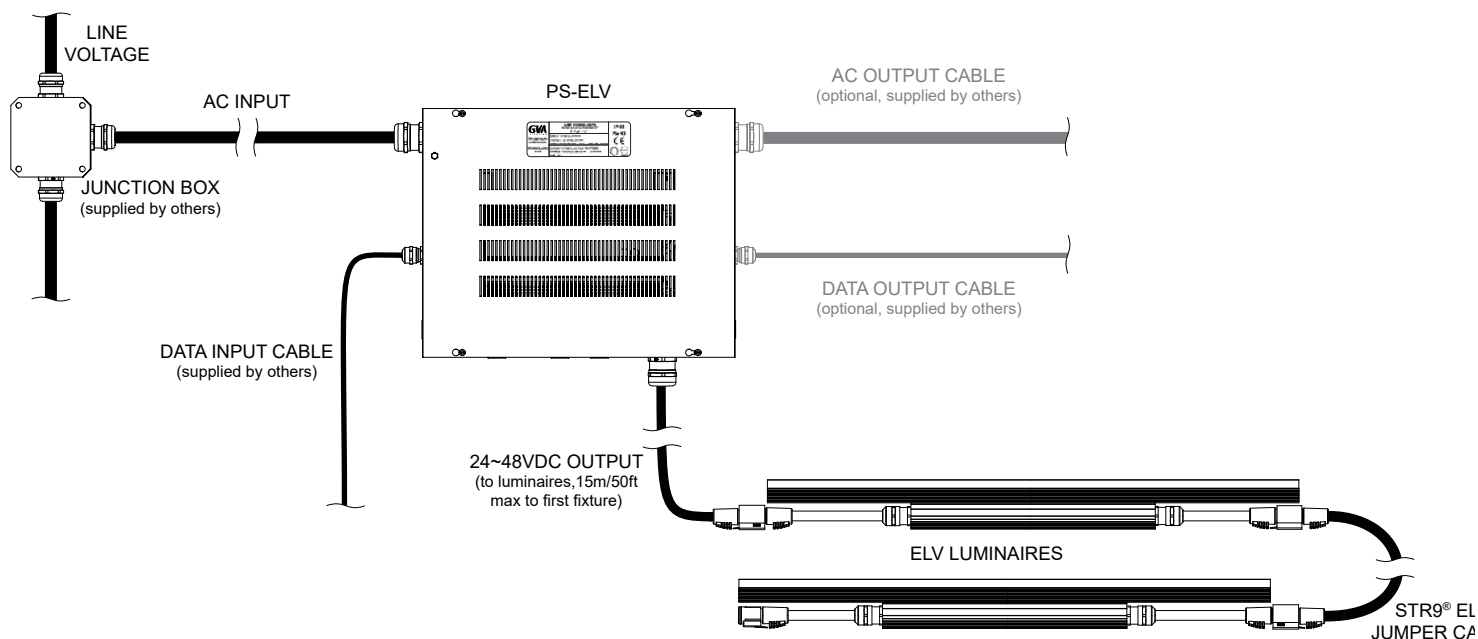

TYPICAL SYSTEM DIAGRAM: ELV WITHOUT CONTROL


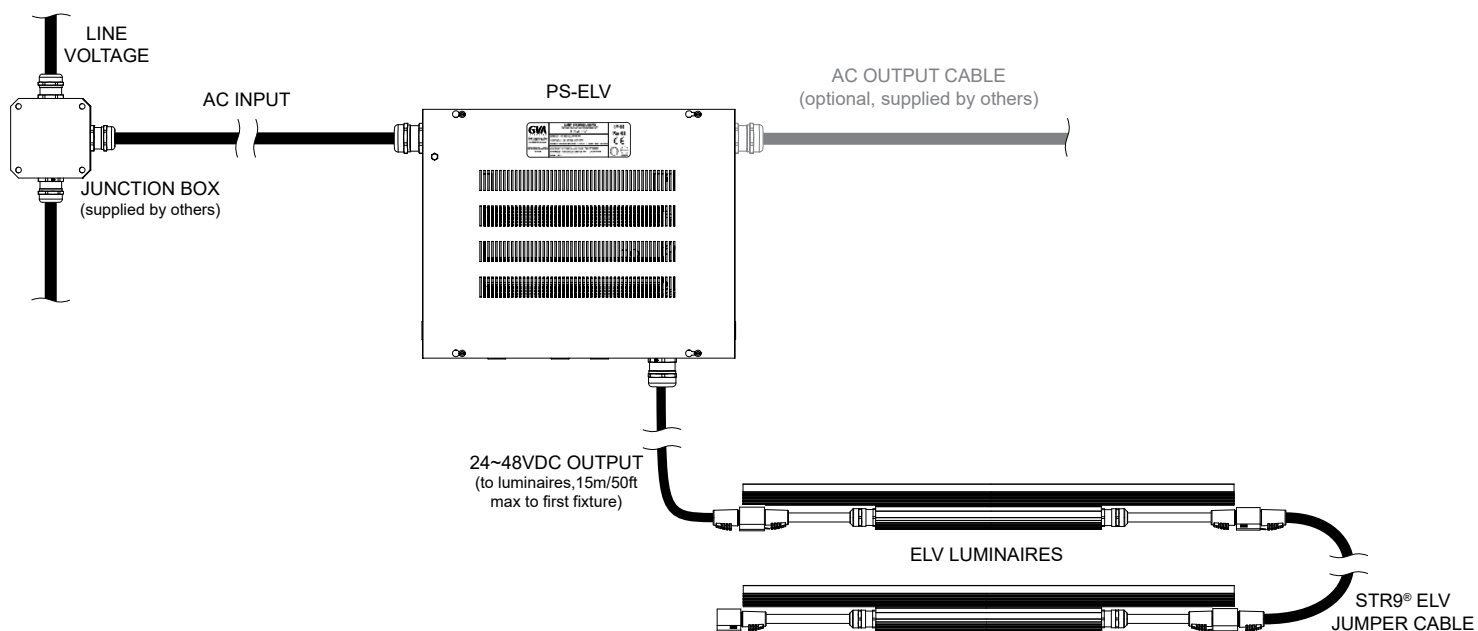


RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET




ORDERING LOGIC: STR9® MOUNTING ACCESSORIES

WXX - ADJUSTABLE WALL MOUNT BRACKET KIT






W40 ADJUSTABLE WALL MOUNT

COLOR	PART NUMBER
Clear Matte Anodized	121128
Black Matte Anodized	121129






W80 ADJUSTABLE WALL MOUNT

COLOR	PART NUMBER
Clear Matte Anodized	121130
Black Matte Anodized	121131






W130 ADJUSTABLE WALL MOUNT

COLOR	PART NUMBER
Clear Matte Anodized	121132
Black Matte Anodized	121133



W155 ADJUSTABLE WALL MOUNT




COLOR	PART NUMBER
Clear Matte Anodized	121134
Black Matte Anodized	121135



W180 ADJUSTABLE WALL MOUNT




COLOR	PART NUMBER
Clear Matte Anodized	121136
Black Matte Anodized	121137

SMA-I - INSIDE ADJUSTABLE SURFACE MOUNT BRACKET KIT





COLOR	PART NUMBER
Clear Matte Anodized	121138
Black Matte Anodized	121139

SMA-O - OUTSIDE ADJUSTABLE SURFACE MOUNT BRACKET KIT



COLOR	PART NUMBER
Clear Matte Anodized	121825
Black Matte Anodized	121826

SML - SURFACE MOUNT BRACKET KIT, NON-ADJUSTABLE




COLOR	PART NUMBER
Clear Matte Anodized	121140
Black Matte Anodized	121141

RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET



ORDERING LOGIC: STR9® MOUNTING ACCESSORIES

CLP - CLIP MOUNT KIT, NON-ADJUSTABLE





COLOR	PART NUMBER
Stainless Steel	121148

CTLX- ADJUSTABLE CANTILEVER BRACKET

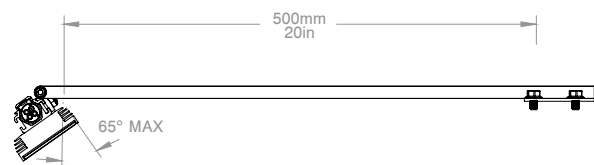

CTLH - HORIZONTAL MOUNTING BRACKET


COLOR	PART NUMBER
Clear Matte Anodized	121142
Black Matte Anodized	121143

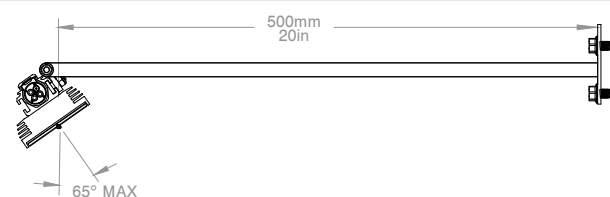

CTLV - VERTICAL MOUNTING BRACKET

COLOR	PART NUMBER
Clear Matte Anodized	121144
Black Matte Anodized	121145

MCD - CANTILEVER BRACKET, NON-ADJUSTABLE

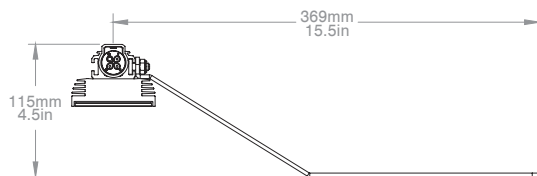

MCD

COLOR	PART NUMBER
Stainless Steel	121146

ORDERING LOGIC: POWER SUPPLIES & POWER DATA CONVERTORS

INFINITY POWER SUPPLIES, 100-240V AC

PS-INF 3000

INPUT TYPE	PART NUMBER
Single-Phase	G20260
Two-Phase	G20261

INFINITY POWER-DATA CONVERTORS

PDC-INF, INF+ZH, IP66

INPUT TYPE	PART NUMBER
1DMX	G20222
2DMX	G20228
0~10V DALI	G20223

ELV POWER SUPPLIES


FAMILY	OUTPUT VOLTAGE		POWER (Watts)		INPUT VOLTAGE	CONSTRUCTION	
PS	ELV24		60	240	120~277V AC	IP30 - Indoor IP66 - Outdoor	
			100	320			
	ELV48		240	480			
			320	640			
FAMILY	OUTPUT VOLTAGE	POWER (Watts)		CONTROL INPUT	OUTPUT	INPUT VOLTAGE	CONSTRUCTION
PDB	ELV24	60	240	0~10V	ELV+ZH - ELV Power & ZH Data	120~277V AC	IP30 - Indoor IP66 - Outdoor
		100	320	DALI			
	ELV48	240	480	DMX			
		320	640				

RGBW Color Changing Linear Wall Washing and Grazing Indoor LED Lighting

PRODUCT SPECIFICATION SHEET


ORDERING LOGIC: COMMON COMPONENTS

STR9® LEADER CABLE ELV




NOMINAL LENGTH	PART NUMBER
3m (10ft)	140723
9m (30ft)	140733
15m (50ft)	140724
CUSTOM	140732

STR9® LEADER CABLE INF




NOMINAL LENGTH	PART NUMBER
3m (10ft)	140725
9m (30ft)	140710
15m (50ft)	140726
CUSTOM	140727

STR9® JUMPER CABLE ELV




NOMINAL LENGTH	PART NUMBER
0.9m (3ft)	140729
1.8m (6ft)	140730
3.6m (12ft)	140731
CUSTOM	140728

STR9® JUMPER CABLE INF




NOMINAL LENGTH	PART NUMBER
0.9m / 3ft	140709
1.8m / 6ft	140734
3.6m / 12ft	140735
CUSTOM	140708

STR9® CONNECTOR DUST CAP, IP67 (must be used at the end of each run)



TYPE	PART NUMBER
STR9-INF	230855
STR-ELV	231182

STR9® GLARE CONTROL LOUVERS

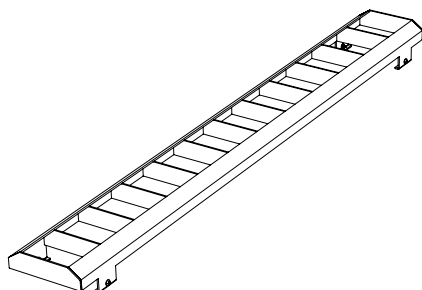

600mm LOUVER

COLOR	PART NUMBER
White	120939
Black	120933

900mm LOUVER

COLOR	PART NUMBER
White	120940
Black	120934

1200mm LOUVER

COLOR	PART NUMBER
White	120941
Black	120935

1500mm LOUVER

COLOR	PART NUMBER
White	120942
Black	120936