
# **FACTORYLUX®**

## TRACK-PIPE® HOOK MOUNTING

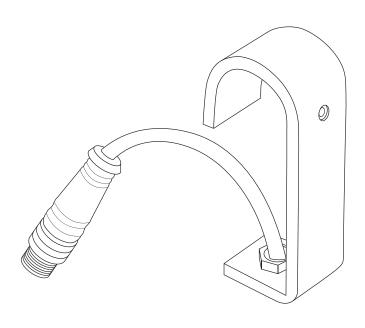

## TOOLS REQUIRED

· 2.5mm hex key

### **INSTALLATION NOTES**

- TRACK-PIPE® hook is only suitable for connection to TRACK-PIPE®
- · Luminaire only to be mounted with hook suspended vertically down
- Hook must be secured in place using wing bolt or grub screw prior to operation
- Ensure power to TRACK-PIPE® has been switched off for at least 1 minute prior to connecting the M12 connectors together

#### INSTALLATION

**WARNING**: Light fitting to be insulated and earthed in accordance with current wiring regs.

- 1. Switch off power to TRACK-PIPE® for at least 1 minute
- 2. Place luminaire hook over TRACK-PIPE® in desired location
- 3. Secure in place with wing bolt or grub screw using 2.5mm hex key
- 4. Locate the M12 plug connector on the cable and insert into the M12 socket connector on the TRACK-PIPE® connection box. Rotate the plug to align the lug on the plug with the slot in the socket (CAUTION: rotate with care to locate, do not force)
- 5. Push the plug connector into the socket connector and rotate the locking collar clockwise with your fingers until hand-tight.

## **ADJUSTING**


**WARNING**: Shut off power and allow to cool.

- If reconnecting to TRACK-PIPE® ensure power to TRACK-PIPE® has been off for at least 1 minute
- Loosen wing bolt or grub screw fully to change location on TRACK-PIPE®
- Tighten wing bolt or grub screw to same tightness as before
- Luminaire is adjusted according to its own user instruction

## YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been designed and hand built in the UK to give you many years of reliable service. Please read these user instructions carefully.

#### WHAT'S INCLUDED



## WARNING

- Shut off power before installation, adjusting or handling! Failure to do so will
  result in irreversible damage to the LED module and failure of the luminaire
- Only compatible with Factorylux TRACK-PIPE®
- Ensure TRACK-PIPE® has not been powered for at least one minute before connecting luminaire
- Light fitting to be installed by a competent person, in accordance with current wiring and building regs. Find an NICEIC registered contractor at factorylux.com
- Bathroom installation by authorised contractor only
- Must be permanently fixed to TRACK-PIPE® using wing bolt or grub screw
- · Must be installed out of arms reach

#### **TROUBLESHOOTING**

No user serviceable parts. In the event of failure, fault or damage shut off power and contact our technical department via factorylux.com

#### STAY UP TO DATE


We post regular design and product information via social media and our blog. You can also contact us via instant support or email support@factorylux.com

## HANDLING & CLEANING

WARNING: Shut off power and allow to cool

- Wipe gently with a dry, soft, cotton cloth
- Cleaning products, scratching, abrasion, damp, oils, liquids etc may have a detrimental effect

# **INSTALLATION DIAGRAM**

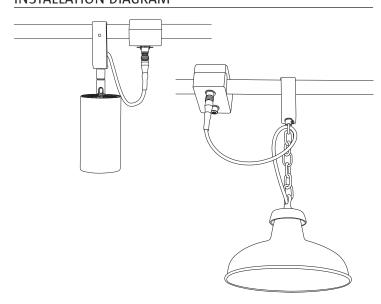

Designed, made & tested in the UK to BS EN 60598 1 INS TRACK-PIPEHook 1811