
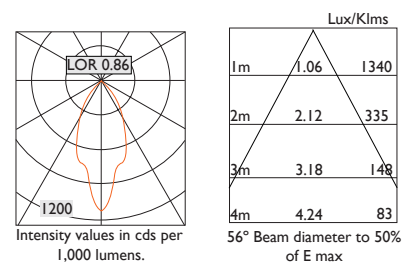


Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

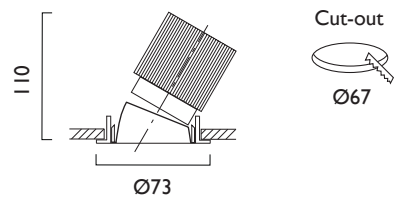

Product Number	C0264/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	White
Beam Angle	56°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency 1 I-10V 5 DALI 7 Lead / Trainling 9 Addressable Inverter & Driver 			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens for L and C products.





Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

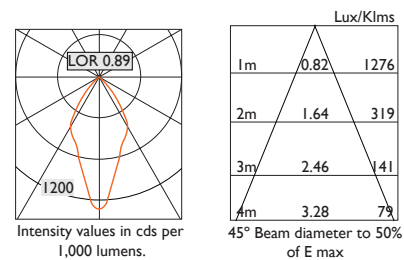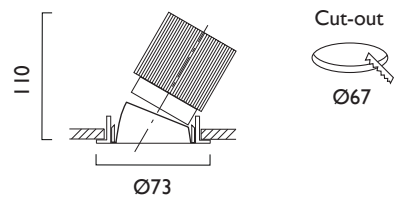

Product Number	C0254/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	White
Beam Angle	45°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency 1 I-10V 5 DALI 7 Lead / Trainling 9 Addressable Inverter & Driver 			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens for L and C products.





Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

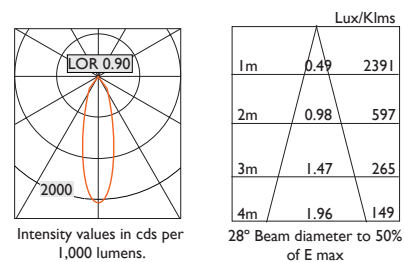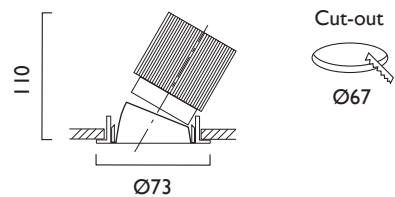

Product Number	C0234/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	White
Beam Angle	28°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<div> <div>No Emergency</div> <div>Maintained Emergency</div> <div>I-10V</div> <div>DALI</div> <div>Lead / Trainling</div> <div>Addressable Inverter & Driver</div> </div>			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens for L and C products.





Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

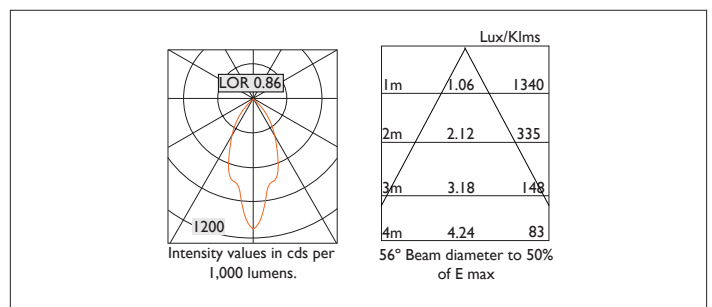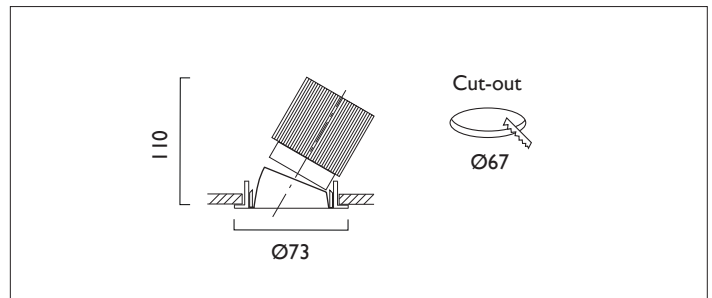

Product Number	C0263/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084lm
Reflector	Black
Beam Angle	56°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency 1 I-10V 5 DALI 7 Lead / Trainling 9 Addressable Inverter & Driver 			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens for L and C products.





Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

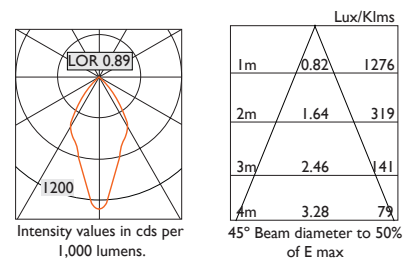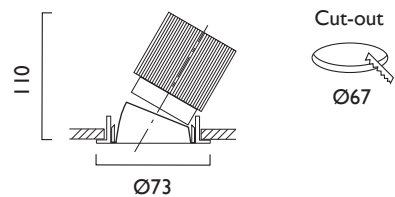

Product Number	C0253/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Black
Beam Angle	45°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	0 No Emergency E Maintained Emergency I 1-10V 5 DALI 7 Lead / Trainling 9 Addressable Inverter & Driver			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens for L and C products.





Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

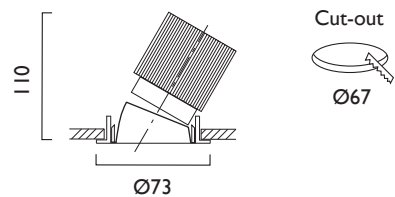

	Lux/Klms	
1m	0.49	2391
2m	0.98	597
3m	1.47	265
4m	1.96	149

28° Beam diameter to 50% of E max

Product Number	C0233/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Black
Beam Angle	28°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency 1 I-10V 5 DALI 7 Lead / Trainling 9 Addressable Inverter & Driver 			
3000K	3				
4000K	5				

Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens for L and C products.

