



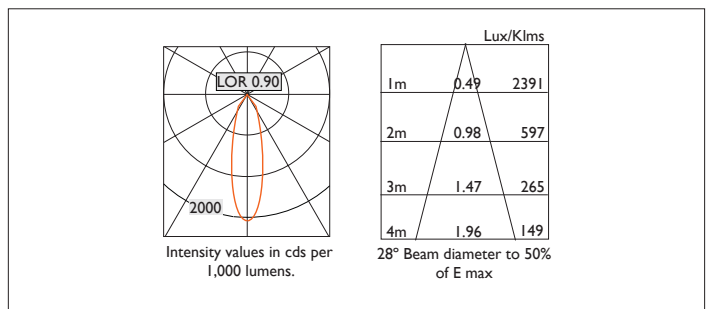

# Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

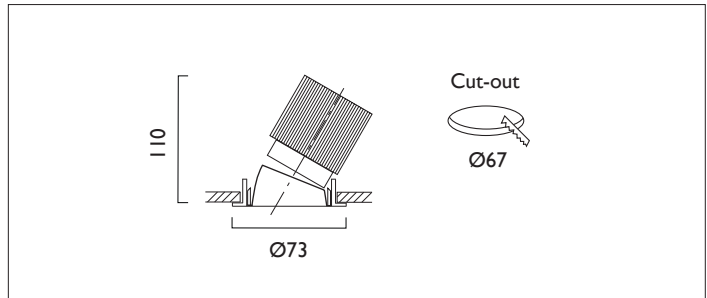

Product Number	C0238/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Spectro Silver
Beam Angle	28°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> <li>0 No Emergency</li> <li>E Maintained Emergency</li> <li>1 1-10V</li> <li>5 DALI</li> <li>7 Lead / Trainling</li> <li>9 Addressable Inverter &amp; Driver</li> </ul>			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.





# Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

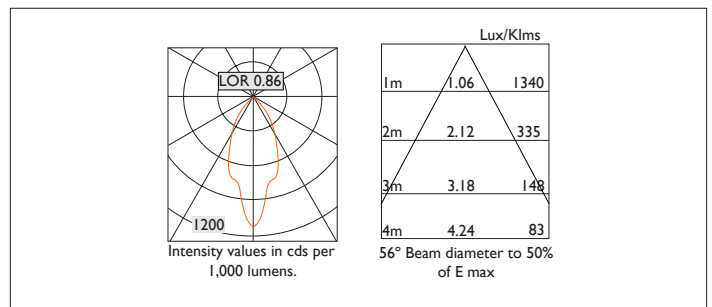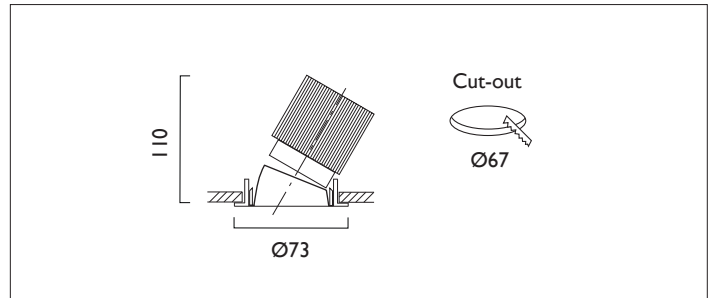

Product Number	C0265/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Gold
Beam Angle	56°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	0		No Emergency	
3000K	3	E		Maintained Emergency	
4000K	5	1		1-10V	
		5		DALI	
		7		Lead / Training	
		9		Addressable Inverter & Driver	



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.





# Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

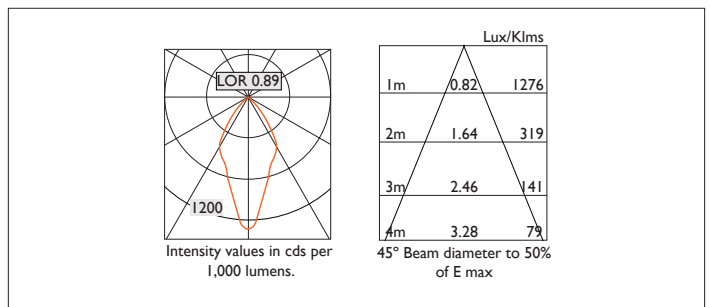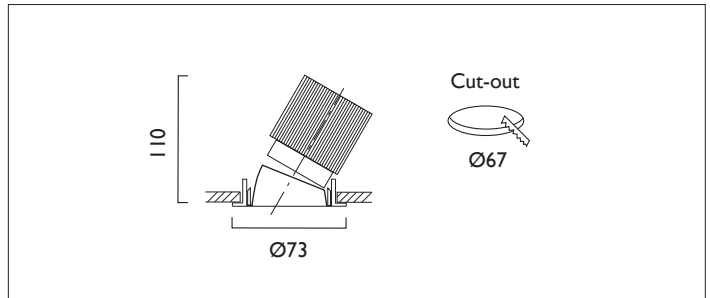

Product Number	C0255/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Gold
Beam Angle	45°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	0	No Emergency		
3000K	3	E	Maintained Emergency		
4000K	5	1	1-10V		
		5	DALI		
		7	Lead / Training		
		9	Addressable Inverter & Driver		



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.





# Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

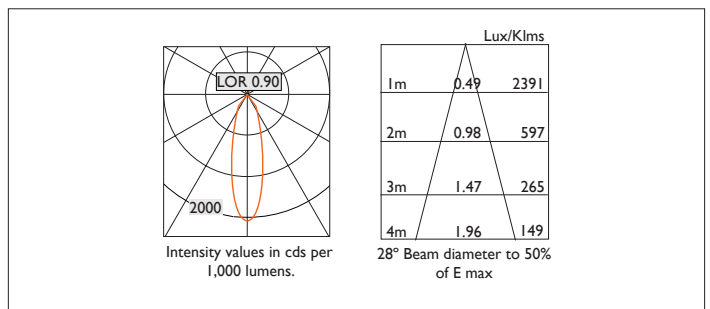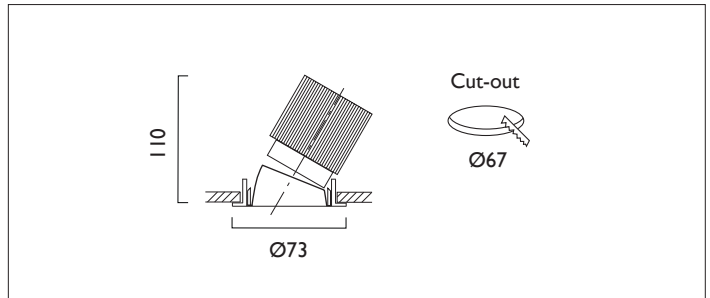

Product Number	C0235/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Gold
Beam Angle	28°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> <li>0 No Emergency</li> <li>E Maintained Emergency</li> <li>1 1-10V</li> <li>5 DALI</li> <li>7 Lead / Training</li> <li>9 Addressable Inverter &amp; Driver</li> </ul>			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.





# Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

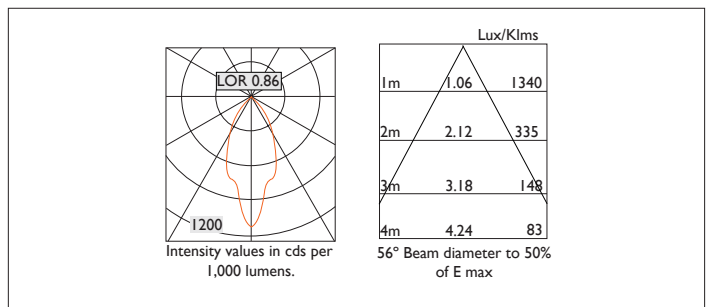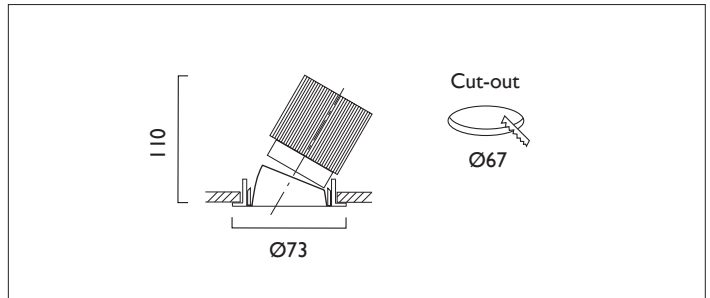

Product Number	C0268/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Spectro Silver
Beam Angle	56°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.


\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> <li>0 No Emergency</li> <li>E Maintained Emergency</li> <li>1 1-10V</li> <li>5 DALI</li> <li>7 Lead / Training</li> <li>9 Addressable Inverter &amp; Driver</li> </ul>			
3000K	3				
4000K	5				



Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.





# Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

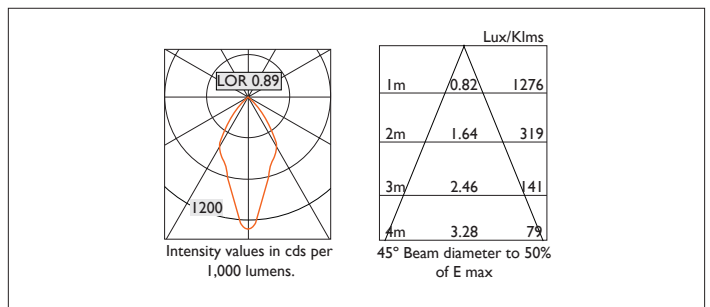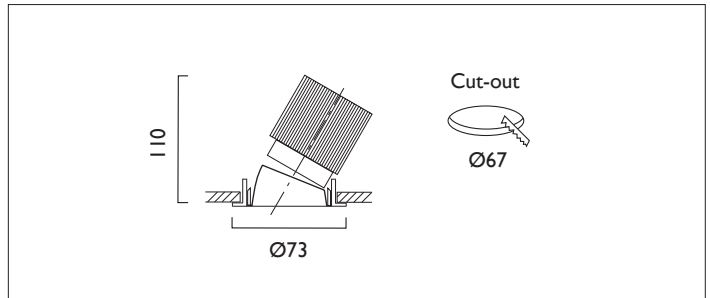

Product Number	C0258/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1084 lms
Reflector	Spectro Silver
Beam Angle	45°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

090	---	904 lm	6.2W	145lm/W	180mA
100	---	1084 lm	7.8W	128lm/W	220mA
2700K	2	<ul style="list-style-type: none"> <li>0 No Emergency</li> <li>E Maintained Emergency</li> <li>1 1-10V</li> <li>5 DALI</li> <li>7 Lead / Training</li> <li>9 Addressable Inverter &amp; Driver</li> </ul>			
3000K	3				
4000K	5				

Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.

