
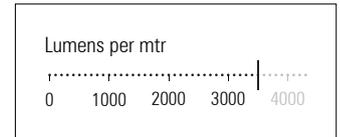
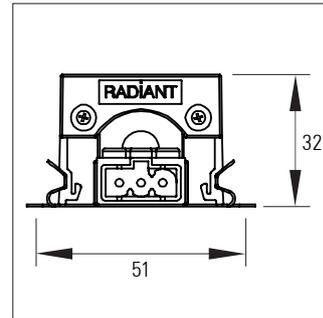


Euclid 40 IP 20

LED linear lighting system IP 20

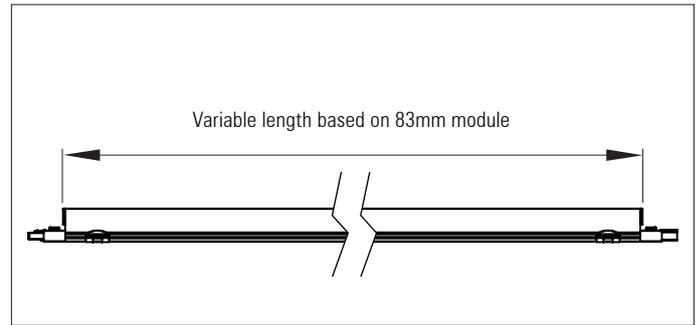

Euclid 40 IP 20

IP 20 rated LED linear lighting system

Product description:

Interior cove lighting applications

Integral DC to DC low voltage drivers. Remote 24 V DC power supply

0.3 Watt Samsung / Osram LEDs, without lenses

Up to 50 Watts per Mtr

Various LED colour temperature and CRI options available

Anodized or any RAL paint colour finish





Radiant can supply this system in custom lengths based on a 83 mm module.
Minimum length 170mm up to a maximum of 2.5 mtrs

Various mounting options and bracket types are available

16 Amp IP20 connectors join strips together on-site

Various dimming options available: 1 - 10, DALI, DMX. Separate dimming channel

Side, back and end power feed options allow continuous lighting without dark areas - LED pitch is maintained between the individual luminaires

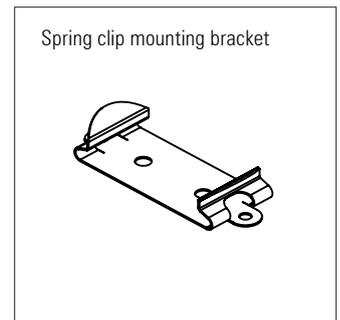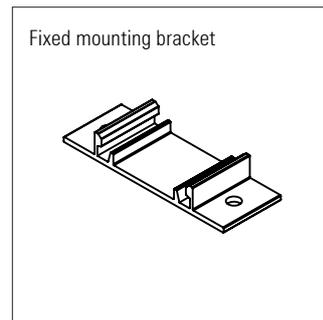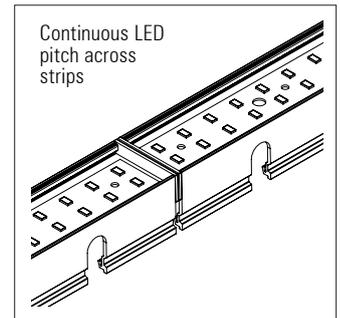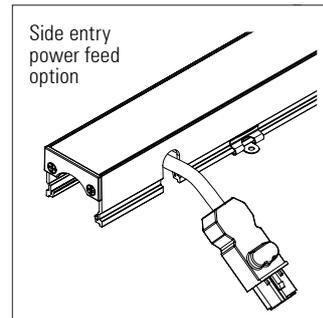

Product Code	IP	No. of LEDs per mtr.	Length (mm)	Colour Temp. (K)	CRI	Optics	Bracket Type	Cover	Feed	Finish
EUCLID 40	20	144 = 25mm LED spacing	170mm -increments of 83mm up to- 2,500mm	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k RGB RGBW RGBA	80 90	120°	Spring clip Fixed	Clear Frosted	End Back	Anodized Any RAL- colour