




TAYO Micro (Indoor)

Specification sheet



PRODUCT SPECIFICATION

| | |
|-----------------------|--|
| Dimension | H57.7/Ø30mm (H2.27/Ø1.18in) |
| Chip | Citizen |
| Beam angle | Diffused: 160° |
| Colours | White: 2700K/3000K/3500K/5000K Single colours: Red/Green/Blue |
| Bin/Step | 3 Step MacAdam ellipse |
| CRI | 80 |
| Lifetime | 50,000 hours @ 25°C (50,000 hours @ 77°F) |
| Operating temp | T _a = -25 to 60°C (T _c max = 65°C) T _a = -25 to 140°F (T _c max = 149°F) |
| IP rating | IP54 |
| Finish | Silver anodised |
| Cover/lens | Diffused |
| Mounting | Recessed mounting |
| Connection | Single sheathed tail |
| Control | 0-10V/1-10V/DMX/DALI (see visDIM range) |

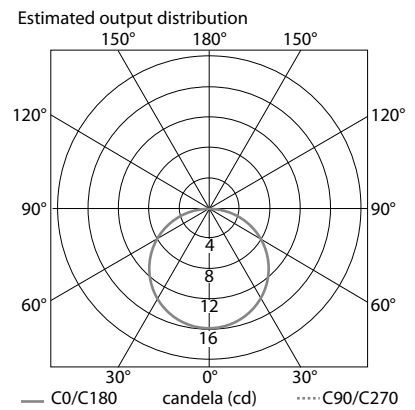

PERFORMANCE DATA for 2700K

| | |
|--------------------------|--------|
| Power consumption | 0.144W |
| Supply voltage | 12V DC |
| Supply current | 0.012A |
| Luminous flux | 3.25lm |

TECHNICAL DRAWING

