



# TAYO Spot


## Specification sheet



12V DC   1.62W   30.2 lm/W   IP67    

### PRODUCT SPECIFICATION

<b>Dimension</b>	H63/Ø56mm (H2.48/Ø2.20in)
<b>Chip</b>	Cree
<b>Beam angle</b>	10°/20°/30°/60°/Linear Beam
<b>Colours</b>	White: 2800K/3000K/3200K/3800K/5000K/6500K Single colours: Red/Green/Blue
<b>Bin/Step</b>	2 Step MacAdam ellipse (2800K/3000K/3200K/3800K) 4 Step MacAdam ellipse (5000K/6500K)
<b>CRI</b>	80 (2800K~3800K)/75 (5000K)/70 (6500K)
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -25 to 50°C (T <sub>c</sub> max = 70°C) T <sub>a</sub> = -25 to 122°F (T <sub>c</sub> max = 158°F)
<b>IP rating</b>	IP67
<b>Finish</b>	Stainless steel 304
<b>Cover/lens</b>	Clear Glass/10°/20°/30°/60°/Spread Lens
<b>Mounting</b>	Recessed mounting
<b>Connection</b>	Single sheathed tail
<b>Control</b>	0-10V/1-10V/DMX/DALI (see visDIM range)

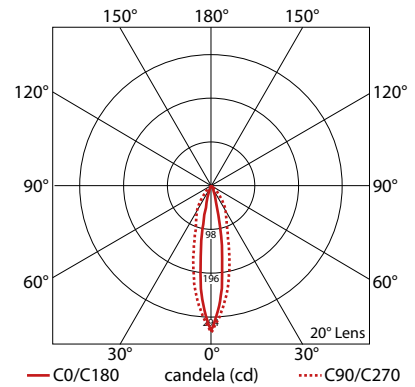

### PERFORMANCE DATA for 3200K

<b>Power consumption</b>	1.62W
<b>Supply voltage</b>	12V DC
<b>Supply current</b>	0.135A
<b>Luminous flux</b>	49lm

### TECHNICAL DRAWING

