

A low power flexible indirect view LED strip in tuneable white dual chip format

LIGHT OUTPUT

CCT/LED Colour (K)	2400K - 4500K
CRI	80
Luminaire Lumens	N/A
Optical Data/Beam Angle (°)	Diffused
LED Binning	3 SDCM

ELECTRICAL

Watts per meter (W/m)	15
Input Voltage	24 VDC (23V min, 25V max)
Connection Type	JST JWPF IP67
Maximum Chain Length (mm)	4800
Approx. Power Consumption (W)	1
Dimmable	Yes
Max Luminaire Length (mm)	4808

PHYSICAL & ENVIROMENTAL

Finish	White PU Resin
Length (mm)	58
Ambient Storage Temperature (°C)	-30 to +85
Ambient Operating Temperature (°C)	-10 to +50
IP Rating	IP67
IK Rating	03
LED Pitch (mm)	8.33
Cable Exit/Entry	End Exit
Weight (g)	5.98

PRODUCT FEATURES


- Flexible polyurethane resin luminaire
 - Dimmable via remote LED driver
 - Uses reel to reel LED tape
- Outdoor rated to IP67 rating
 - 3 SDCM LED binning
 - A range of colour temperatures available
- 24V input for SELV compliance
 - Lumileds or Nichia LED inside



SPECIFICATION TEXT

Our flexible low-profile top view polyurethane encapsulated LED strip. Allows for bending in a top direction. It is provided with IP67 plug in male/female connectors. 15 x 5.95mm / 0.59" x 0.23" cross section.

DIMENSIONS

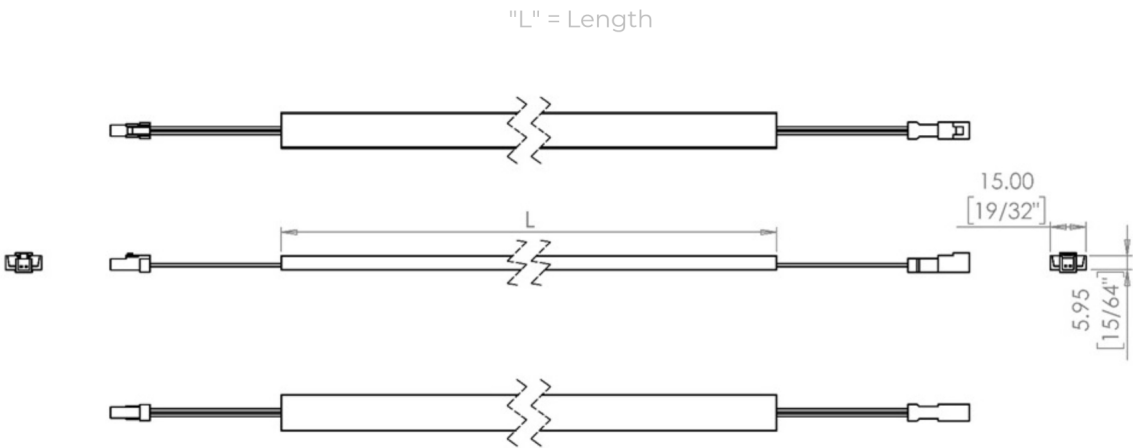

PART NUMBER: VEX-FLEXI-MINILINE-TW - 2400K - 4500K - 58 - 15W - IP67 - DIF

Provided data are typical values. Due to tolerances of the production process, figures for light output, electrical data ect can vary up to 10%. The Tc-point must be measured in thermal equilibrium in accordance to IEC EN 60598-1.

