



## GENERAL SPECIFICATION

**Body and trim:** Low copper, die-cast aluminum highly resistant to oxidation.

**Diffuser:** 3mm/0.12" tempered glass/convex lens.

**Gasket:** Silicone.

**Finish:** Powder coated.

**External screws:** A4 stainless steel treated with highly antioxidant water-repellent lubricating solution to ensure easy opening.

**Cable entry:** M20 gland for DIA 8-12mm/0.2-0.47" cables.

**Drivers:** HPF, electronic for 120V/277V.

**Mechanical:** For surface mounting.

**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI).


## MOUNTING & OPTICS




Ext-Wall Downlight




Ext-Wall Up/Down




830 8132



830 8134



830 8138



830 8140

## HOW TO ORDER

## A SPECIFY LUMINAIRE

| Code:    | Power (LED): | Distribution:                    | Delivered lms: |
|----------|--------------|----------------------------------|----------------|
| 830 8140 | 6W           | 2° x 35° Asymmetrical Narrow     | 31             |
| 830 8130 | 26W          | 32° Medium Down                  | 361            |
| 830 8132 | 26W          | 2° x 32° Medium Up/Down          | 898            |
| 830 8138 | 16W          | 4 x (2°x35°) Asymmetrical Narrow | 118            |
| 830 8134 | 26W          | 4 x 32° Medium                   | 449            |
| 830 8136 | 6W+18W       | Spot Up/Flood Down               | ---            |

## B SPECIFY CCT

|    |                    |
|----|--------------------|
| 30 | 3000K (min 80 CRI) |
| 40 | 4000K (min 80 CRI) |

## C SPECIFY FINISH

|    |                 |
|----|-----------------|
| BL | Black           |
| AG | Anthracite Gray |
| GR | Gray RAL 9006   |


## D SPECIFY DIMMING

|     |                                      |
|-----|--------------------------------------|
| DB  | Dimming 0-10V, 10%                   |
| DB1 | Dimming Trailing Edge 120V only (6W) |

## EXAMPLE CODE

8308130/30/BL

DIMENSIONAL DIAGRAMS

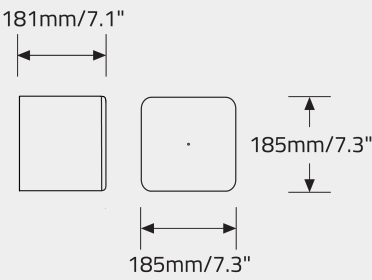

APPROVALS

