



GENERAL SPECIFICATION

Product Overview:

Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" & 24", the Warp family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the Warp are a wide array of contemporary decorative colors to accent your architectural scene.

Body: Aluminum and steel.

Canopy finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffuser: Acrylic.

Drivers: HPF electronic drivers for 120-277V (EU-240V)

Integral emergency system: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency EU luminaires have a 270mm/10.5" DIA x 48mm/2" height canopy with LED charge indicator. Not available with a 347V supply.

Remote emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical: Luminaires mount directly to a J box (by others - North America only).

L70 @25deg C: > 50,000 hrs.

Delivered lumens: Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals: Damp Location (Indoor use only).


U.S. Design Patent Pending.

Designed by: Serge Cornelissen.


MOUNTING & OPTICS



Suspended Direct



Direct



Spot Only

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Light Direction:	Wattage:	Delivered lms:	LPW:	Height (B):
AP1	457mm/18"	Direct	22W	3262	146	152mm/6"
AP2	610mm/24"	Direct	34W	4873	145	165mm/6.5"

B SPECIFY CCT

J2	3000K (min 80 CRI)
J3	3500K (min 80 CRI)
J4	4000K (min 80 CRI)

C SPECIFY DIMMING

D1	0-10V Dimming (1.0%)
D2	0-10V Dimming (0.1%)
D3	347V, 0-10V Dimming (1.0%)
D4	DALI Dimming (0.1%)
D5	DALI Dimming (1.0%)
D6	DSI (EU only)
D7	switchDim (EU only)

Additional Information

D6 & D7 dimming not available in North America

D SPECIFY FIXTURE FINISH

F1	White
F25	Gold Metallic
F44	Midnight Blue Metallic - Textured
F45	Copper Metallic
F46	Charcoal Metallic - Textured
F47	Bronze Metallic - Textured
F50	Black Metallic - Textured
F52	Champagne Metallic
F53	Red Metallic - Textured
F54	Silver Metallic - Textured

E SPECIFY CANOPY FINISH

BY1	White
BY25	Gold Metallic
BY44	Midnight Blue Metallic - Textured
BY45	Copper Metallic
BY46	Charcoal Metallic - Textured
BY47	Bronze Metallic - Textured
BY50	Black Metallic - Textured
BY52	Champagne Metallic
BY53	Red Metallic - Textured
BY54	Silver Metallic - Textured

F SPECIFY LUMEN OUTPUT

- L0** 100% of standard output
- L1** Lumen & wattage reduction to approximately 75% of standard output
- L2** Lumen & wattage reduction to approximately 50% of standard output
- L3** Lumen & wattage reduction to approximately 25% of standard output

Additional Information

Custom reduction percentages available upon request.

G SPECIFY EMERGENCY

- E0** Emergency system not required
- E1** Integral emergency system (*not available with D3*)
- E2** Remote emergency

H SPECIFY DOWNLIGHT SPOT

- BX0** Downlight not required
- BX1** Downlight 28W, 2700K (*1730 delivered lms*)
- BX2** Downlight 28W, 3000K (*1799 delivered lms*)
- BX3** Downlight 28W, 3500K (*1854 delivered lms*)
- BX4** Downlight 28W, 4000K (*1858 delivered lms*)


Additional Information

Downlight is wired for a separate circuit.

EXAMPLE CODE

AP1/J3/D1/F44/BY1/L0/E0/BX3

DIMENSIONAL DIAGRAMS

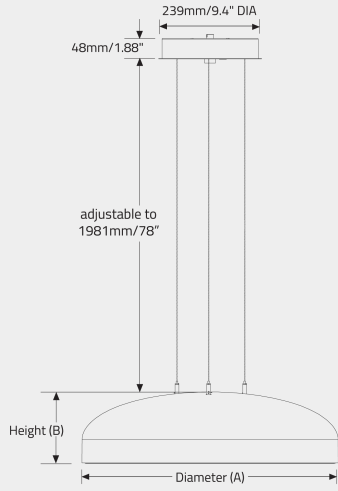

APPROVALS

